

## SERVICE FOR YOUR NADY AUDIO PRODUCT

**(U.S.)** Should your NADY AUDIO product require service, please contact the Nady Service Department via telephone at (510) 652-2411, or e-mail at [service@nady.com](mailto:service@nady.com).


**(International)** For service, please contact the NADY AUDIO distributor in your country through the dealer from whom you purchased this product.

DO NOT ATTEMPT TO SERVICE THIS UNIT YOURSELF AS IT CAN BE DANGEROUS AND WILL ALSO VOID THE WARRANTY.

# NADY<sup>®</sup> AUDIO

## OWNER'S MANUAL

**NADY<sup>®</sup> MM-141**  
**AUDIO 4-Channel Mini Mixer**

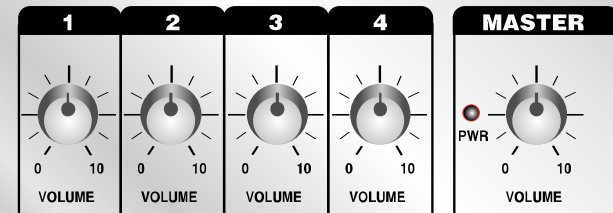

# NADY<sup>®</sup> AUDIO

NADY SYSTEMS, INC. • 6701 SHELLMOUND STREET, EMERYVILLE, CA 94608  
Tel: 510.652.2411 • Fax: 510.652.5075 • [www.nady.com](http://www.nady.com)

# MM-141

## 4-Channel Mini Mixer

## MM-141



Congratulations on your choice of the mini mixer - you have purchased one of the finest mini mixers on the market today. This unit was developed using the expertise of professional sound engineers and working musicians. You will find that your new NADY MM-141 has superior performance and greater flexibility than any other mini mixers in its price range. Please read this manual carefully to get the most out of your new unit.

Thanks for selecting NADY AUDIO as your choice in mini mixer.

## FEATURES

### MM-141


- Four 1/4" unbalanced line level inputs with individual volume controls mixed to one 1/4" unbalanced output.
- Master Volume control with integrated Power on/off switch and power on LED indicator
- Ultra low distortion, up to 20dB of gain, S/N ratio over 100dB, and a frequency response from 20Hz-20KHz
- Heavy-duty steel construction with smooth-turn, ultra-stable pots and high quality jacks
- 9VDC powered with either 9V alkaline battery or optional PAD-1 AC/DC external adapter

## NOTICE

The information in this document is subject to change, as the Company may make changes to product in order to improve reliability, design, or function, without prior written notice. No part of this manual may be reproduced or transmitted in any form or by any means without the written permission of the company.

***IN NO EVENT WILL THE COMPANY BE LIABLE FOR SPECIAL INCIDENTAL OR CONSEQUENTIAL DAMAGES, WHETHER ARISING DIRECTLY OR INDIRECTLY, SUCH AS LOSS OF PROFIT OR GOOD WILL, THAT MAY BE SUFFERED IN CONNECTION WITH THE PURCHASE OF THIS PRODUCT OR FROM THE BREACH OF ANY REPRESENTATION OR WARRANTY.***

## CONTROLS AND CONNECTIONS

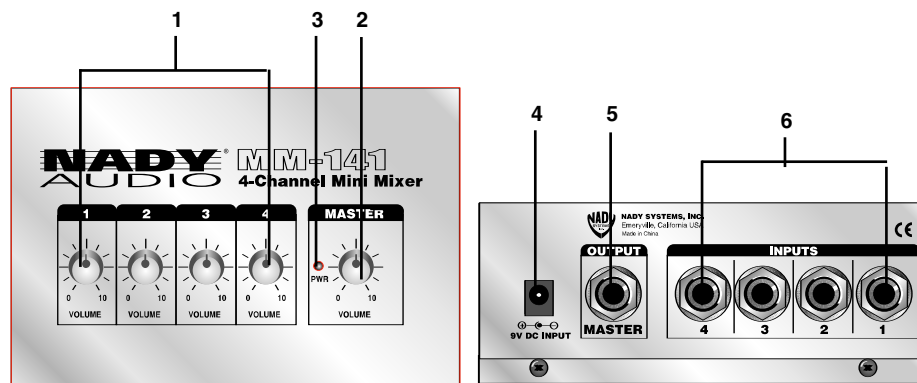

- 1. CHANNEL VOLUME CONTROLS** — These controls separately adjust the volume of the each input.
- 2. POWER SWITCH / MASTER VOLUME CONTROL** — This control turns the mixer on/off and adjusts the volume of the output.
- 3. POWER LED** — Lights when powered on.
- 4. DC INPUT** — Input socket for the optional PAD-1 9V AC/DC adapter. When you use external DC power, the built-in battery power will turn off automatically.
- 5. MASTER OUTPUT** — 1/4" unbalanced output.
- 6. INPUT CHANNELS** — 1/4" unbalanced inputs designed for line level inputs.

## SPECIFICATIONS

Input Impedance .....	45K $\Omega$
Maximum Input .....	+5 dBm (1.8 V)
Output Impedance .....	900 $\Omega$
Maximum Output.....	+6.7dBm, 1.7V
Gain .....	20dB
Frequency Respond.....	20Hz – 30KHz
THD .....	0.07%
S/N .....	-103dB
Noise Floor .....	120uV
Current Drain .....	10mA
9V Battery Life .....	up to 60 hours
Power Requirements .....	9V battery or optional PAD-1 AC/DC adapter
Dimensions .....	5.8" x 4.3" x 2.1" (147 mm x 109 mm x 53 mm)
Weight .....	1.25 lbs (0.57 Kg)