


ViewPad E100 3G (E100_US2)

Configuring a 3G Network (3G Model)




IMPORTANT: Make sure your ViewPad E100 is powered off before installing a SIM card.

1. Insert the SIM card as shown. Make sure the gold contacts are facing up, and the SIM card notch is aligned with the notch labeling. Do not force the SIM card in.

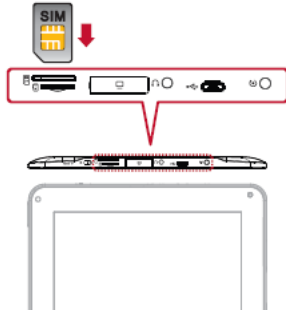

2. Power on the ViewPad E100.
3. From the application menu, tap **Settings** > **Wireless & Networks** > **More** > **Mobile Networks**.

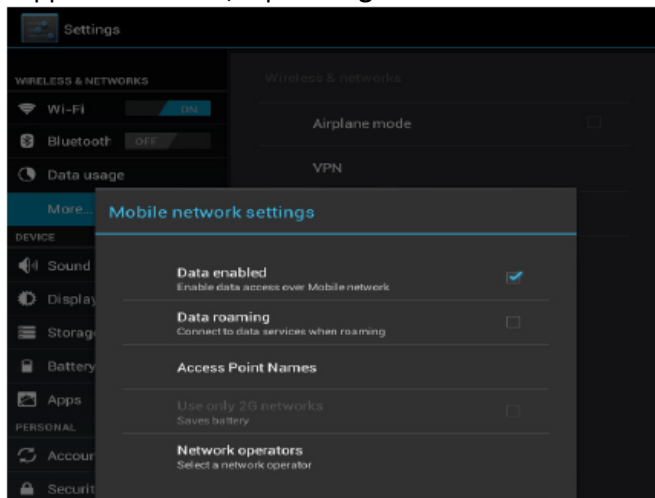

- **Data enabled:** Place a check mark on the check box to turn 3G on (enabled by default).



NOTE: 3G must be on in order to use 3G network.

- **Data roaming:** If you are in Roaming (out of the covered zone), place a check mark on the Data roaming check box to build the data connect services.



Caution: You may incur roaming charges.

- **ACCESS Point Names:** Shows available APN listings in your local area. New APN settings can be entered on this tab. APN settings information can be obtained from your carrier or online.

- **Use only 2G networks:** Place a check mark on the check box to use 2G network only.

- **Network operators:** Search and show the available 3G network providers in your local area.

- a. Tap on **ACCESS Point Names** to show available APN listings in your local area. If your APN is not listed, tap on the top-right-hand corner (three squares) and select **New APN**.
- b. Enter the APN settings for your 3G SIM card provider and then press the back arrow button twice to return to the **Mobile network settings**. Your APN settings have been saved on the ViewPad E100.
- c. Tap on **Network operators** > **Search networks** to search the available 3G network providers in your local area. Select your 3G network provider for the ViewPad E100 to connect to.
- d. If the ViewPad E100 3G is connected to a 3G network successfully, the 3G icon appears on the status bar.