



Lenovo C540  
Hardware Maintenance Manual



ideaideaideaCentreidea

Machine Types: 10110/6267 [C540]





Lenovo C540  
Hardware Maintenance Manual

Machine Types: 10110/6267 [C540]

**First Edition (November 2012)2nd**

**© Copyright Lenovo 2012.**

LIMITED AND RESTRICTED RIGHTS NOTICE: If data or software are delivered pursuant a General Services Administration "GSA" contract, use, reproduction, or disclosure is subject to restrictions set forth in Contract No. GS-35F-05925

---

# Contents

|  |           |  |           |
|--|-----------|--|-----------|
| <b>Chapter 1. About this manual . . . . .</b>                            | <b>1</b>  | <b>Chapter 8. Replacing hardware . . . . .</b>   | <b>27</b> |
| Important Safety Information . . . . .                                   | 1         | General information . . . . .                    | 27        |
| <b>Chapter 2. Safety information . . . . .</b>                           | <b>3</b>  | Replacing the keyboard and mouse . . . . .       | 28        |
| General safety . . . . .   | 3         | Replacing the adapter . . . . .                  | 28        |
| Electrical safety . . . . .  | 3         | Removing the stand base . . . . .                | 30        |
| Safety inspection guide . . . . .  | 5         | Removing the foot cover . . . . .                | 30        |
| Handling electrostatic discharge-sensitive devices . . . . .             | 5         | Replacing a memory module . . . . .              | 31        |
| Grounding requirements . . . . .   | 6         | Replacing the hard disk drive . . . . .          | 33        |
| Safety notices . . . . .   | 6         | Replacing the optical drive . . . . .            | 34        |
| <b>Chapter 3. General information . . . . .</b>                          | <b>9</b>  | Removing the stand holder . . . . .              | 36        |
| Specifications . . . . .   | 9         | Removing the middle cover . . . . .              | 37        |
| <b>Chapter 4. General Checkout . . . . .</b>                             | <b>11</b> | Replacing the converter board . . . . .          | 38        |
| <b>Chapter 5. Using the Setup Utility. . . . .</b>                       | <b>13</b> | Removing the EMI cover . . . . .                 | 39        |
| Starting the Lenovo BIOS Setup Utility program . . . . .                 | 13        | Replacing the rear I/O module . . . . .          | 40        |
| Viewing and changing settings . . . . .                                  | 13        | Replacing the TV tuner card . . . . .            | 41        |
| Using passwords. . . . .   | 13        | Replacing the WLAN card . . . . .                | 42        |
| Enabling or disabling a device . . . . .                                 | 15        | Replacing the speaker system . . . . .           | 43        |
| Selecting a startup device . . . . .                                     | 16        | Replacing the system fan . . . . .               | 44        |
| Exiting the Lenovo BIOS Setup Utility program . . . . .                  | 17        | Replacing the heat-sink . . . . .                | 45        |
| <b>Chapter 6. Symptom-to-FRU Index . . . . .</b>                         | <b>19</b> | Replacing the camera . . . . .                   | 46        |
| Hard disk drive boot error . . . . .                                     | 19        | Replacing the CPU . . . . .                      | 47        |
| Power Supply Problems . . . . .  | 19        | Replacing the front control board . . . . .      | 50        |
| POST error codes . . . . .   | 20        | Replacing the power switch board . . . . .       | 51        |
| Undetermined problems . . . . .  | 20        | Replacing the motherboard. . . . .               | 52        |
| <b>Chapter 7. Locating connectors, controls and components . . . . .</b> | <b>21</b> | Replacing the LED panel. . . . .                 | 53        |
|  |           | <b>Chapter 9. FRU lists . . . . .</b>            | <b>57</b> |
|  |           | <b>Chapter 10. General information . . . . .</b> | <b>63</b> |
|  |           | Additional Service Information . . . . .         | 63        |



---

## Chapter 1. About this manual

This manual contains service and reference information for Lenovo C540 All-In-One computers listed on the cover. It is intended only for trained servicers who are familiar with Lenovo computer products.

Before servicing a Lenovo product, be sure to read the Safety Information.

The description of the TV-tuner card in this manual applies only to computers with a TV-tuner card installed. It does not apply to computers without a TV-tuner card.

---

### Important Safety Information

Be sure to read all CAUTION and DANGER sections in this manual before following any of the instructions.

Veillez lire toutes les consignes de type DANGER et ATTENTION du présent document avant d'exécuter les instructions.

Lesen Sie unbedingt alle Hinweise vom Typ "ACHTUNG" oder "VORSICHT" in dieser Dokumentation, bevor Sie irgendwelche Vorgänge durchführen

Leggere le istruzioni introdotte da ATTENZIONE e PERICOLO presenti nel manuale prima di eseguire una qualsiasi delle istruzioni

Certifique-se de ler todas as instruções de cuidado e perigo neste manual antes de executar qualquer uma das instruções

Es importante que lea todas las declaraciones de precaución y de peligro de este manual antes de seguir las instrucciones.

执行任何说明之前，请确保已阅读本书中的所有警告和危险声明。

執行任何指示前，請確實閱讀本書中的所有警告及危險聲明。



---

## Chapter 2. Safety information

This chapter contains the safety information that you need to be familiar with before servicing a computer.

---

### General safety

Follow these rules to ensure general safety:

- Keep the areas around the computer clear and clean during and after maintenance.
- When lifting any heavy object:
  1. Ensure you can stand safely without slipping.
  2. Distribute the weight of the object equally across both feet.
  3. Lift slowly. Never move suddenly or twist when you attempt to lift.
  4. Lift by standing or by pushing up with your leg muscles; this action removes the strain from the muscles in your back.  
*Do not attempt to lift any objects that weigh more than 16 kg (35 lb) or objects that you think are too heavy for you.*
- Do not perform any action that would create a hazard for the customer, or would make the computer unsafe.
- Before you start the computer, ensure that other service representatives and customer personnel are not in a position that would create a hazard for them.
- Place removed covers and other parts in a safe place, away from all personnel, while you are servicing the computer.
- Keep your tool case away from areas that people may walk through to ensure no-one trips over it.
- Do not wear loose clothing that can be trapped in the moving parts of a machine. Ensure that your sleeves are fastened or rolled up above your elbows. If your hair is long, tie or fasten it back.
- Insert the ends of your necktie or scarf inside clothing or fasten it with a non-conductive clip, approximately 8 centimeters (3 inches) from the end.
- Do not wear jewelry, chains, metal-frame eyeglasses, or metal fasteners for your clothing.  
**Remember:** Metal objects are good electrical conductors.
- Wear safety glasses when you are: hammering, drilling soldering, cutting wire, attaching springs, using solvents, or working in any other conditions that might be hazardous to your eyes.
- After service, reinstall all safety shields, guards, labels, and ground wires. Replace any safety device that is worn or defective.
- Reattach all covers correctly before returning the computer to the customer.

---

### Electrical safety



#### **CAUTION:**

**Electrical current from power, telephone, and communication cables can be hazardous. To avoid personal injury or equipment damage, disconnect any attached power cords, telecommunication cables, network cables, and modem cables before you open the computer covers, unless instructed otherwise in the installation and configuration procedures.**

Observe the following rules when working on electrical equipment.

**Important:** Use only approved tools and test equipment. Some hand tools have handles covered with a soft material that does not insulate you when working with live electrical currents. Many customers have rubber floor mats near their equipment that contain small conductive fibers to decrease electrostatic discharge.

- Find the room emergency power-off (EPO) switch, disconnecting switch, or electrical outlet. If an electrical accident occurs, you can then operate the switch or unplug the power cord quickly.
- Do not work alone under hazardous conditions or near equipment that has hazardous voltages.
- Disconnect all power before:
  - Performing a mechanical inspection
  - Working near power supplies
  - Removing or installing Field Replaceable Units (FRUs)
- Before you start to work on the computer, unplug the power cord. If you cannot unplug it, ask the customer to power-off the electrical outlet that supplies power to the machine and to lock the electrical outlet in the off position.
- If you need to work on a computer that has exposed electrical circuits, observe the following precautions:
  - Ensure that another person, familiar with the power-off controls, is near you.  
**Remember:** Another person must be there to switch off the power, if necessary.
  - Use only one hand when working with powered-on electrical equipment; keep the other hand in your pocket or behind your back.  
**Remember:** There must be a complete circuit to cause electrical shock. By observing the above rule, you may prevent a current from passing through your body.
  - When using a tester, set the controls correctly and use the approved probe leads and accessories for that tester.
  - Stand on suitable rubber mats (obtained locally, if necessary) to insulate you from grounds such as metal floor strips and machine frames.

Observe the special safety precautions when you work with very high voltages; these instructions are in the safety sections of the maintenance information. Use extreme care when measuring high voltages.

- Regularly inspect and maintain your electrical hand tools to ensure they are safe to use.
- Do not use worn or broken tools and testers.
- *Never assume* that power has been disconnected from a circuit. First, *check* that it has been powered off.
- Always look carefully for possible hazards in your work area. Examples of these hazards are wet floors, non-grounded power extension cables, conditions that may cause or allow power surges, and missing safety grounds.
- Do not touch live electrical circuits with the reflective surface of a plastic dental mirror. This surface is conductive, and touching a live circuit can cause personal injury and damage to the computer.
- Do not service the following parts with the power on when they are removed from their normal operating positions in a computer:
  - Power supply units
  - Pumps
  - Blowers and fans
  - Motor generatorsand similar units. (This practice ensures correct grounding of the units.)
- If an electrical accident occurs:
  - Use caution; do not become a victim yourself.

- Switch off power.
- Send another person to get medical aid.

---

## Safety inspection guide

The intent of this inspection guide is to assist you in identifying potential hazards posed by these products. Each computer, as it was designed and built, had required safety items installed to protect users and service personnel from injury. This guide addresses only those items. However, good judgment should be used to identify potential safety hazards due to attachment of features or options not covered by this inspection guide.

If any hazards are present, you must determine how serious the apparent hazard could be and whether you can continue without first resolving the problem.

Consider the following items and the safety hazards they present:

- Electrical hazards, especially primary power (primary voltage on the frame can cause serious or fatal electrical shock).
- Explosive hazards, such as a damaged CRT face or bulging capacitor
- Mechanical hazards, such as loose or missing hardware

The guide consists of a series of steps presented as a checklist. Begin the checks with the power off, and the power cord disconnected.

Checklist:

1. Check exterior covers for damage (loose, broken, or sharp edges).
2. Power-off the computer. Disconnect the power cord.
3. Check the power cord for:
  - a. A third-wire ground connector in good condition. Use a meter to measure third-wire ground continuity for 0.1 ohm or less between the external ground pin and frame ground.
  - b. The power cord should be the appropriate type as specified in the parts listings.
  - c. Insulation must not be frayed or worn.
4. Remove the cover.
5. Check for any obvious alterations. Use good judgment as to the safety of any alterations.
6. Check inside the unit for any obvious hazards, such as metal filings, contamination, water or other liquids, or signs of fire or smoke damage.
7. Check for worn, frayed, or pinched cables.
8. Check that the power-supply cover fasteners (screws or rivets) have not been removed or tampered with.

---

## Handling electrostatic discharge-sensitive devices

Any computer part containing transistors or integrated circuits (ICs) should be considered sensitive to electrostatic discharge (ESD). ESD damage can occur when there is a difference in charge between objects. Protect against ESD damage by equalizing the charge so that the computer, the part, the work mat, and the person handling the part are all at the same charge.

**Notes:**

1. Use product-specific ESD procedures when they exceed the requirements noted here.
2. Make sure that the ESD protective devices you use have been certified (ISO 9000) as fully effective.

When handling ESD-sensitive parts:

- Keep the parts in protective packages until they are inserted into the product.
- Avoid contact with other people while handling the part.
- Wear a grounded wrist strap against your skin to eliminate static on your body.
- Prevent the part from touching your clothing. Most clothing is insulative and retains a charge even when you are wearing a wrist strap.
- Use the black side of a grounded work mat to provide a static-free work surface. The mat is especially useful when handling ESD-sensitive devices.
- Select a grounding system, such as those listed below, to provide protection that meets the specific service requirement.

**Note:** The use of a grounding system is desirable but not required to protect against ESD damage.

- Attach the ESD ground clip to any frame ground, ground braid, or green-wire ground.
- Use an ESD common ground or reference point when working on a double-insulated or battery-operated system. You can use coax or connector-outside shells on these systems.
- Use the round ground-prong of the AC plug on AC-operated computers.

---

## Grounding requirements

Electrical grounding of the computer is required for operator safety and correct system function. Proper grounding of the electrical outlet can be verified by a certified electrician.

---

## Safety notices

The CAUTION and DANGER safety notices in this section are provided in the language of English.



### DANGER

Electrical current from power, telephone and communication cables is hazardous.

#### To avoid a shock hazard:

- **Do not connect or disconnect any cables or perform installation, maintenance, or reconfiguration of this product during an electrical storm.**
- **Connect all power cords to a properly wired and grounded electrical outlet.**
- **Connect any equipment that will be attached to this product to a properly wired outlet.**
- **When possible, use one hand only to connect or disconnect signal cables.**
- **Never turn on any equipment when there is evidence of fire, water, or structural damage.**
- **Disconnect the attached power cords, telecommunications cables, network cables, and modem cables before you open the device covers, unless instructed otherwise in the installation and configuration procedures.**
- **Connect and disconnect cables as described in the following table when installing, moving, or opening covers on this product or attached devices.**

| To Connect   | To Disconnect   |
|--|---|
| <ol style="list-style-type: none"> <li>1. Turn everything OFF.</li> <li>2. First, attach all cables to devices.</li> <li>3. Attach signal cables to connectors.</li> <li>4. Attach power cords to outlet.</li> <li>5. Turn device ON.</li> </ol> | <ol style="list-style-type: none"> <li>1. Turn everything OFF.</li> <li>2. First, remove power cords from outlets.</li> <li>3. Remove signal cables from connectors.</li> <li>4. Remove all cables from devices.</li> </ol> |



**CAUTION:**

When replacing the lithium battery, use only Part Number 45C1566 or an equivalent type battery recommended by the manufacturer. If your system has a module containing a lithium battery, replace it only with the same module type made by the same manufacturer. The battery contains lithium and can explode if not properly used, handled, or disposed of.

*Do not:*

- Throw into or immerse in water
- Heat to more than 100°C (212°F)
- Repair or disassemble

Dispose of the battery as required by local ordinances or regulations.



**CAUTION:**

When laser products (such as CD-ROMs, DVD-ROM drives, fiber optic devices, or transmitters) are installed, note the following:

- Do not remove the covers. Removing the covers of the laser product could result in exposure to hazardous laser radiation. There are no serviceable parts inside the device.
- Use of controls or adjustments or performance of procedures other than those specified herein might result in hazardous radiation exposure.



Some laser products contain an embedded Class 3A or Class 3B laser diode. Note the following:

These diodes emit radiation when open. Do not stare into the beam, do not view directly with optical instruments, and avoid direct exposure to the beam.




|   |   |   |
|---|---|---|
|  |  |  |
| ≥18 kg (37 lbs)   | ≥32 kg (70.5 lbs)   | ≥55 kg (121.2 lbs)  |

**CAUTION:**  
Use safe practices when lifting.



**CAUTION:**  
The power control button on the device and the power switch on the power supply do not turn off the electrical current supplied to the device. The device also might have more than one power cord. To remove all electrical current from the device, ensure that all power cords are disconnected from the power source.



**CAUTION:**  
Do not place any object weighing more than 82 kg (180 lbs.) on top of rack-mounted devices.



---

## Chapter 3. General information

This chapter provides general information that applies to all computer models covered by this manual.

---

### Specifications

This section lists the physical specifications for your computer.

**This section lists the physical specifications for your computer.**

#### Type Lenovo C540

This section lists the physical specifications.

##### Environment

Air temperature:

Operating: 10° to 35°C

Transit: -20° to 55°C

Humidity:

Operating: 35% to 80%

Transit: 20% to 90% (40°C)

Altitude: 86KPa to 106KPa

Electrical input:

Input voltage: 90V-264V(AC)

Input frequency: 47Hz-63Hz



---

## Chapter 4. General Checkout

**Attention:** The drives in the computer you are servicing might have been rearranged or the drive startup sequence may have been changed. Be extremely careful during write operations such as copying, saving, or formatting. Data or programs can be overwritten if you select an incorrect drive.

General error messages appear if a problem or conflict is found by an application, the operating system, or both. For an explanation of these messages, refer to the information supplied with that software package.

Use the following procedure to help determine the cause of the problem:

1. Power-off the computer and all external devices.
2. Check all cables and power cords.
3. Set all display controls to the middle position.
4. Power-on all external devices.
5. Power-on the computer.
  - Look for displayed error codes.
  - Look for readable instructions or a main menu on the display.

If you did not receive the correct response, proceed to step 6.

If you did receive the correct response, proceed to step 7.

6. If one of the following happens, follow the instruction given:
  - If the computer displays a POST error, go to “POST error codes”.
  - If the computer hangs and no error is displayed, continue at step 7.
7. If the test stops and you cannot continue, replace the last device tested.



---

## Chapter 5. Using the Setup Utility

The Setup Utility program is used to view and change the configuration settings of your computer, regardless of which operating system you are using. However, the operating system settings might override any similar settings in the Setup Utility program.

---

### Starting the Lenovo BIOS Setup Utility program

To start the Lenovo BIOS Setup Utility program, do the following:

1. If your computer is already on when you start this procedure, shut down the operating system and turn off the computer.
2. Press and hold the **F1** key then turn on the computer. When the Lenovo BIOS Setup Utility program is displayed, release the **F1** key.

**Note:** If a Power-On Password or an Administrator Password has been set, the Setup Utility program menu will not be displayed until you type your password. For more information, see “Using passwords.”

---

### Viewing and changing settings

System configuration options are listed in the Lenovo BIOS Setup Utility program menu. To view or change settings, see “Starting the Setup Utility program.”

You must use the keyboard when using the Lenovo BIOS Setup Utility menu. The keys used to perform various tasks are displayed on the bottom of each screen.

---

### Using passwords

You can use the Lenovo BIOS Setup Utility program to set passwords to prevent unauthorized persons from gaining access to your computer and data. See “Starting the Setup Utility program.” The following types of passwords are available:

- Administrator Password
- Power-On Password

You do not have to set any passwords to use your computer. However, if you decide to set passwords, read the following sections.

#### Password considerations

A password can be any combination of letters and numbers up to 16 characters (a-z and 0-9). For security reasons, it is a good idea to use a strong password that cannot be easily compromised. We suggest that passwords should follow these rules:

- For a strong password, use 7-16 characters and a mix of letters and numbers.
- Do not use your name or your user name.
- Do not use a common word or a common name.
- Use something significantly different from your previous password.

**Attention:** Administrator and Power-On passwords are not case sensitive.

## Administrator Password

Setting an Administrator Password deters unauthorized persons from changing configuration settings. You might want to set an Administrator Password if you are responsible for maintaining the settings of several computers.

After you set an Administrator Password, a password prompt is displayed every time you access the Lenovo BIOS Setup Utility program.

If both the Administrator and Power-On Password are set, you can type either password. However, you must use your Administrator Password to change any configuration settings.

### Setting, changing, or deleting an Administrator password

To set an Administrator Password, do the following:

**Note:** A password can be any combination of letters and numbers up to 16 characters (a-z and 0-9). For more information, see “Password considerations” on page 13.

1. Start the Lenovo BIOS Setup Utility program (see “Starting the Lenovo BIOS Setup Utility program” on page 13).
2. From the **Security** menu, select **Set Administrator Password** and press the **Enter** key.
3. The password dialog box will be displayed. Type the password then press the **Enter** key.
4. Re-type the password to confirm, then press the **Enter** key. If you typed the password correctly, the password will be installed.

To change an Administrator Password, do the following:

1. Start the Lenovo BIOS Setup Utility program (see “Starting the Lenovo BIOS Setup Utility program” on page 13).
2. From the **Security** menu, select **Set Administrator Password** and press the **Enter** key.
3. The password dialog box will be displayed. Type the current password then press the **Enter** key.
4. Type the new password, then press the **Enter** key. Re-type the password to confirm the new password. If you typed the new password correctly, the new password will be installed. A Setup Noticed confirming that changes have been saved will be displayed.

To delete a previously set Administrator Password, do the following :

1. From the **Security** menu, select **Set Administrator Password** and press the **Enter** key.
2. The password dialog box will be displayed. Type the current password and press the **Enter** key.
3. To delete an **Administrator Password**, leave each new password line item blank, then press the **Enter** key. A Setup Notice confirming that changes have been saved will be displayed.
4. Return to the Lenovo BIOS Setup Utility program menu and select the **Exit** option.
5. Select **Save changes and Exit** from the menu.

## Power-On Password

When a Power-On Password is set, you cannot start the Lenovo BIOS Setup Utility program until a valid password is typed from the keyboard.

### Setting, changing, or deleting a Power-On Password

**Note:** A password can be any combination of letters and numbers up to 16 characters (a-z and 0-9).

To set a Power-On Password, do the following:

1. Start the Lenovo BIOS Setup Utility program (See "Starting the Lenovo BIOS Setup Utility program" on page 13.)
2. From the **Security** menu, select **Set Power-On Password** and press the **Enter** key.
3. The password dialog box will be displayed. Type the password, then press the **Enter** key.
4. Re-type the password to confirm. If you typed the password correctly, the password will be installed.

To change a Power-On Password, do the following:

1. Start the Lenovo BIOS Setup Utility program (See "Starting the Lenovo BIOS Setup Utility program" on page 13.)
2. From the **Security** menu, select **Set Power-On Password** and press the **Enter** key.
3. The password dialog box will be displayed. Type the current password then press the **Enter** key.
4. Type the new password, then press the **Enter** key. Re-type the password to confirm the new password. If you typed the new password correctly, the new password will be installed. A Setup Noticed confirming that changes have been saved will be displayed.

To delete a previously set Power-On Password, do the following :

1. From the **Security** menu, select **Set Power-On Password** and press the **Enter** key.
2. The password dialog box will be displayed. Type the current password and press the **Enter** key.
3. To delete the **Power-On Password**, leave each new password line item blank, then press Enter. A Setup Notice confirming that changes have been saved will be displayed.
4. Return to the Lenovo BIOS Setup Utility program menu and select the **Exit** option.
5. Select **Save changes and Exit** from the menu.

---

## Enabling or disabling a device

|   |  |
|---|--|
| The <b>Devices</b> options is used to enable or disable user access to the following devices: |  |
| <b>USB Functions</b>  | Select whether to enable or disable <b>USB</b> (Universal Serial Bus) functions. If the functions are disabled, no <b>USB</b> devices can be used.   |
| <b>SATA Mode</b>  | When this feature is set to <b>Disabled</b> , all devices connected to the SATA connectors (e.g. hard disk drives or the optical disk drive) are disabled and cannot be accessed.  |
| <b>Onboard Audio Controller</b>   | Select whether to enable or disable the <b>Onboard Audio Controller</b> . When this feature is set to <b>Disabled</b> all devices connected to the audio connectors (e.g. headphones or a microphone) are disabled and cannot be used. |
| <b>Onboard Ethernet Controller or LAN Boot Agent</b>  | Select whether to enable or disable the <b>Onboard Ethernet Controller</b> , or select whether to enable or disable load onboard <b>PXE (Preboot Execution Environment)</b> .  |

To enable or disable a device, do the following:

1. Start the Setup Utility program (see "Starting the Setup Utility program" on page 13).
2. From the Setup Utility program menu, select **Devices**.
3. Select an option as follows:

Select **USB Setup**, press the **Enter** key, then select **USB Functions**.

Select **ATA Device Setup**, press the **Enter** key, then select **SATA Mode**.

Select **Audio Setup**, press the **Enter** key, then select **Onboard Audio Controller**.

Select **Network Setup**, press the **Enter** key, then select **Onboard Ethernet Support** or **LAN Boot Agent**.

4. Select **Disabled** or **Enabled** and press the **Enter** key.
5. Return to the Lenovo BIOS Setup Utility program menu and select the **Exit** option.
6. Select **Save changes and Exit** from the menu.

**Notes:**

- a. If you do not want to save the settings, select **Discard changes and Exit** from the menu.
- b. Select IDE/AHCI Mode: Device driver support is required for AHCI. Depending on how the hard disk image was installed, changing this setting may prevent the system from booting.

---

## Selecting a startup device

If your computer does not boot from a device such as the CD/DVD-ROM drive disk or hard disk as expected, follow one of the procedures below.

### Selecting a temporary startup device

Use this procedure to start up from any boot device.

**Note:** Not all CDs, DVDs or hard disk drives are bootable.

1. Turn off your computer.
2. Press and hold the **F12** key then turn on the computer. When the **Startup Device Menu** appears, release the **F12** key.

**Note:** If the **Startup Device Menu** does not display using these steps, repeatedly press and release the **F12** key rather than keeping it pressed when turning on the computer.

3. Use **↑** and **↓** arrows to select the desired startup device from the **Startup Device Menu** and press the **Enter** key to begin.

**Note:** Selecting a startup device from the **Startup Device Menu** does not permanently change the startup sequence.

### Selecting or changing the startup device sequence

To view or permanently change the configured startup device sequence, do the following:

1. Start the Lenovo BIOS Setup Utility program (see “Starting the Lenovo BIOS Setup Utility program” on page 13).
2. From the Lenovo BIOS Setup Utility program main menu, select the **Startup** option.
3. Press the **Enter** key, and select the devices for the **Primary Boot Sequence**. Read the information displayed on the right side of the screen.
4. Use **-** and **^** arrows to select a device. Use the **<+>** or **<->** keys to move a device up or down. Use the **<x>** key to exclude the device from or include the device in the boot sequence.
5. Return to the Lenovo BIOS Setup Utility program menu and select the **Exit** option.
6. Select **Save changes and Exit** from the menu.

**Notes:**

- a. If you do not want to save the settings, select **Discard changes and Exit** from the menu.
- b. If you have changed these settings and want to return to the default settings, select **Load Optimal Defaults** from the menu.

---

## Exiting the Lenovo BIOS Setup Utility program

After you finish viewing or changing settings, press the **Esc** key to return to the Lenovo BIOS Setup Utility program main menu. You might have to press the **Esc** key several times. Do one of the following:

- If you want to save the new settings, select **Save changes and Exit** from the menu. When the **Save & reset** window shows, select the **Yes** button, and then press the **Enter** key to exit the Lenovo BIOS Setup Utility program.
- If you do not want to save the settings, select **Discard changes and Exit** from the menu. When the **Reset Without Saving** window shows, select the **Yes** button, and then press the **Enter** key to exit the Lenovo BIOS Setup Utility program.



---

## Chapter 6. Symptom-to-FRU Index

The Symptom-to-FRU index lists error symptoms and possible causes. The most likely cause is listed first. Always begin with Chapter 4, “General Checkout,” on page 11. This index can also be used to help you decide which FRUs to have available when servicing a computer. If you are unable to correct the problem using this index, go to “Undetermined problems” on page 20.

### Notes:

- If you have both an error message and an incorrect audio response, diagnose the error message first.
- If you cannot run the diagnostic tests or you get a diagnostic error code when running a test but did receive a POST error message, diagnose the POST error message first.
- If you did not receive any error message look for a description of your error symptoms in the first part of this index.

---

### Hard disk drive boot error

A hard disk drive boot error can be caused by the following.

| Error   | FRU/Action   |
|---|--|
| The startup drive is not included in the boot sequence configuration. | Check the configuration and ensure the startup drive is in the boot sequence.  |
| No operating system is installed on the boot drive.                   | Install an operating system on the boot drive.   |
| The boot sector on the startup drive is corrupted.                    | The drive must be formatted. Do the following: <ol style="list-style-type: none"><li>1. Attempt to back up the data on the failing hard disk drive.</li><li>2. Use the operating system to format the hard disk drive.</li></ol> |
| The drive is defective.   | Replace the hard disk drive.   |

---

### Power Supply Problems

Follow these procedures if you suspect there is a power supply problem.

| Check/Verify  | FRU/Action        |
|---|-------------------|
| Check that the following are properly installed: <ul style="list-style-type: none"><li>• Power Cord</li><li>• On/Off Switch connector</li><li>• System Board Power Supply connectors</li><li>• Microprocessor connections</li></ul> | Reseat connectors |
| Check the power cord.   | Power Cord        |
| Check the power-on switch.  | Power-on Switch   |

---

## POST error codes

Each time you turn the computer on, it performs a series of tests to check that the system is operating correctly and that certain options are set. This series of tests is called the *Power-On Self-Test*, or *POST*. POST does the following:

- Checks some basic motherboard operations
- Checks that the memory is working correctly
- Starts video operations
- Verifies that the boot drive is working

| POST Error Message  | Description/Action  |
|---|---|
| Keyboard error  | Cannot initialize the keyboard. Make sure the keyboard is properly connected to the computer and that no keys are held pressed during POST. To purposely configure the computer without a keyboard, select <b>Keyboardless operation</b> in <b>Startup</b> and set the option to <b>Enabled</b> . The BIOS then ignores the missing keyboard during POST. |
| Reboot and Select proper Boot device or Insert Boot Media in selected Boot device | The BIOS was unable to find a suitable boot device. Make sure the boot drive is properly connected to the computer. Make sure you have bootable media in the boot device.   |

---

## Undetermined problems

1. Power-off the computer.
2. Remove or disconnect the following components (if connected or installed) one at a time.
  - a. External devices (modem, printer, or mouse)
  - b. Extended video memory
  - c. External Cache
  - d. External Cache RAM
  - e. Hard disk drive
  - f. Disk drive
3. Power-on the computer to re-test the system.
4. Repeat steps 1 through 3 until you find the failing device or component.

If all devices and components have been removed and the problem continues, replace the system board.

---


## Chapter 7. Locating connectors, controls and components

This section provides illustrations to help locate the various connectors, controls and components of the computer.

### Front view

The following illustration shows the location of controls and components on the front of the computer.


**Attention:** Be careful not to block any air vents on the computer. Blocked air vents can cause overheating.

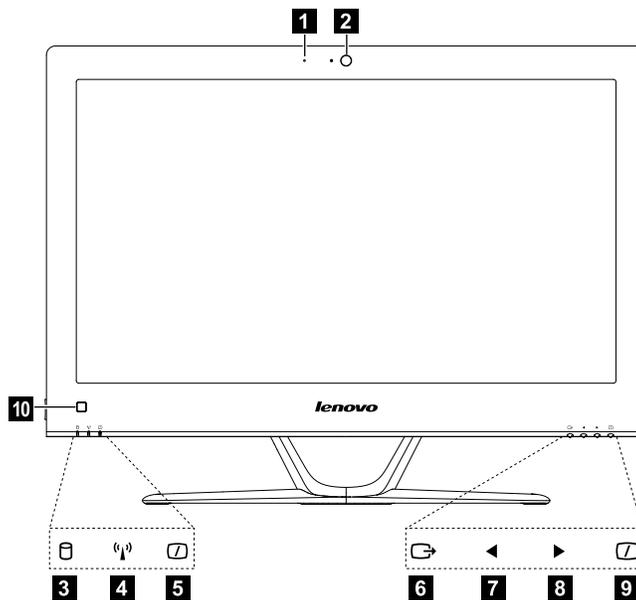

|                              |   |
|------------------------------|---|
| 1. Built-in microphone       | 6. Menu button  |
| 2. Built-in camera           | 7. Left direction button  |
| 3. Hard disk drive indicator | 8. Right direction button   |
| 4. Wi-Fi status indicator    | 9. Monitor On/Off button  |
| 5. Monitor On/Off indicator  | 10. Built-in IR receiver (Only functional on models equipped with a IR receiver module) |

## Left and right view

The following illustration shows the location of connectors, controls and components on the left and right side of the computer.

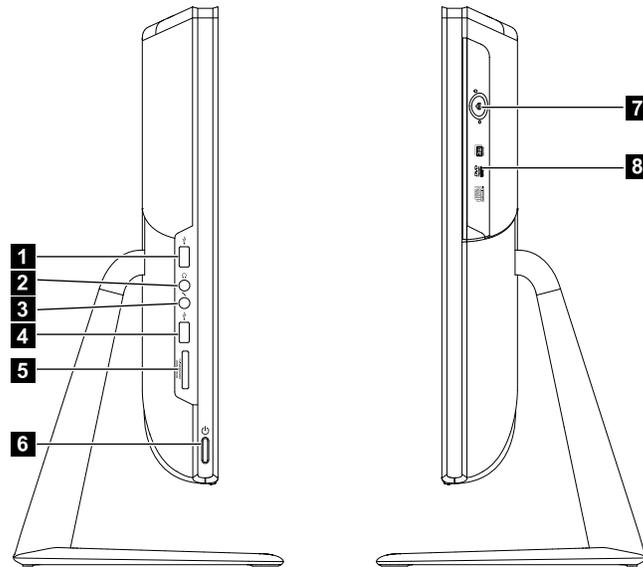


|                         |                               |
|-------------------------|-------------------------------|
| 1. USB connector        | 5. Memory card reader         |
| 2. Headphone connector  | 6. Power button               |
| 3. Microphone connector | 7. Optical drive eject button |
| 4. USB connector        | 8. Optical drive              |

**Attention:** Do not insert 3-inch discs into the optical drive.

## Rear view


The following illustration shows the location of connectors and components on the rear of the computer.

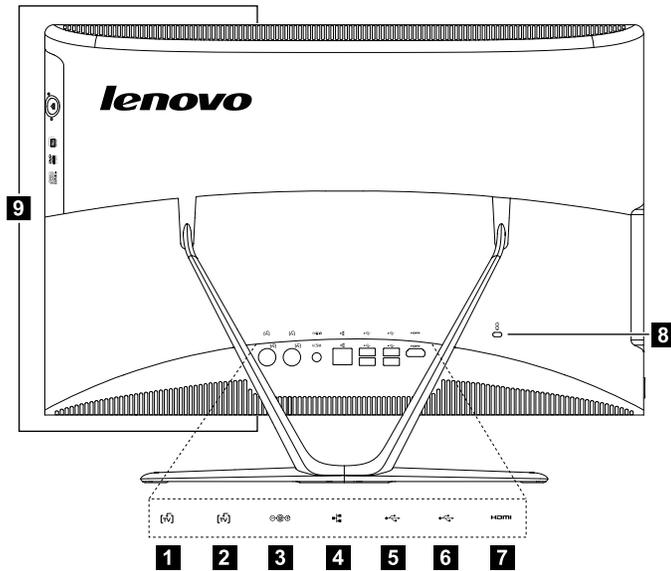

|  |  |
|--|--|
| 1. TV tuner connector (selected models only, 2 connectors for Japan) | 6. USB connector                             |
| 2. TV tuner connector (selected models only, 2 connectors for Japan) | 7. HDMI-out connector (selected models only) |
| 3. Power connector   | 8. Security cable slot                       |
| 4. Ethernet connector  | 9. Air vents                                 |
| 5. USB connector   |  |

## Hardware components


The following illustration shows the components that make up your computer.

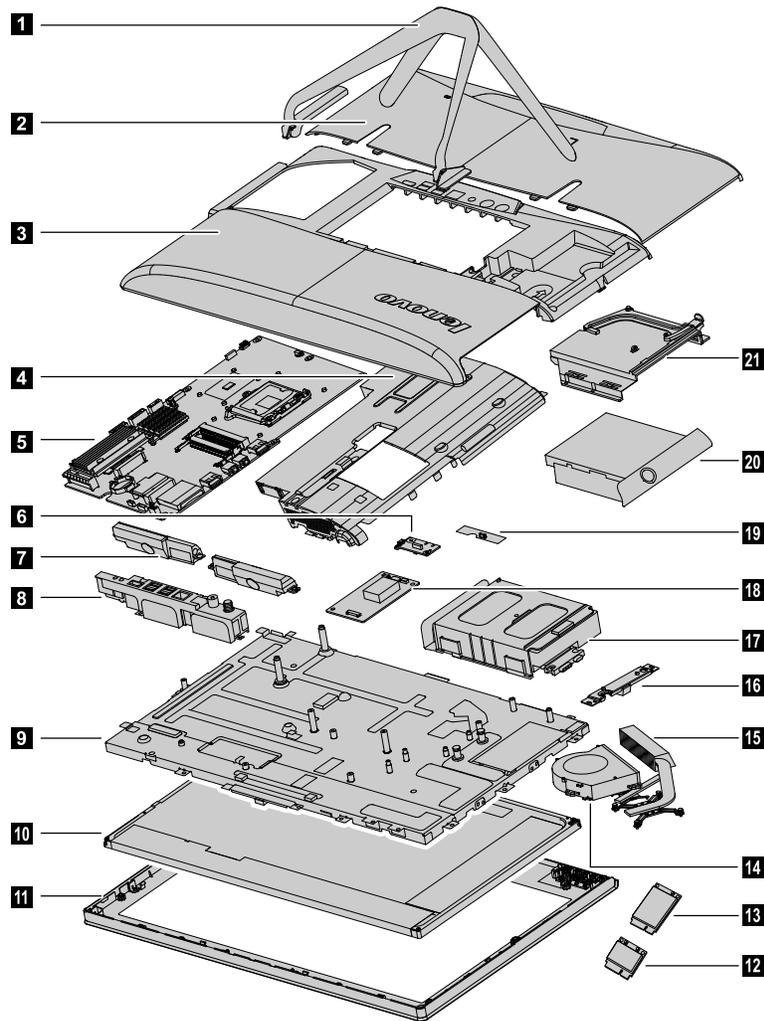

|                       |                             |
|-----------------------|-----------------------------|
| 1. Computer stand     | 12. Wi-Fi card              |
| 2. Foot cover         | 13. TV-Tuner card           |
| 3. Middle cover       | 14. System fan              |
| 4. EMI cover          | 15. Heat-sink               |
| 5. Motherboard        | 16. Camera                  |
| 6. Power switch board | 17. Hard disk drive and bay |
| 7. Speakers           | 18. Converter board         |
| 8. Rear I/O module    | 19. Front function board    |
| 9. Chassis            | 20. Optical drive           |
| 10. LED panel         | 21. Optical drive bracket   |
| 11. Front bezel       |                             |

## Identifying parts on the motherboard

The motherboard (sometimes called the planar or system board) is the main circuit board in your computer. It provides basic computing functions and supports a variety of devices that are factory-installed or that you can install later. The following illustration shows the location of connectors and components on the front of the motherboard.

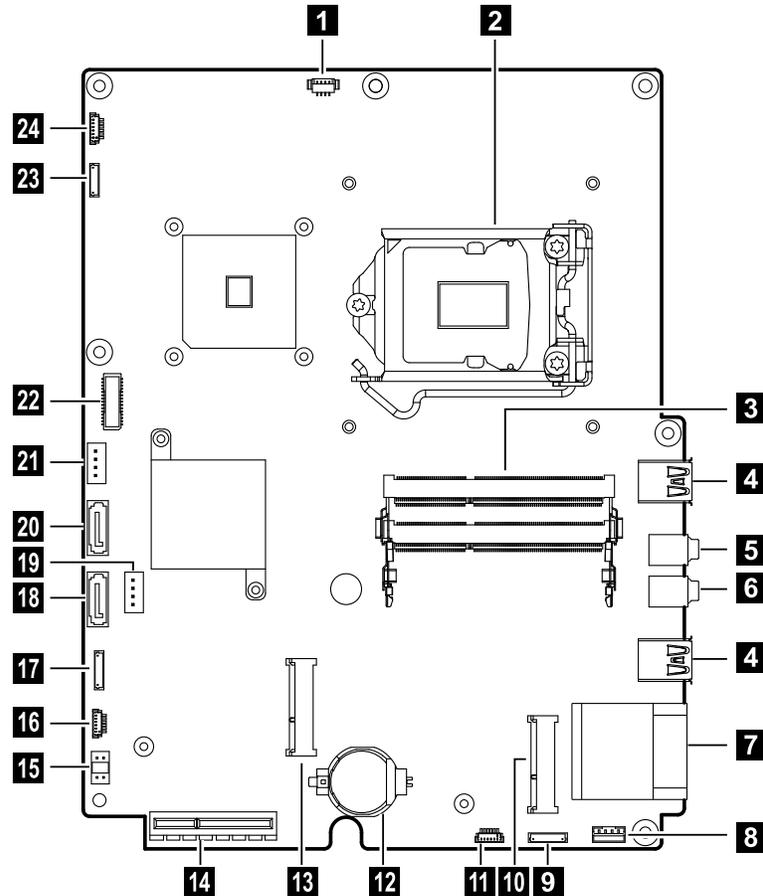

|                                   |                                     |
|-----------------------------------|-------------------------------------|
| 1. Thermal sensor header          | 13. TV-Tuner card connector         |
| 2. CPU and socket                 | 14. Rear I/O module connector       |
| 3. Memory connector               | 15. DC-in connector                 |
| 4. USB connectors                 | 16. B-Case card connector           |
| 5. Headphone connector            | 17. Converter board connector       |
| 6. Microphone connector           | 18. Hard disk drive SATA connector  |
| 7. Memory card connector          | 19. Hard disk drive power connector |
| 8. Speaker connector              | 20. Optical drive SATA connector    |
| 9. Power switch board connector   | 21. Optical driver power connector  |
| 10. Wi-Fi card connector          | 22. LVDS connector                  |
| 11. Front control board connector | 23. Camera connector                |
| 12. Battery                       | 24. System fan connector            |



---

## Chapter 8. Replacing hardware

**Attention:** Do not remove the computer cover or attempt any repair before reading the “Important safety information” in the Safety and Warranty Guide that was included with your computer. To obtain copies of the Safety and Warranty Guide, go to the Support Web site at: <http://consumersupport.lenovo.com>.

**Note:** Use only parts provided by Lenovo.

---

### General information

#### Pre-disassembly instructions

Before starting the disassembly procedure, make sure that you do the following:

1. Turn off the power to the system and all peripherals.
2. Unplug all power and signal cables from the computer.
3. Place the system on a flat, stable surface.


---

## Replacing the keyboard and mouse

**Note:** Your keyboard will be connected to a USB connector at either side or at the rear of the computer.

### To replace the keyboard:

- Step 1. Remove any media (disks, CDs, or memory cards) from the drives, shut down the computer, and turn off all attached devices.
- Step 2. Unplug all power cords from electrical outlets.
- Step 3. Locate the connector for the keyboard. Refer to “Side view of the computer” and “Rear view of the computer”.

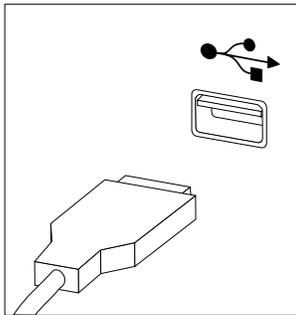

- Step 4. Disconnect the defective keyboard cable from the computer and connect the new keyboard cable to the same connector.
- Step 5. The mouse can be replaced using the same method.


---

## Replacing the adapter


**Attention:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

- Step 1. Remove any media (disks, CDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.

Step 2. Disconnect the adapter cable from the computer **1**, then unplug the power cord from electrical outlet. **2**

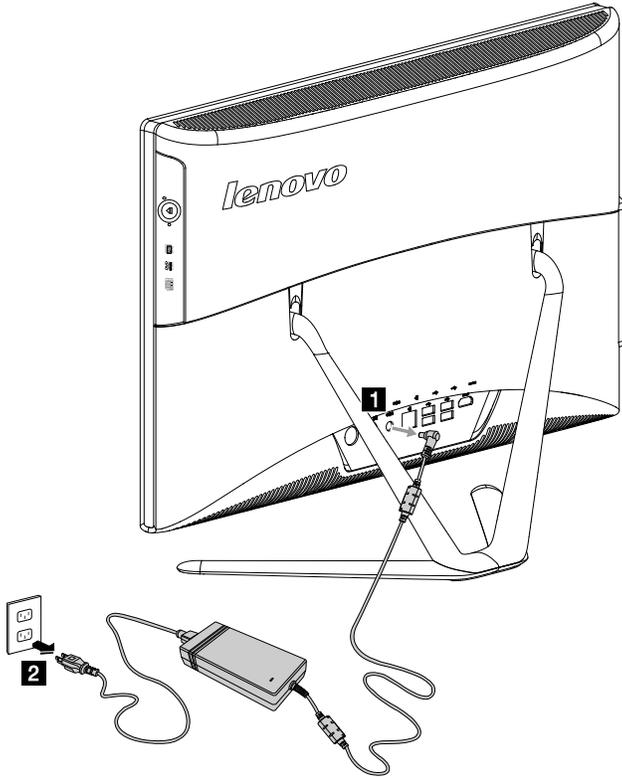

Step 3. Connect the new adapter as shown. **1 2**

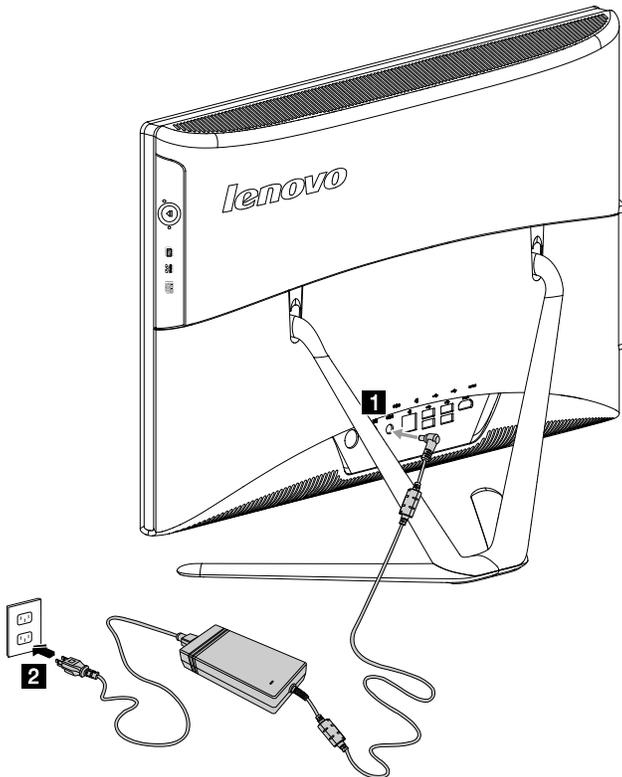


---

## Removing the stand base

**Attention:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the touch screen from scratches or other damage.

- Step 1. Remove any media (disks, CDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Step 2. Unplug all power cords from electrical outlets.
- Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right views” and “Rear view” for help with locating the various connectors.
- Step 4. Twist the hand screw ring counter-clockwise until the base comes loose to release the stand base from the stand holder. **1**
- Step 5. Slide the stand base out from the holder then put it aside. **2**

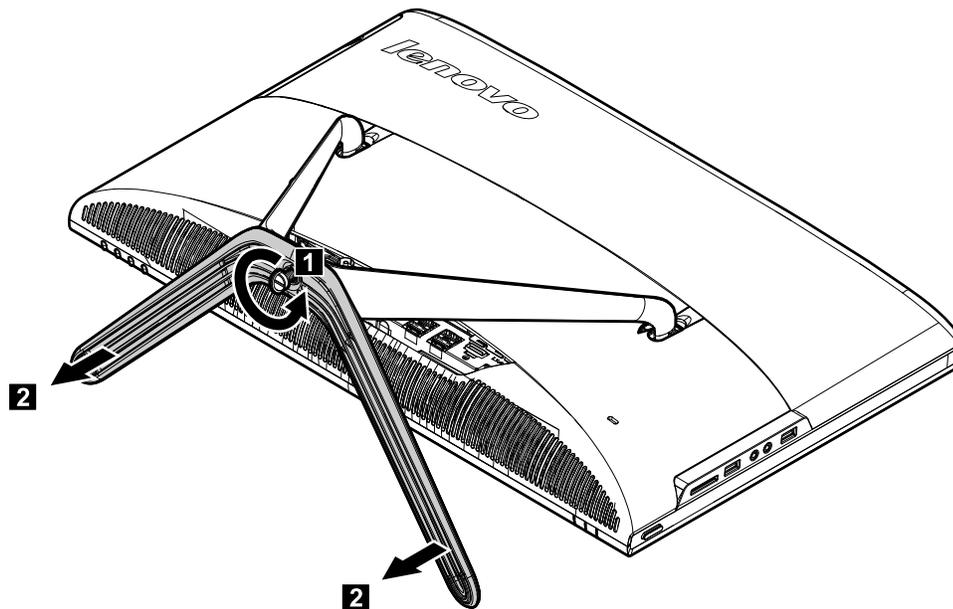

- Step 6. Refer to “Installing the computer stand” to reinstall the stand base.


---

## Removing the foot cover

**Attention:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the touch screen from scratches or other damage.

- Step 1. Remove any media (disks, CDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Step 2. Unplug all power cords from electrical outlets.
- Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right views” and “Rear view” for help with locating the various connectors.
- Step 4. Remove the foot base. Refer to “Removing the foot base”.
- Step 5. Lift up the stand holder then slide out the foot cover as shown.

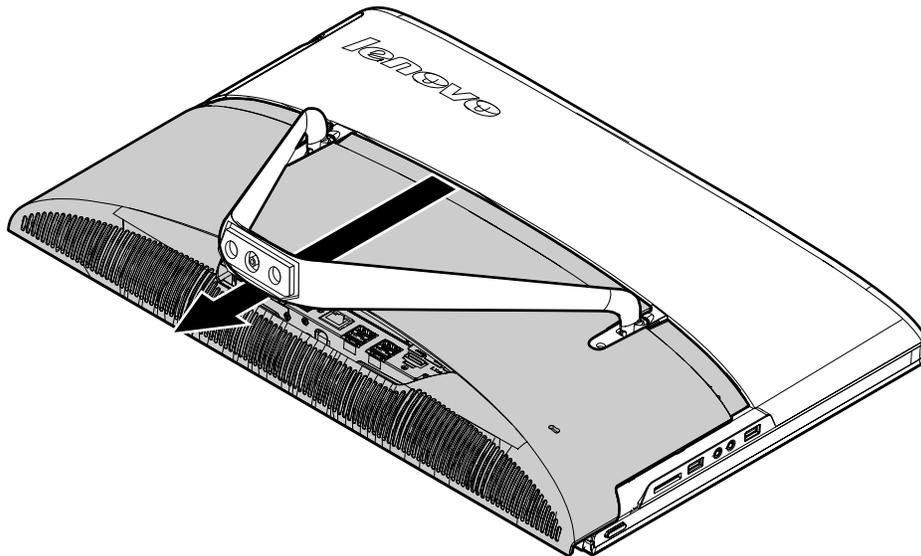

- Step 6. To reattach the foot cover:
  - a. Lift up the stand holder.
  - b. Line up the foot cover with mounting holes on the back of the computer, then slide it back into position.


---

## Replacing a memory module

**Attention:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the touch screen from scratches or other damage.

- Step 1. Remove any media (disks, CDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Step 2. Unplug all power cords from electrical outlets.
- Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right views” and “Rear view” for help with locating the various connectors.
- Step 4. Remove the stand base. Refer to “Removing the stand base”.
- Step 5. Remove the foot cover. Refer to “Removing the foot cover”.
- Step 6. Push out the latches on both sides of the memory socket to release the memory module **1** and gently pull the memory module upward to remove it from its socket. **2** All of the memory modules can be removed using the same procedure.

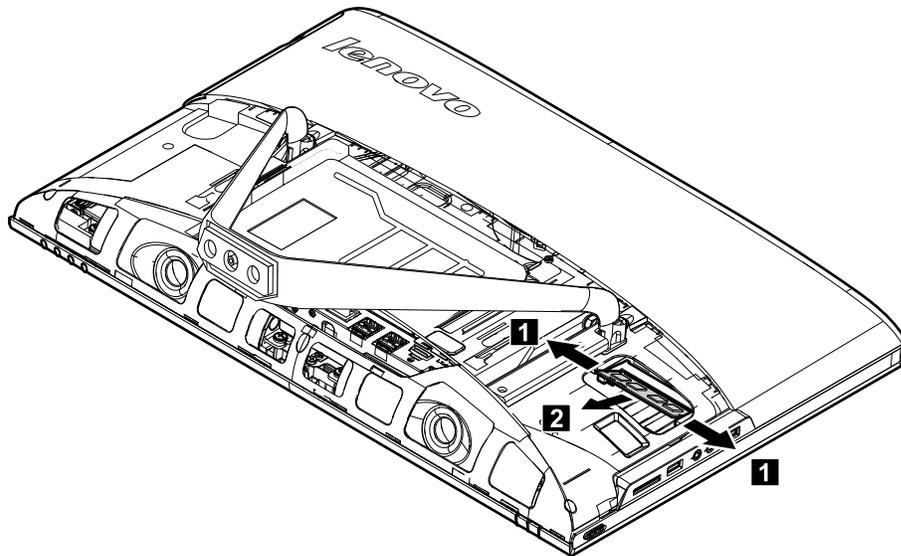

- Step 7. To install a memory module:
  - a. Align the new memory module with the memory socket, then insert it and push down on the top edge. Make sure the latches lock the memory module in place.
- Step 8. Reattach the foot cover and stand base.


---

## Replacing the hard disk drive


**Attention:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the touch screen from scratches or other damage.

- Step 1. Remove any media (disks, CDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Step 2. Unplug all power cords from electrical outlets.
- Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right views” and “Rear view” for help with locating the various connectors.
- Step 4. Remove the stand base. Refer to “Removing the stand base”.
- Step 5. Remove the foot cover. Refer to “Removing the foot cover”.
- Step 6. Push the hard disk drive bracket **1**, then slide the hard disk drive and bracket out of the chassis as shown. **2**

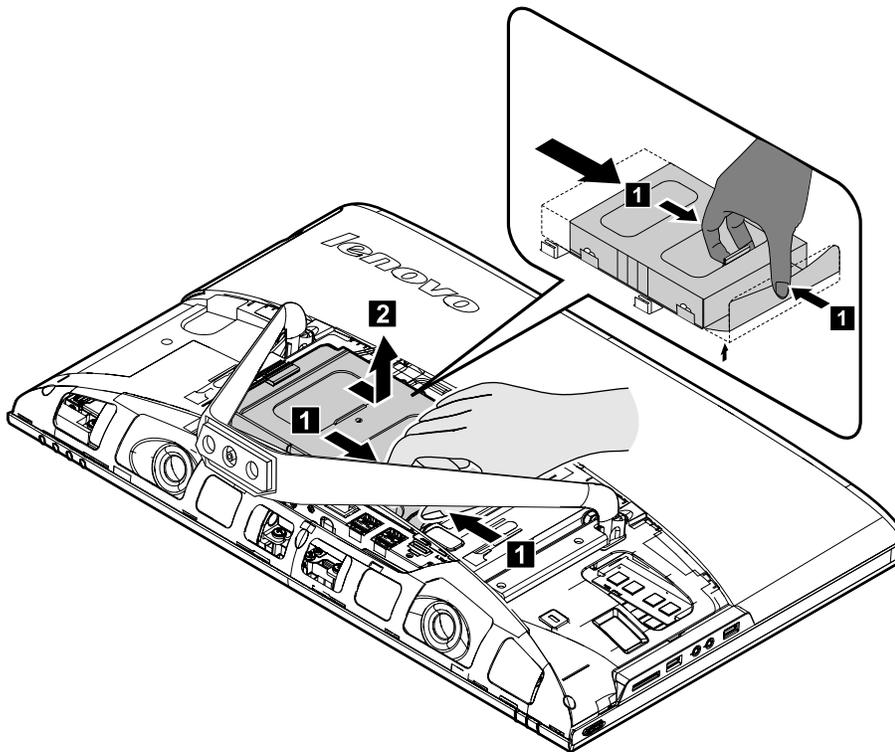

Step 7. Push the lock pins outward to release the hard disk drive from the bracket.

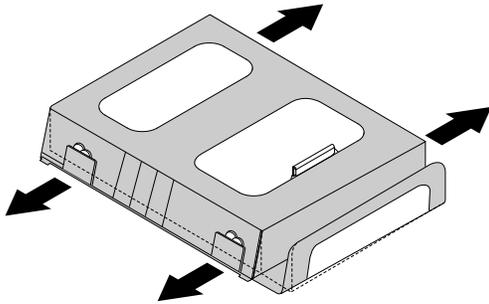

Step 8. To install the new hard disk drive:

- a. Line up the new hard disk drive with the bracket and secure it with the pins.
- b. Slide the hard disk drive and bracket back into position.

Step 9. Reattach the foot cover and stand base.

---

## Replacing the optical drive

**Attention:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the touch screen from scratches or other damage.

Step 1. Remove any media (disks, CDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.


Step 2. Unplug all power cords from electrical outlets.

Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right views” and “Rear view” for help with locating the various connectors.


Step 4. Remove the stand base. Refer to “Removing the stand base”.

Step 5. Remove the foot cover. Refer to “Removing the foot cover”.

Step 6. Push the optical drive pin downward to push out the optical drive as shown. **1 2**

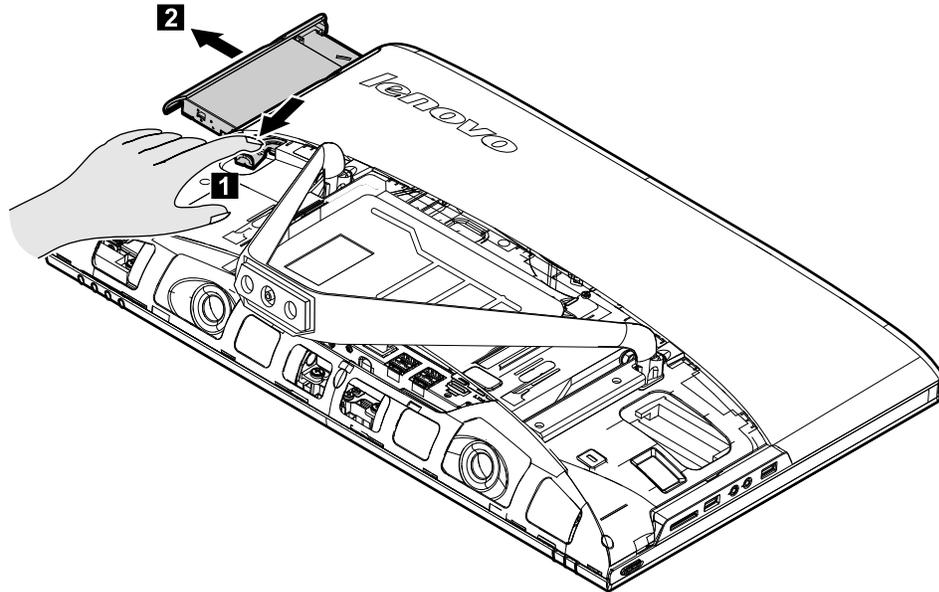


Step 7. Push a small iron stick (paper clip) into the small hole on the optical drive cover so that the disk springs out as shown.

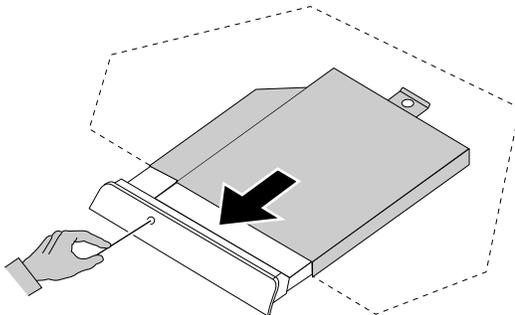

Step 8. Remove the 2 screws that secure the optical drive to the metal bracket. **1**

Step 9. Use a small flat head screwdriver to press and push out the pins that secure the cover to the disk. **2 3**

Step 10. Separate the cover from the defective optical drive.

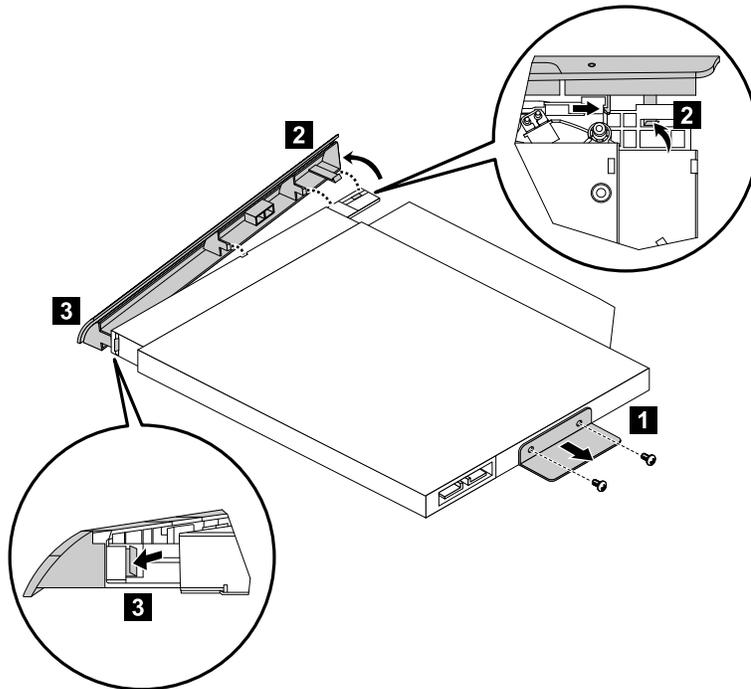

Step 11. To install the new optical drive:

- a. Align the new optical drive with the cover, and then push the cover back into position.
- b. Screw the metal bracket back onto the new optical drive.
- c. Slide the new optical drive into the drive bay.

Step 12. Reattach the foot cover and stand base.

---


## Removing the stand holder

**Note:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the computer screen from scratches or other damage.

### To remove the stand holder:

- Step 1. Remove any media (disks, CDs, DVDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Step 2. Unplug all power cords from electrical outlets.
- Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right view” and “Rear view” for help with locating the various connectors.
- Step 4. Remove the stand base. Refer to “Removing the stand base”.
- Step 5. Remove the foot cover. Refer to “Removing the foot cover”.
- Step 6. Remove the four screws that secure the stand holder to the chassis, then lift up the stand holder to remove it.

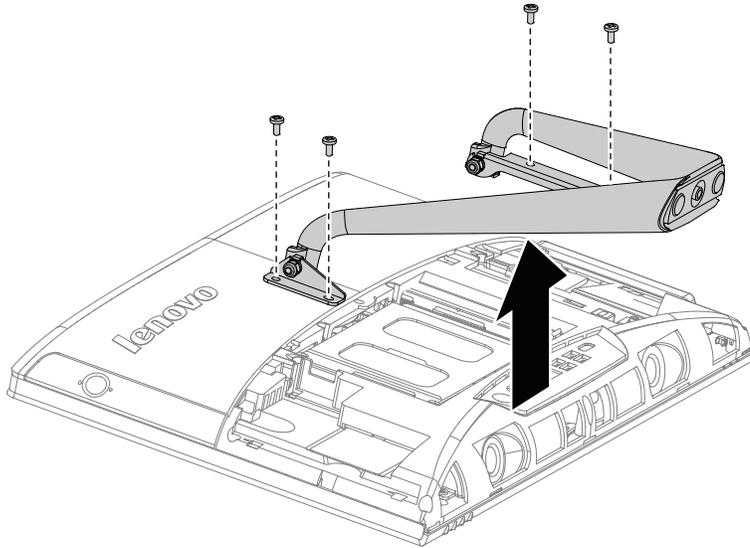

- Step 7. To reattach the stand holder:
- Align the holes on the stand holder with mounting holes on the chassis, place the stand holder back into position.
  - Secure the stand holder to the chassis with the four screws.
- Step 8. Line up the foot cover with mounting holes on the back of the computer, then slide it back into position.
- Step 9. Reattach the stand base.

---


## Removing the middle cover

**Note:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the computer screen from scratches or other damage.

### To remove the middle cover:

- Remove any media (disks, CDs, DVDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Unplug all power cords from electrical outlets.
- Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right view” and “Rear view” for help with locating the various connectors.
- Remove the stand base. Refer to “Removing the stand base”.
- Remove the foot cover. Refer to “Removing the foot cover”.
- Remove the optical drive. Refer to “Replacing the optical drive”.
- Remove the stand holder. Refer to “Removing the stand holder”.
- Remove the seven screws that secure the middle cover to the chassis, then lift up the middle cover from the left side (optical drive side) to remove the middle cover.

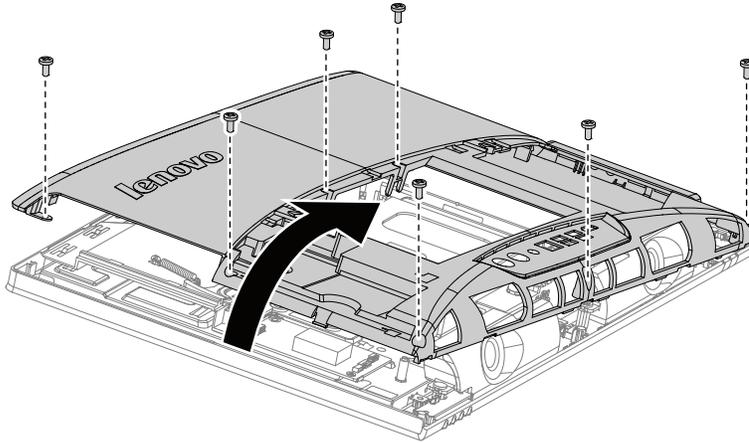

Step 9. To reattach the middle cover:

- a. Line up the middle cover with chassis, then place the middle cover back.
- b. Secure the middle cover to the chassis with the seven screws.

Step 10. Reattach the stand holder, optical drive, foot cover and stand base.

---

## Replacing the converter board


**Note:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the computer screen from scratches or other damage.

### To replace the converter board:

- Step 1. Remove any media (disks, CDs, DVDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Step 2. Unplug all power cords from electrical outlets.
- Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right view” and “Rear view” for help with locating the various connectors.
- Step 4. Remove the stand base. Refer to “Removing the stand base”.
- Step 5. Remove the foot cover. Refer to “Removing the foot cover”.
- Step 6. Remove the optical drive. Refer to “Replacing the optical drive”.
- Step 7. Remove the stand holder. Refer to “Removing the stand holder”.
- Step 8. Remove the middle cover. Refer to “Removing the middle cover”.

- Step 9. Disconnect the two cables from the converter **1**, and then remove the screw that secures the converter board to the chassis. **2**
- Step 10. Lift up then slide out the converter board to remove it. **3**

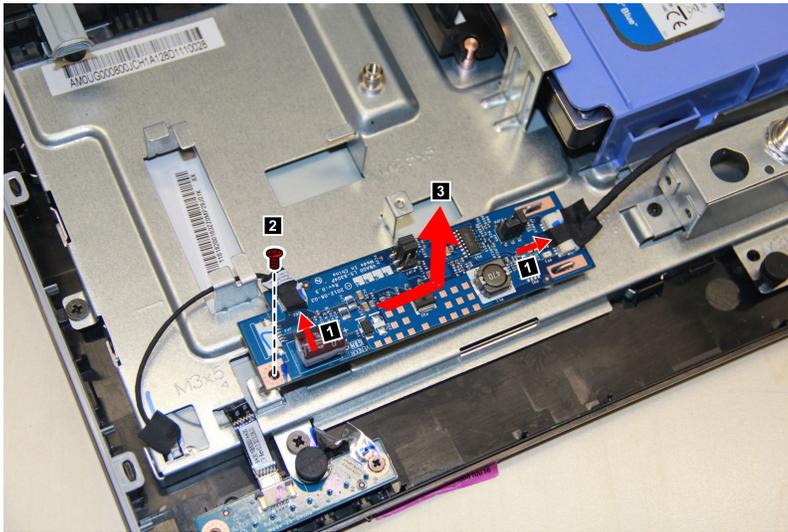

- Step 11. To install the new converter board:
- Line up the holes on the new converter board with the mounting holes on the chassis and secure it with the screw.
  - Connect the two cables to the new converter board.
- Step 12. Reattach the middle cover, optical drive, stand holder, foot cover and stand base.

---

## Removing the EMI cover



**Note:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the computer screen from scratches or other damage.

### To replace the EMI cover

- Step 1. Remove any media (disks, CDs, DVDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Step 2. Unplug all power cords from electrical outlets.
- Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right view” and “Rear view” for help with locating the various connectors.
- Step 4. Remove the stand base. Refer to “Removing the stand base”.
- Step 5. Remove the foot cover. Refer to “Removing the foot cover”.
- Step 6. Remove the optical drive. Refer to “Replacing the optical drive”.
- Step 7. Remove the stand holder. Refer to “Removing the stand holder”.
- Step 8. Remove the middle cover. Refer to “Removing the middle cover”.

Step 9. Remove the seven screws that secure the EMI cover to the chassis, and then lift it up.

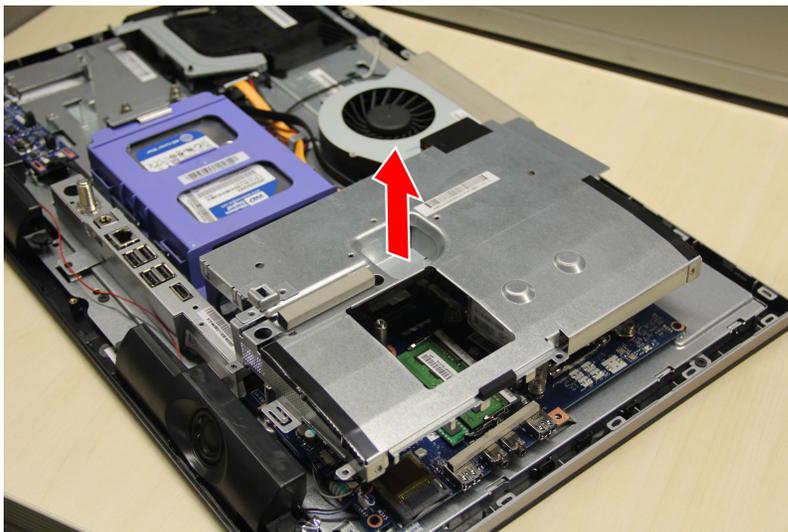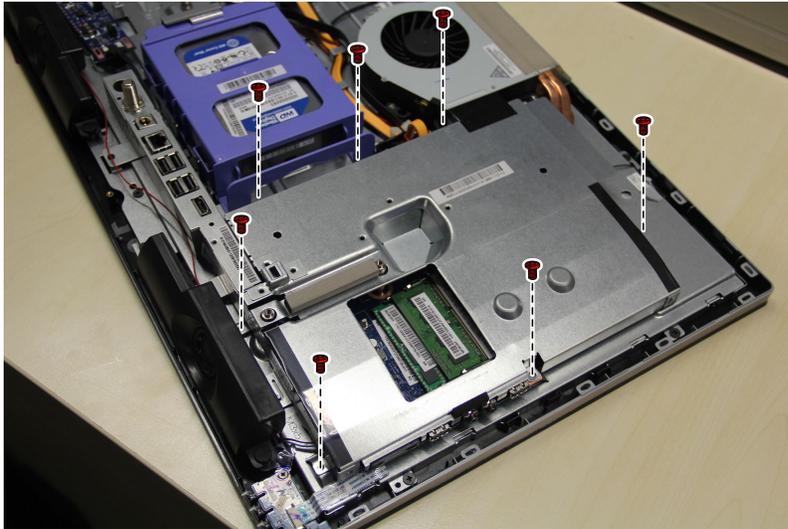

Step 10. To reattach the EMI cover:

- a. Line up the holes on the EMI cover with mounting holes on the chassis, then place EMI cover back into position.
- b. Secure the EMI cover to the chassis with seven screws.

Step 11. Reattach the middle cover, optical drive, stand holder, foot cover and stand base.

---


## Replacing the rear I/O module

**Note:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the computer screen from scratches or other damage.

**To replace the rear I/O module**

- Step 1. Remove any media (disks, CDs, DVDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Step 2. Unplug all power cords from electrical outlets.
- Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right view” and “Rear view” for help with locating the various connectors.
- Step 4. Remove the stand base. Refer to “Removing the stand base”.
- Step 5. Remove the foot cover. Refer to “Removing the foot cover”.
- Step 6. Remove the optical drive. Refer to “Replacing the optical drive”.
- Step 7. Remove the stand holder. Refer to “Removing the stand holder”.
- Step 8. Remove the middle cover. Refer to “Removing the middle cover”.
- Step 9. Remove the EMI cover. Refer to “Removing the EMI cover”.
- Step 10. Remove the three screws that secure the rear I/O module to the motherboard and lift it up gently.
- Step 11. Disconnect the power cable from the motherboard and the TV antenna cable(s) from the TV tuner card.

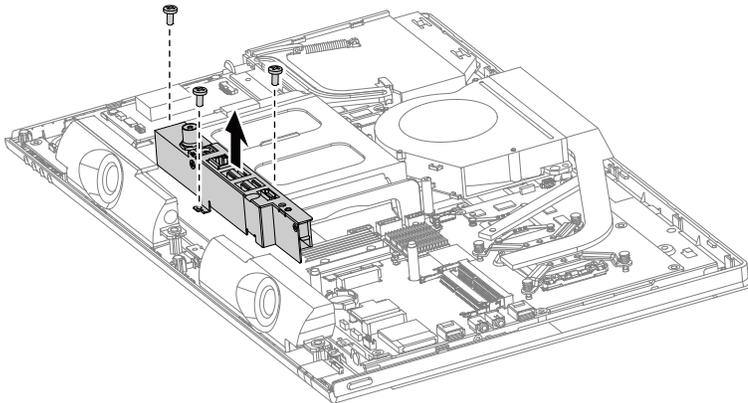

- Step 12. Remove the hexagonal nut that secures the TV-Tuner antenna connector to the rear I/O bracket. Then slide the TV-Tuner antenna connector out.
- Step 13. Remove the one screw that secures the power jack to the bracket. Slide out the power jack from the rear I/O bracket.
- Step 14. To install the new rear I/O module:
  - a. Attach the TV-Tuner antenna connector and power jack to the new rear I/O bracket, then secure them with the screw and nut.
  - b. Line up the rear I/O module with the connectors on the motherboard, then insert the rear I/O module into place.
  - c. Connect the power cable to the motherboard and the TV antenna cable(s) to the TV tuner card.
  - d. Secure the rear I/O module with the three screws.
- Step 15. Reattach the EMI cover, middle cover, optical drive, stand holder, foot cover and stand base.

---


## Replacing the TV tuner card

**Note:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the computer screen from scratches or other damage.

## To replace the TV tuner card

- Step 1. Remove any media (disks, CDs, DVDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Step 2. Unplug all power cords from electrical outlets.
- Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right view” and “Rear view” for help with locating the various connectors.
- Step 4. Remove the stand base. Refer to “Removing the stand base”.
- Step 5. Remove the foot cover. Refer to “Removing the foot cover”.
- Step 6. Remove the optical drive. Refer to “Replacing the optical drive”.
- Step 7. Remove the stand holder. Refer to “Removing the stand holder”.
- Step 8. Remove the middle cover. Refer to “Removing the middle cover”.
- Step 9. Remove the EMI cover. Refer to “Removing the EMI cover”.
- Step 10. Disconnect the antenna cable from the TV-Tuner card.
- Step 11. Remove the screw that secures the TV-Tuner card to the motherboard.
- Step 12. Pull the TV-Tuner card upward to remove it from the card port on the motherboard.

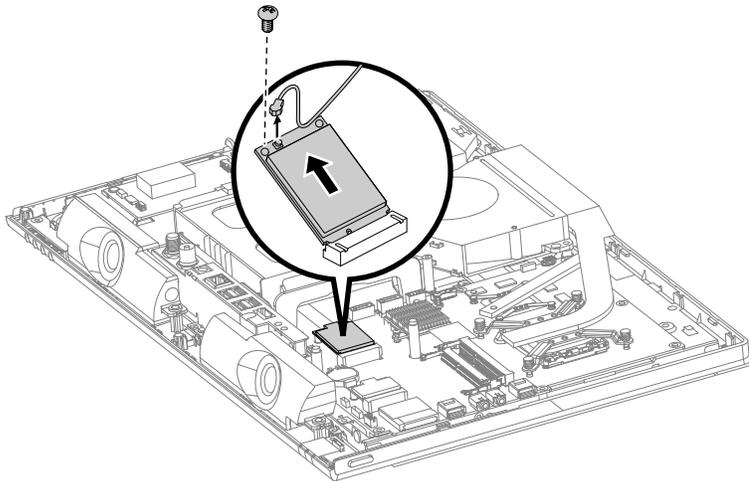

- Step 13. To install the new TV-Tuner card:
  - a. Insert the notched end of the TV-Tuner card into the card port on the motherboard.
  - b. Secure new the TV-Tuner card to the motherboard with the screw.
  - c. Connect the antenna cable to the new TV-Tuner card.
- Step 14. Reattach the EMI cover, middle cover, optical drive, stand holder, foot cover and stand base.

---


## Replacing the WLAN card

**Note:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the computer screen from scratches or other damage.

### To replace the WLAN card:

- Step 1. Remove any media (disks, CDs, DVDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Step 2. Unplug all power cords from electrical outlets.
- Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right view” and “Rear view” for help with locating the various connectors.
- Step 4. Remove the stand base. Refer to “Removing the stand base”.
- Step 5. Remove the foot cover. Refer to “Removing the foot cover”.
- Step 6. Remove the optical drive. Refer to “Replacing the optical drive”.
- Step 7. Remove the stand holder. Refer to “Removing the stand holder”.
- Step 8. Remove the middle cover. Refer to “Removing the middle cover”.
- Step 9. Remove the EMI cover. Refer to “Removing the EMI cover”.
- Step 10. Disconnect the antenna cables from the WLAN card.
- Step 11. Remove the screw that secures the WLAN card to the motherboard.
- Step 12. Lift up the WLAN card to remove it from the socket.

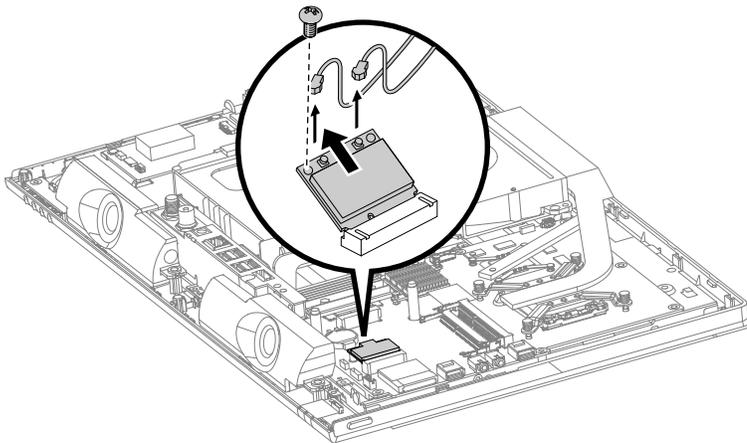

- Step 13. To install the new WLAN card:
  - a. Insert the notched end of the WLAN card into the card port on the motherboard.
  - b. Secure new the WLAN card to the motherboard with the screw.
  - c. Connect the antenna cables to the new WLAN card.
- Step 14. Reattach the EMI cover, middle cover, optical drive, stand holder, foot cover and stand base.

---

## Replacing the speaker system


**Note:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the computer screen from scratches or other damage.

### To replace the speaker system:

- Step 1. Remove any media (disks, CDs, DVDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Step 2. Unplug all power cords from electrical outlets.

- Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right view” and “Rear view” for help with locating the various connectors.
- Step 4. Remove the stand base. Refer to “Removing the stand base”.
- Step 5. Remove the foot cover. Refer to “Removing the foot cover”.
- Step 6. Remove the optical drive. Refer to “Replacing the optical drive”.
- Step 7. Remove the stand holder. Refer to “Removing the stand holder”.
- Step 8. Remove the middle cover. Refer to “Removing the middle cover”.
- Step 9. Remove the EMI cover. Refer to “Removing the EMI cover”.
- Step 10. Disconnect the speaker cables from the connector on the motherboard. **1**
- Step 11. Remove the four rubber screws that secure the speaker system to the chassis **2**, then lift up the speaker system to remove it. **3**

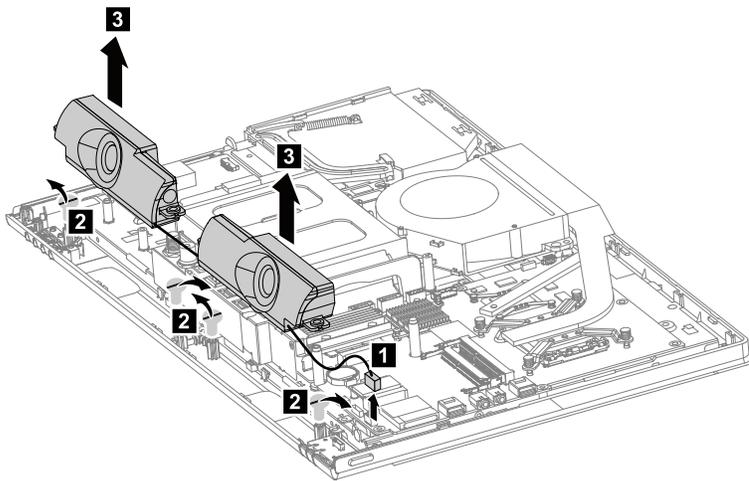

- Step 12. To install the new speaker system:
  - a. Place the new speaker system into position, then secure it with the rubber screws.
  - b. Connect the new speaker cables to the connector on the motherboard.
- Step 13. Reattach the EMI cover, middle cover, optical drive, stand holder, foot cover and stand base.

---

## Replacing the system fan


**Note:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the computer screen from scratches or other damage.

### To replace the system fan

- Step 1. Remove any media (disks, CDs, DVDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Step 2. Unplug all power cords from electrical outlets.
- Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right view” and “Rear view” for help with locating the various connectors.
- Step 4. Remove the stand base. Refer to “Removing the stand base”.

- Step 5. Remove the foot cover. Refer to “Removing the foot cover”.
- Step 6. Remove the optical drive. Refer to “Replacing the optical drive”.
- Step 7. Remove the stand holder. Refer to “Removing the stand holder”.
- Step 8. Remove the middle cover. Refer to “Removing the middle cover”.
- Step 9. Remove the EMI cover. Refer to “Removing the EMI cover”.
- Step 10. Remove the sealing tape between the system fan and heat-sink.
- Step 11. Remove the three screws that secure the system fan to the chassis.
- Step 12. Disconnect the power cable from the motherboard.
- Step 13. Lift up the system fan to remove it.

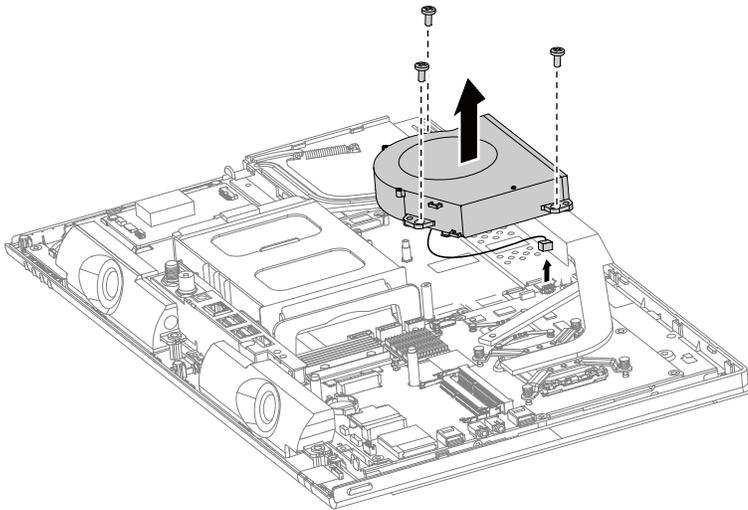

- Step 14. To install the new system fan:
  - a. Place the new system fan into position, and then secure it to the chassis with the three screws.
  - b. Connect the system fan power cable to the connector on the motherboard.
  - c. Use the sealing tape to seal the gap in-between the system fan and heat-sink.
- Step 15. Reattach the EMI cover, middle cover, optical drive, stand holder, foot cover and stand base.

---

## Replacing the heat-sink


**Note:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the computer screen from scratches or other damage.

### To replace the heat-sink:

- Step 1. Remove any media (disks, CDs, DVDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Step 2. Unplug all power cords from electrical outlets.
- Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right view” and “Rear view” for help with locating the various connectors.
- Step 4. Remove the stand base. Refer to “Removing the stand base”.

- Step 5. Remove the foot cover. Refer to “Removing the foot cover”.
- Step 6. Remove the optical drive. Refer to “Replacing the optical drive”.
- Step 7. Remove the stand holder. Refer to “Removing the stand holder”.
- Step 8. Remove the middle cover. Refer to “Removing the middle cover”.
- Step 9. Remove the EMI cover. Refer to “Removing the EMI cover”.
- Step 10. Remove the sealing tape between the system fan and heat-sink.
- Step 11. Remove the eight screws that secure the heat-sink to the motherboard and chassis.
- Step 12. Remove the heat-sink by lifting it up.

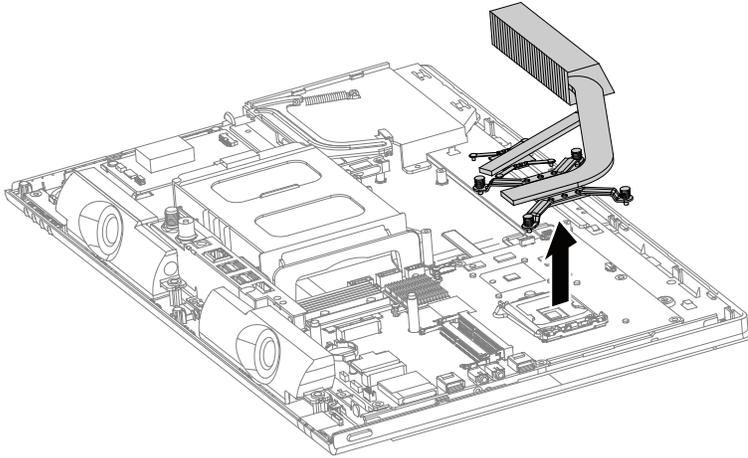

**Attention:** Place the heat-sink upside down on a flat surface to prevent thermal grease from contaminating other components.

**Attention:** Use an alcohol pad to wipe the thermal grease off the CPU.

- Step 13. To install the new heat-sink:
  - a. Line up the new heat-sink with mounting holes on the motherboard, then place it into position.
  - b. Follow the numbers printed on the new heat-sink to secure it in order using the eight screws.
  - c. Use the sealing tape to seal the gap in-between the system fan and heat-sink.
- Step 14. Reattach the EMI cover, middle cover, optical drive, stand holder, foot cover and stand base.

---

## Replacing the camera


**Note:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the computer screen from scratches or other damage.

### To replace the camera:

- Step 1. Remove any media (disks, CDs, DVDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Step 2. Unplug all power cords from electrical outlets.

- Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right view” and “Rear view” for help with locating the various connectors.
- Step 4. Remove the stand base. Refer to “Removing the stand base”.
- Step 5. Remove the foot cover. Refer to “Removing the foot cover”.
- Step 6. Remove the optical drive. Refer to “Replacing the optical drive”.
- Step 7. Remove the stand holder. Refer to “Removing the stand holder”.
- Step 8. Remove the middle cover. Refer to “Removing the middle cover”.
- Step 9. Remove the EMI cover. Refer to “Removing the EMI cover”.
- Step 10. Remove the heat-sink. Refer to “Replacing the heat sink”.
- Step 11. Remove the screw that secures camera to the front bezel.
- Step 12. Lift up the camera and disconnect the data cable from the camera.

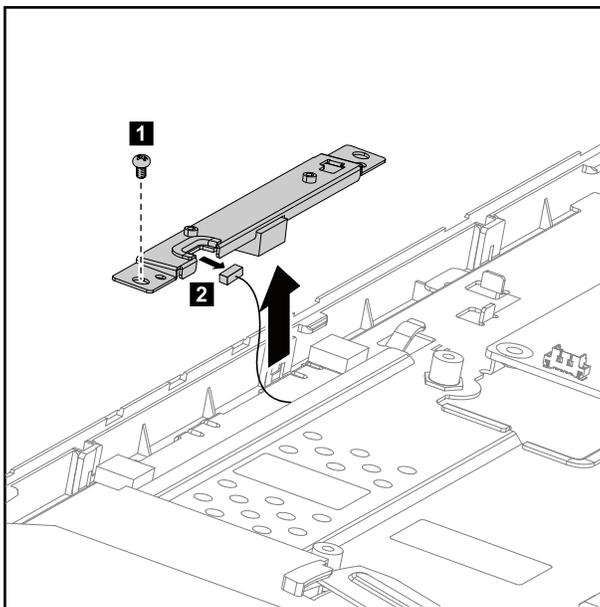

Step 13. Remove the two screws that secure the camera to the bracket, then put aside the bracket.

Step 14. To install the new camera:

- a. Line up the new camera with the bracket, then secure the camera to the bracket with the two screws.
- b. Connect the data cable to the new camera.
- c. Line up the holes in the new camera with the mounting holes on the front bezel and secure it with the screw.

Step 15. Reattach the heat-sink, EMI cover, middle cover, optical drive, stand holder, foot cover and stand base.

---


## Replacing the CPU

**Note:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the computer screen from scratches or other damage.

## To replace the CPU


- Step 1. Remove any media (disks, CDs, DVDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Step 2. Unplug all power cords from electrical outlets.
- Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right view” and “Rear view” for help with locating the various connectors.
- Step 4. Remove the stand base. Refer to “Removing the stand base”.
- Step 5. Remove the foot cover. Refer to “Removing the foot cover”.
- Step 6. Remove the optical drive. Refer to “Replacing the optical drive”.
- Step 7. Remove the stand holder. Refer to “Removing the stand holder”.
- Step 8. Remove the middle cover. Refer to “Removing the middle cover”.
- Step 9. Remove the EMI cover. Refer to “Removing the EMI cover”.
- Step 10. Remove the heat-sink. Refer to “Replacing the heat sink”.
- Step 11. Lift the small handle and open the retainer.
- Step 12. Lift the microprocessor straight up and out of the socket. **3**

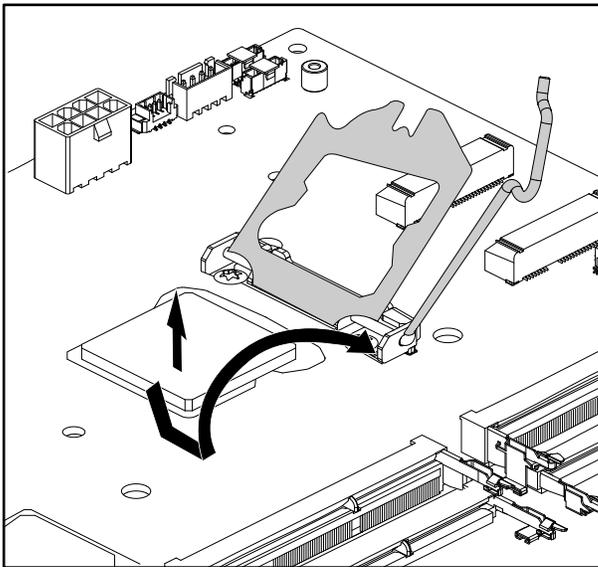

**Attention:** Do not touch the gold contacts on the bottom of the microprocessor. When handling the microprocessor, touch only the sides.

**Note:** Do not drop anything onto the microprocessor socket while it is exposed. The socket pins must be kept as clean as possible.


Step 13. Holding the sides of the microprocessor with your fingers, remove the protective cover **1** that protects the gold contacts on the new microprocessor. **2**

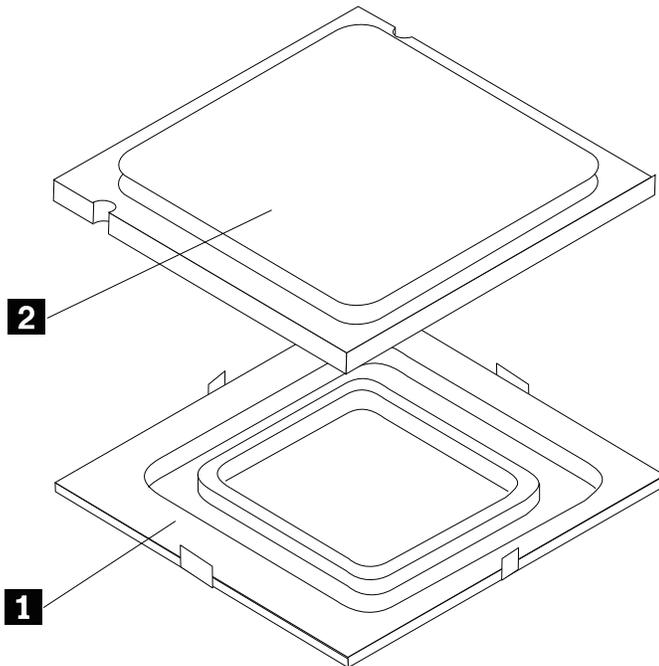

Step 14. Holding the sides of the microprocessor with your fingers, position the microprocessor so that the notches on the microprocessor are aligned with the tabs in the microprocessor socket.

**Important:** To avoid damaging the microprocessor contacts, keep the microprocessor completely level while installing it into the socket.

Step 15. Lower the microprocessor straight down into its socket on the motherboard.

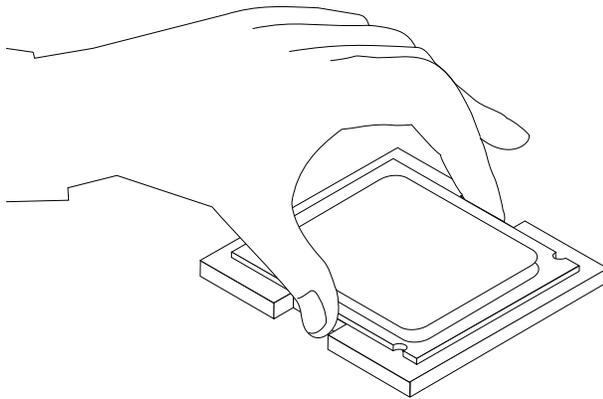

Step 16. To secure the microprocessor in the socket, close the microprocessor retainer and lock it into position with the small handle.

Step 17. Use a thermal grease syringe to place 5 drops of grease on the top of the microprocessor. Each drop of grease should be 0.03ml (3 tick marks on the grease syringe).

Step 18. Reattach the heat-sink, EMI cover, middle cover, optical drive, stand holder, foot cover and stand base.

---


## Replacing the front control board

**Note:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the computer screen from scratches or other damage.

### To replace the front control board:

- Step 1. Remove any media (disks, CDs, DVDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Step 2. Unplug all power cords from electrical outlets.
- Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right view” and “Rear view” for help with locating the various connectors.
- Step 4. Remove the stand base. Refer to “Removing the stand base”.
- Step 5. Remove the foot cover. Refer to “Removing the foot cover”.
- Step 6. Remove the optical drive. Refer to “Replacing the optical drive”.
- Step 7. Remove the stand holder. Refer to “Removing the stand holder”.
- Step 8. Remove the middle cover. Refer to “Removing the middle cover”.
- Step 9. Remove the EMI cover. Refer to “Removing the EMI cover”.
- Step 10. Remove the speaker system. Refer to “Replacing the speaker system”.
- Step 11. Remove the screw that secures the front control board to the front bezel,
- Step 12. Disconnect the data cable from the front control board, then lift up the front control board.

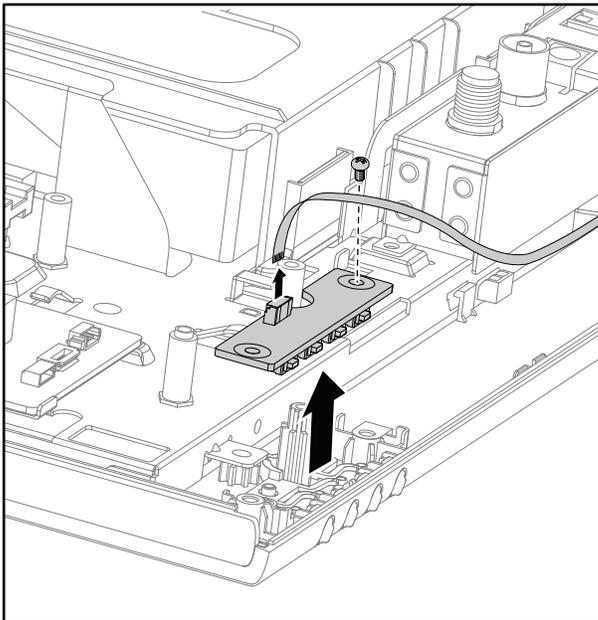

- Step 13. To install the new front control board:
  - a. Connect the data cable to the new front control board.
  - b. Line up the new front control board with the front bezel, then place it into position.
  - c. Secure the front control board with the screw.

Step 14. Reattach the speaker system, EMI cover, middle cover, optical drive, stand holder, foot cover and stand base.

---


## Replacing the power switch board

**Note:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the computer screen from scratches or other damage.

### To replace the power switch board

- Step 1. Remove any media (disks, CDs, DVDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Step 2. Unplug all power cords from electrical outlets.
- Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right view” and “Rear view” for help with locating the various connectors.
- Step 4. Remove the stand base. Refer to “Removing the stand base”.
- Step 5. Remove the foot cover. Refer to “Removing the foot cover”.
- Step 6. Remove the optical drive. Refer to “Replacing the optical drive”.
- Step 7. Remove the stand holder. Refer to “Removing the stand holder”.
- Step 8. Remove the middle cover. Refer to “Removing the middle cover”.
- Step 9. Remove the EMI cover. Refer to “Removing the EMI cover”.
- Step 10. Remove the screw that secure the power switch board to the front bezel.
- Step 11. Disconnect the data cable from the power switch board, then lift up the power switch board.

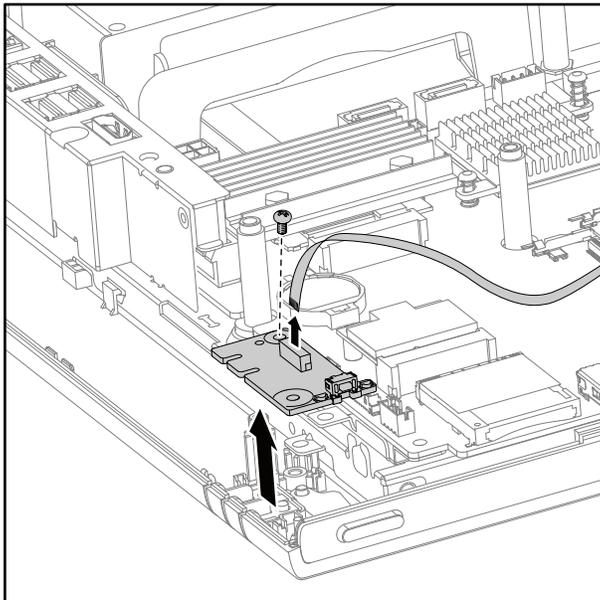

- Step 12. To install the power switch board:
- a. Line up the hole on the new power switch board with the mounting hole on the front bezel, then place it into position.
  - b. Secure the power switch board with the screw.

- c. Connect the power cable to the new power switch board.

Step 13. Reattach the EMI cover, middle cover, optical drive, stand holder, foot cover and stand base.

---

## Replacing the motherboard


**Note:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the computer screen from scratches or other damage.

### To replace the motherboard:

- Step 1. Remove any media (disks, CDs, DVDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Step 2. Unplug all power cords from electrical outlets.
- Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right view” and “Rear view” for help with locating the various connectors.
- Step 4. Remove the stand base. Refer to “Removing the stand base”.
- Step 5. Remove the foot cover. Refer to “Removing the foot cover”.
- Step 6. Remove the memory modules. Refer to “Replacing a memory module”.
- Step 7. Remove the optical drive. Refer to “Replacing the optical drive”.
- Step 8. Remove the stand holder. Refer to “Removing the stand holder”.
- Step 9. Remove the middle cover. Refer to “Removing the middle cover”.
- Step 10. Remove the EMI cover. Refer to “Removing the EMI cover”.
- Step 11. Remove the rear I/O module. Refer to “Replacing the rear I/O module”.
- Step 12. Remove the heat-sink. Refer to “Replacing the heat-sink”.
- Step 13. Remove the CPU. Refer to “Replacing the CPU”.
- Step 14. Remove the TV-Tuner card. Refer to “Replacing the TV tuner card”.
- Step 15. Remove the WLAN card. Refer to “Replacing the WLAN card”.
- Step 16. Unplug the following cables from connectors on the motherboard:
  - Power switch board cable
  - Speaker system cable
  - Front control board cable
  - Converter cable
  - Camera cable
  - System fan power cable
  - Hard disk drive power cable
  - Hard disk drive SATA cable (Black)
  - Optical drive SATA cable (Red)
  - Optical disk drive power cable
  - LVDS cable

Step 17. Remove the five screws that secure the motherboard to the chassis and lift the motherboard up to remove it.

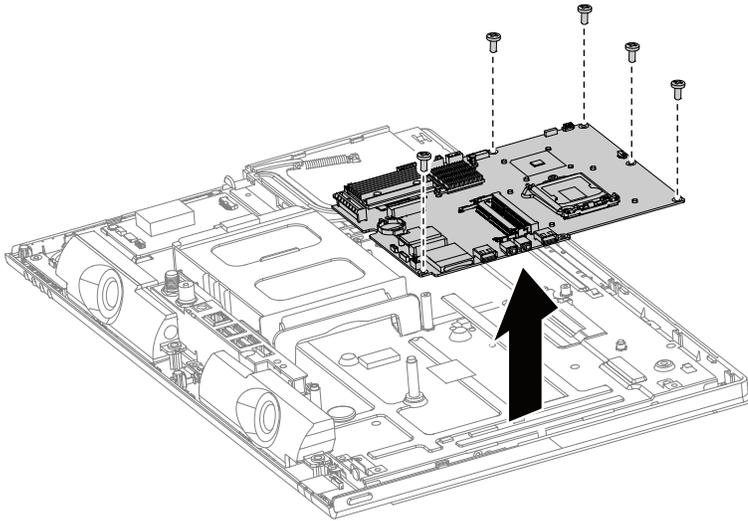

Step 18. To install the new motherboard:

- a. Line up the holes on the new motherboard with the mounting holes chassis and place the new motherboard into position.
- b. Use the screws to secure the new motherboard to the chassis.

Step 19. Install the following parts to the new motherboard:

- WLAN card
- TV-Tuner card
- CPU
- Heat-sink
- Rear I/O module
- Memory module

Step 20. Connect all the cables to the new motherboard.

Step 21. Reattach the EMI cover, middle cover, optical drive, stand holder, foot cover and stand base.

---

## Replacing the LED panel


**Note:** Turn off the computer and wait 3 to 5 minutes to let it cool down before removing the cover.

**Note:** It may be helpful to place the computer face-down on a soft flat surface for this procedure. Lenovo recommends that you use a blanket, towel, or other soft cloth to protect the computer screen from scratches or other damage.

**To replace the LED panel:**

- Step 1. Remove any media (disks, CDs, DVDs, or memory cards) from the drives, shut down the operating system, and turn off the computer and all attached devices.
- Step 2. Unplug all power cords from electrical outlets.
- Step 3. Disconnect all cables attached to the computer. This includes power cords, input/output (I/O) cables, and any other cables that are connected to the computer. Refer to “Left and right view” and “Rear view” for help with locating the various connectors.

- Step 4. Remove the stand base. Refer to “Removing the stand base”.
- Step 5. Remove the foot cover. Refer to “Removing the foot cover”.
- Step 6. Remove the optical drive. Refer to “Replacing the optical drive”.
- Step 7. Remove the stand holder. Refer to “Removing the stand holder”.
- Step 8. Remove the middle cover. Refer to “Removing the middle cover”.
- Step 9. Remove the EMI cover. Refer to “Removing the EMI cover”.
- Step 10. Remove the speaker system. Refer to “Replacing the speaker system”.
- Step 11. Remove the system fan. Refer to “Replacing the system fan”.
- Step 12. Disconnect the power switch board cable and camera cable from connectors on the motherboard:
- Step 13. Disconnect the cable from the connector on the front control board.
- Step 14. Remove the nine screws that secure the chassis to the front bezel.
- Step 15. Remove the two screws that secure the LED panel to the chassis.
- Step 16. Disconnect the converter cable and LVDS cable from the connectors on the LED panel.
- Step 17. Lift up the chassis to separate the LED panel from the chassis.

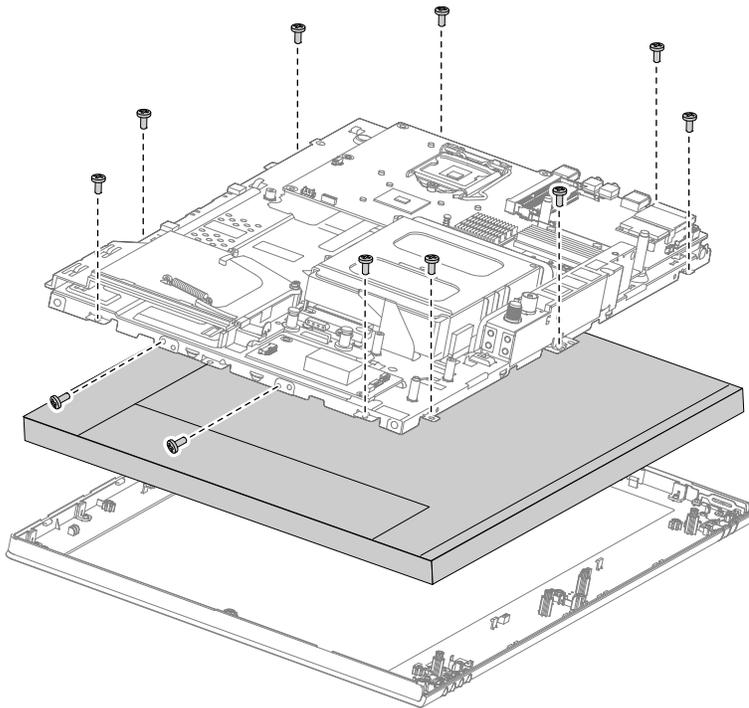

- Step 18. To install the new the LED panel:
  - a. Line up the chassis with new LED panel, and then secure the new LED panel to the chassis with the two screws.
  - b. Connect the converter cable and LVDS cable to the new LED panel.
  - c. Line up the chassis with the front bezel, and then place the chassis into position.
  - d. Secure the chassis to the front bezel with the nine screws.
  - e. Reconnect all the camera and power switch board cables to the connectors on the motherboard.
  - f. Reconnect the front control board cable back to the connector on front control board.

Step 19. Reattach the system fan, speaker system, EMI cover, middle cover, stand holder, optical drive, foot cover and stand base.




## Chapter 9. FRU lists

This chapter lists the information on the field replaceable units (FRUs).

**Attention:** Be sure to read and understand all the safety information before replacing any FRUs.

**Notes:** FRUs that have a 1 or 2 in the CRU column are Customer Replaceable Units (CRUs).

- 1- identifies parts that are fairly simple to replace, requiring few or no tools.
- 2- identifies parts that are slightly more difficult to replace.
- N-identifies parts that are not to be replaced by the customer.

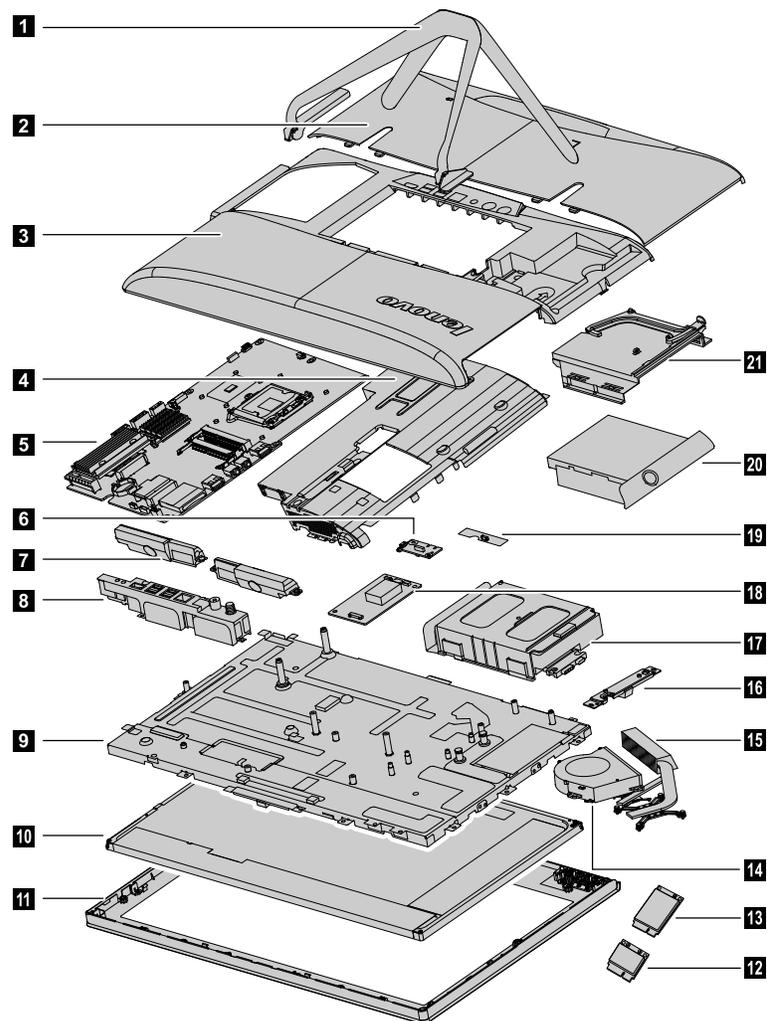

| Item# | Description    | Service Part Number | CRU ID |
|-------|----------------|---------------------|--------|
| 1     | Computer stand |                     |        |

|          |  |          |   |
|----------|--|----------|---|
|          | C540 STAND (BOTTOM)                    | 90202088 | N |
|          | C540 STAND (TOP)                       | 90202089 | N |
|          |  |          |   |
| <b>2</b> | <b>Foot cover</b>                      |          |   |
|          | C540 SLIDE COVER (BK)                  | 90202086 | N |
|          | C540 SLIDE COVER (WH)                  | 90202087 | N |
|          |  |          |   |
|          |  |          |   |
| <b>3</b> | <b>Middle cover</b>                    |          |   |
|          | C540 BACK COVER W/TV_HDMI W/O ODD(BK)  | 90202090 | N |
|          | C540 BACK COVER W/TV_HDMI W/O ODD(WH)  | 90202091 | N |
|          | C540 BACK COVER W/O TV_HDMI_ODD(BK)    | 90202198 | N |
|          | C540 BACK COVER W/O TV_HDMI_ODD(WH)    | 90202199 | N |
|          | C540 BACK COVER W/HDMI_ODD W/O TV(BK)  | 90202200 | N |
|          | C540 BACK COVER W/HDMI_ODD W/O TV(WH)  | 90202201 | N |
|          | C540 BACK COVER W/TV_HDMI_ODD(BK)      | 90202202 | N |
|          | C540 BACK COVER W/TV_HDMI_ODD(WH)      | 90202203 | N |
|          | C540 BACK COVER W/TV_ODD W/O HDMI(BK)  | 90202204 | N |
|          | C540 BACK COVER W/TV_ODD W/O HDMI(WH)  | 90202205 | N |
|          | C540 BACK COVER W/TV W/O HDMI_ODD(BK ) | 90202206 | N |
|          | C540 BACK COVER W/TV W/O HDMI_ODD(WH ) | 90202207 | N |
|          | C540 BACK COVER W/HDMI W/O TV_ODD(BK)  | 90202208 | N |
|          | C540 BACK COVER W/HDMI W/O TV_ODD(WH)  | 90202209 | N |
|          | C540 BACK COVER W/O TV_HDMI W/ODD(BK)  | 90202210 | N |
|          | C540 BACK COVER W/O TV_HDMI W/ODD(WH)  | 90202211 | N |
|          |  |          |   |
| <b>4</b> | <b>EMI cover</b>                       |          |   |
|          | C540 EMI SHIELDING                     | 90202096 | N |
|          |  |          |   |
| <b>5</b> | <b>Motherboard</b>                     |          |   |
|          | C540 NON_WIN8 UMA W/USB3.0 MB          | 90001459 | N |
|          | C540 NON_WIN8 UMA W/O USB3.0 MB        | 90001460 | N |
|          | C540 NON_WIN8 512M_GPU W/USB3.0 MB     | 90001461 | N |
|          | C540 NON_WIN8 512M_GPU W/O USB3.0 MB   | 90001462 | N |
|          | C540 NON_WIN8 1G_GPU W/USB3.0 MB       | 90001463 | N |
|          | C540 NON_WIN8 1G_GPU W/O USB3.0 MB     | 90001464 | N |
|          | C540 NON_WIN8 2G_GPU W/USB3.0 MB       | 90001465 | N |
|          | C540 NON_WIN8 2G_GPU W/O USB3.0 MB     | 90001466 | N |
|          | C540 WIN8_PRO UMA W/USB3.0 MB          | 90001467 | N |
|          | C540 WIN8_PRO UMA W/O USB3.0 MB        | 90001468 | N |

|           |                                      |          |   |
|-----------|--------------------------------------|----------|---|
|           | C540 WIN8_PRO 512M_GPU W/USB3.0 MB   | 90001469 | N |
|           | C540 WIN8_PRO 512M_GPU W/O USB3.0 MB | 90001470 | N |
|           | C540 WIN8_PRO 1G_GPU W/USB3.0 MB     | 90001471 | N |
|           | C540 WIN8_PRO 1G_GPU W/O USB3.0 MB   | 90001472 | N |
|           | C540 WIN8_PRO 2G_GPU W/USB3.0 MB     | 90001473 | N |
|           | C540 WIN8_PRO 2G_GPU W/O USB3.0 MB   | 90001474 | N |
|           | C540 WIN8 UMA W/USB3.0 MB            | 90001475 | N |
|           | C540 WIN8 UMA W/O USB3.0 MB          | 90001476 | N |
|           | C540 WIN8 512M_GPU W/USB3.0 MB       | 90001477 | N |
|           | C540 WIN8 512M_GPU W/O USB3.0 MB     | 90001478 | N |
|           | C540 WIN8 1G_GPU W/USB3.0 MB         | 90001479 | N |
|           | C540 WIN8 1G_GPU W/O USB3.0 MB       | 90001480 | N |
|           | C540 WIN8 2G_GPU W/USB3.0 MB         | 90001481 | N |
|           | C540 WIN8 2G_GPU W/O USB3.0 MB       | 90001482 | N |
|           |                                      |          |   |
|           |                                      |          |   |
| <b>6</b>  | <b>Power switch board</b>            |          | N |
|           | C540 LED POWER BOARD W/SWTV          | 90001760 | N |
|           | C540 LED POWER BOARD W/O SWTV        | 90001761 | N |
|           |                                      |          |   |
|           |                                      |          |   |
| <b>7</b>  | <b>Speakers</b>                      |          | N |
|           | C540 Speaker ( L+R )                 | 90201931 | N |
|           |                                      |          |   |
| <b>8</b>  | <b>Rear I/O module</b>               |          |   |
|           |                                      |          |   |
|           |                                      | ??       |   |
|           |                                      |          |   |
| <b>9</b>  | <b>Chassis</b>                       |          | N |
|           | C540 MAIN FRAME FOR SAM              | 90202099 | N |
|           | C540 MAIN FRAME FOR LG               | 90202100 | N |
|           | C540 MAIN FRAME FOR CMI              | 90202101 | N |
|           |                                      |          |   |
| <b>10</b> | <b>LED panel</b>                     |          | N |
|           | LM230WF5-TLF1                        | 18200163 | N |
|           | LTM230HT10                           | 18200081 | N |
|           | M230HGE-L20 C1                       | 18200165 | N |
|           |                                      |          |   |
| <b>11</b> | <b>Front bezel</b>                   |          | N |

|           |  |          |   |
|-----------|--|----------|---|
|           | C540 FRONT BEZEL (BK)                    | 90202102 | N |
|           | C540 FRONT BEZEL (WH)                    | 90202103 | N |
|           |  |          |   |
| <b>12</b> | <b>Wi-Fi card</b>                        |          | N |
|           | CBT AR9485 11n SB HMC WiFi card(wowl)    | 11200354 | N |
|           | LTN RTL8188CE 11n SB HMC WiFi card(wowl) | 11200352 | N |
|           |  |          |   |
| <b>13</b> | <b>TV-Tuner card</b>                     |          | N |
|           | Avermedia H339BB DVB-T Mini TV Card      | 11200290 | N |
|           | Avermedia H334 DVB-T Mini TV Card        | 11201071 | N |
|           | Avermedia H339BA ATSC Mini TV Card       | 11200291 | N |
|           | Avermedia H334 ATSC Mini TV Card         | 11201072 | N |
|           |  |          |   |
|           |  |          |   |
| <b>14</b> | <b>System fan</b>                        |          | N |
|           | C540 AVC Fan                             | 90201929 | N |
|           | C540 Delta Fan                           | 90201930 | N |
|           |  |          |   |
|           |  |          |   |
| <b>15</b> | <b>Heat-sink</b>                         |          | N |
|           | C540 AVC UMA HeatSink                    | 90201925 | N |
|           | C540 Coolermaster UMA HeatSink           | 90201926 | N |
|           | C540 AVC DIS HeatSink                    | 90201927 | N |
|           | C540 Coolermaster DIS HeatSink           | 90201928 | N |
|           |  |          |   |
|           |  |          |   |
| <b>16</b> | <b>Camera</b>                            |          |   |
|           | Bison M720P VC OV9712 CAM                | 20200085 | N |
|           | CCY M720P VC OV9712 CAM                  | 20200086 | N |
|           |  |          |   |
|           |  |          |   |
| <b>17</b> | <b>Hard disk drive and bay</b>           |          |   |
|           | SGT Pharaoh 4K ST500DM002 500G HDD-LH    | 16200178 | 1 |
|           | SGT Grenada ST1000DM003 1TB HDD-LH       | 16200182 | 1 |
|           | Seagate Grenada BP ST1000DM003           | 16200293 | 1 |
|           | SGT Grenada ST2000DM001 2TB HDD-LH       | 16200184 | 1 |
|           |  |          |   |
|           |  |          |   |
| <b>18</b> | <b>Converter board</b>                   |          |   |

|           |                              |          |    |
|-----------|------------------------------|----------|----|
|           | C540 CONVERT BOARD FOR SAM   | 90001757 | N  |
|           | C540 CONVERT BOARD FOR LG    | 90001758 | N  |
|           | C540 CONVERT BOARD FOR CMI   | 90001759 | N  |
|           |                              |          |    |
|           |                              |          |    |
| <b>19</b> | <b>Front function board</b>  |          |    |
|           | C540 FUNCTION BOARD          | 90001762 | N  |
|           |                              |          |    |
| <b>20</b> | <b>Optical drive</b>         |          |    |
|           | HLDS GT50N                   | 25201635 | N  |
|           | PLDS DS-8A9SH                | 25209016 | N  |
|           | HLDS GT80N                   | 25209015 | N  |
|           |                              |          |    |
|           |                              |          |    |
| <b>21</b> | <b>Optical drive bracket</b> |          |    |
|           | ??                           | ??       | ?? |



---

## Chapter 10. General information

This chapter provides general information that applies to all computer models covered by this manual.

---

### Additional Service Information

This chapter provides additional information that the service representative might find helpful.

#### Power management

Power management reduces the power consumption of certain components of the computer such as the system power supply, processor, hard disk drives, and some monitors.

#### Advanced configuration and power interface (ACPI) BIOS

As this computer has an ACPI BIOS system, the operating system is allowed to control the power management features of the computer and the settings for Advanced Power Management (APM) BIOS mode is ignored. Not all operating systems support ACPI BIOS mode.

#### Automatic Power-On features

The Automatic Power-On features within the Power Management menu allow you to enable and disable features that turn on the computer automatically.

- **Wake Up on Alarm:** You can specify a date and time at which the computer will be turned on automatically. This can be either a single event, a daily event or a weekly event.
- **Wake Up on LAN:** This feature allows LAN adapter card to wake the System.