

## 8 Port VGA Video Extender over Cat 5 (UTPE Series)

Product ID: ST128UTPE



The ST128UTPE 8 Port VGA Video Extender over Cat 5 (UTPE Series) allows up to 9 (1 local and 8 remote) monitors to be connected to a single VGA source.


The video signal is carried to the remote monitors over standard 4 pair Category 5 and Category 6 UTP cable using RJ45 connectors and supports distances of up to 300m / 950ft.

At each remote monitor an STUTPRXL receiver (see accessories) is required. The receiver unit converts the signal from the UTP cable back into VGA video for the monitor.

Backed by a StarTech.com 2-year warranty and free lifetime technical support.

### Digital Signage

**Data Sheet**

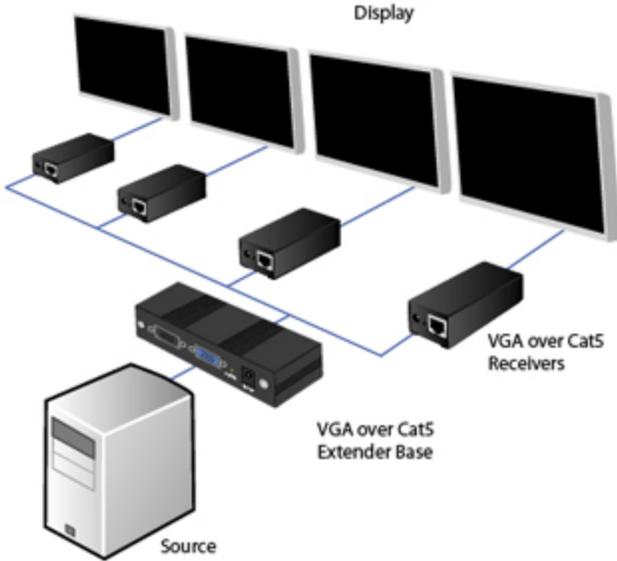

### Certifications, Reports and Compatibility



### Applications

- Ideal for digital signage applications in financial, educational, and business sectors
- Place the display in a convenient viewing area, while the system equipment is placed elsewhere in a clean and secure environment
- Use digital signage to catch the attention of your audience and deliver up to date content the way you want it to be seen and heard

### Features

- Simultaneously displays the same image on 8 monitors
- Supports a maximum resolution of 1280 x 1024 @ 60 Hz refresh rate
- Monitor receivers are sold separately (See STUTPRXL)
- Monitors can be up to 300m / 950ft away
- Cascadable up to three levels

|                                 |                                     |   |
|---------------------------------|-------------------------------------|---|
| <b>Hardware</b>                 | Warranty                            | 2 Years   |
|                                 | Audio                               | No  |
|                                 | Cabling                             | Cat 5 UTP or better   |
|                                 | Daisy-Chain                         | Yes   |
|                                 | Ports                               | 8   |
| <b>Performance</b>              | Max Distance                        | 300 m / 950 ft  |
|                                 | Maximum Analog Resolutions          | 1280 x 1024   |
| <b>Connector(s)</b>             | Local Unit Connectors               | 2 - VGA (15 pin, High Density D-Sub) Female<br>8 - RJ-45 Female   |
|                                 | <b>Special Notes / Requirements</b> | System and Cable Requirements<br>One <a href="#">STUTPRXL</a> receiver unit per display that you are connecting |
| <b>Power</b>                    | Input Voltage                       | 120 AC  |
|                                 | Output Current                      | 0.6A  |
|                                 | Output Voltage                      | 12 DC   |
|                                 | Power Consumption (In Watts)        | 7.2   |
|                                 | Power Source                        | AC Adapter Included   |
| <b>Physical Characteristics</b> | Color                               | Black   |
|                                 | Enclosure Type                      | Aluminum  |
|                                 | Product Height                      | 1.2 in [29.5 mm]  |
|                                 | Product Length                      | 3.3 in [83.5 mm]  |
|                                 | Product Weight                      | 8.7 oz [247 g]  |
|                                 | Product Width                       | 7.9 in [200 mm]   |
| <b>Packaging Information</b>    | Shipping (Package) Weight           | 2.3 lb [1.1 kg]   |
| <b>What's in the Box</b>        | Included in Package                 | 1 - UTP Video Splitter Base Unit  |
|                                 |                                     | 1 - 6ft (1.8m) VGA Cable  |
|                                 |                                     | 1 - Universal Power Adapter (NA/UK/EU/AUS)  |
|                                 |                                     | 1 - Instruction Manual  |

Product appearance and specifications are subject to change without notice.