

## 2 Port VGA KVM Switch, PS2 and USB

GCS1722



- One PS/2-USB VGA console controls two VGA interface computers.
- Dual Interface - supports computers with PS/2 or USB keyboards and mice
- Computer selection via front panel pushbuttons, hotkeys, and mouse
- Multiplatform support – Windows, Linux, Mac, and Sun\*
- Superior video quality – 2048 x 1536; DDC2B
- Video DynaSync™ optimizes display resolution and eliminates boot-up display problems
- Supports widescreen resolutions
- Console mouse port emulation/bypass feature supports most mouse drivers and multifunction mice
- Complete keyboard emulation for error-free booting
- Mac/Sun keyboard support and emulation
- Multilingual keyboard mapping – supports English, Japanese, and French keyboards
- Gaming keyboard support
- Auto Scan Mode for monitoring all computers
- Firmware upgradable
- Power supply not required

IOGEAR's VGA KVM Switch with Video DynaSync™ technology eliminates boot-up display problems and optimizes resolution while bringing dual console keyboard and mouse ports. Users can now use any combination of PS/2 or USB keyboard and mouse. With no software to configure, setting up GCS1722 is quick and easy! The setup is simple; just plug cables into their appropriate ports.


Having a single console manage all of the computers helps to eliminate the expense of purchasing individual console components for each unit, and saves space and energy those extra components would use. IOGEAR's VGA KVM Switch saves users time and money!



## 2 Port VGA KVM Switch, PS2 and USB

### How does it work?

- Plug your keyboard and mouse into the PS/2 or USB console ports.
- Plug your console monitor into the VGA console port and turn on your monitor.
- Plug the KVM cables into their appropriate ports and power on the computers.

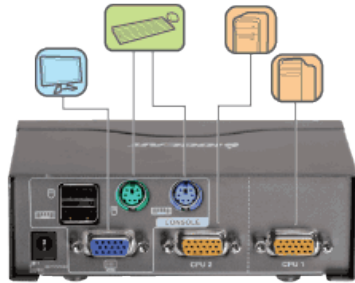

### Product Requirements

- Console
- A VGA compatible monitor capable of the highest possible resolution
  - A USB or PS/2 mouse
  - A USB or PS/2 keyboard

### Computers

- The following equipment must be available on each computer:
- A VGA port
- Type A USB ports or 6-pin Mini-DIN PS/2 ports

### Package Contents

- 1 GCS1722 2 Port VGA KVM Switch, PS2 and USB
- 2 Custom KVM Cable sets
- 1 User Manual
- 1 Warranty Card

## Specifications

Function	GCS1722	Dimensions	GCS1722
Console Connectors		Unit Dimensions	
Keyboard & Mouse	USB and PS/2	Height	1.81" (4.60 cm)
Monitor		Depth	2.94" (7.47 cm)
CPU Connectors		Length	5.13" (13.03 cm)
Keyboard, Mouse, and Monitor	SPHD-18	Unit Package Dimensions	
		Width	9.50" (24.13 cm)
		Height	6.38" (16.21 cm)
		Depth	2.38" (6.05 cm)
		Master Carton	
		Width	15.00" (38.10 cm)
		Height	7.38" (18.75 cm)
		Depth	10.25" (26.04 cm)
		Master Carton Qty.	6
		Weight	
		Master Carton Wt.	14.88 lb
		Unit Pack Wt.	2.25 lb
		Unit Wt.	1.05 lb