

# Pixio

## USER MANUAL

---

### PX160

The color and the appearance may differ depending on the product, and the specifications are subject to change without prior notice to improve the performance.

The contents of this manual are subject to change without notice to improve quality.

Copyright © 2019 Pixio USA Inc. | Pixio is a registered trademark of Pixio USA Inc. | All Rights Reserved.

Use or reproduction of this manual in parts or entirety without the authorization of Pixio USA Inc is prohibited.

All other trademarks are owned by their respective owners. Rev.1.01Copyright © 2019 Pixio USA Inc. | Pixio is a registered trademark of Pixio USA Inc. All Rights Reserved.



Brand: Pixio  
Product Name: 15.6in IPS Premium Portable Monitor  
Product Code: PX160  
FCC ID: LCS200714069AE

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

# JOIN THE **RED TEAM** !

- Get all the latest updates and exclusive promotions
- Chances to win monthly, free giveaways

*Pixio*

**RED TEAM**

[www.pixiogaming.com](http://www.pixiogaming.com)

**RISK OF ELECTRIC SHOCK DO NOT OPEN THE MONITOR.  
OPENING MONITOR BACK COVER WILL VOID YOUR WARRANTY.**



This symbol indicates that high voltage is present inside.  
It is dangerous to make any kind of contact with any internal part of  
this product.



This symbol alerts you that important literature concerning operation  
and maintenance has been included with this product.

# Before Using the Product.

## Installation Space

Ensure some space around the product for ventilation. An internal temperature rise may cause fire and damage the product. Make sure to allow some space. Do not install near heater or any other high temperature product or humidifier.



- Do not place the monitor near heat sources, such as radiators, and do not expose the monitor to direct sunlight for an extended period of time.
- Make sure to keep the original packaging material. If there are any needs to transport the monitor, the packaging material will be the best method for successful delivery.
- Make sure to use a soft, non-abrasive cloth when cleaning the monitor. Do not use corrosive or strong detergents to clean the monitor. They may result in permanent damage to the panel and will void the warranty.
- Always check to make sure the power cord is unplugged before cleaning the monitor.
- Be careful when handling liquids while cleaning as it may cause irreparable damage to the electrical components in the monitor.



- Make sure the monitor is not placed near any source of water, such as the bathroom, kitchen, or humid areas.
- Do not place the monitor on an unstable, or uneven surface. If dropped, the monitor may cause bodily injuries. When transporting the monitor, make sure it is secured in an upright position or preferably in its original packaging for best results. When mounting the monitor, make sure to follow the instructions of the respective mounting provider for best results.
- The openings in the monitor are for ventilation. For best results, make sure the ventilation holes are not covered up. Avoid confined spaces like a bookcase for proper functionality.
- If the monitor will not be used for an extended period of time, make sure to unplug the power cord to prevent the risk of damage from lighting strikes or other abnormal voltage incidents.
- Do not overburden any socket to prevent risk of fire or shock.
- Do not stick any foreign objects into the monitor to prevent risk of fire or shock.
- Please do not try to take off the back panel to repair the monitor yourself. You may run the risk of shock and void the warranty as well. Contract Pixio directly for all RMA issues.
- Take note of elevation and temperature zone warnings on the adapters.
- The  icon indicates that the adapter is suited for areas under 2000 meters.
- The  icon indicates that the adapter is suited for non-tropical areas.

# Cleaning the Product.

Take the following steps when cleaning.

1 Power off the product and computer.



2 Disconnect the power cord from the product.

Hold the power cable by the plug and do not touch the cable with wet hands. Otherwise, an electric shock may result.



3 Wipe the monitor with a clean, soft and dry cloth.

Do not apply a cleaning agent that contains alcohol, solvent, or surfactant to the monitor.

Do not spray water or detergent directly on the product.

4 Wet a soft and dry cloth in water and wring thoroughly to clean the exterior of the product.

5 Connect the power cord to the product when cleaning is finished.

6 Power on the product and computer.

# Notice.

## Characteristics of Crystal Display Monitors

When the following potential issues occur, please be aware that the monitor is functioning in accordance of manufacturing tolerances and does not mean the monitor has a defect.

- When first turning on the monitor, the screen may flicker. Please turn the monitor off and turn it back on.
- The brightness levels on different images may appear uneven.
- The effective pixel count should approximate 99.99%, but there may be a possible 0.01% or less failure rate due to dead or stuck pixels.
- If the monitor displays a single static image for a long period of time, there may be an image burn that can be seen while viewing a different image. The burned image will gradually disappear and turning off the monitor for an extended period of time will speed up the process.
- If you notice extended, constant flickering or if the screen constantly goes to black, please contact Pixio directly and we will assess and have the unit repaired if necessary. Please do not attempt to repair the unit yourself as it will result in voiding the warranty.

# Preperation.


## Product Includes:



Cover Case



HDMI Cable



USB-A Cable




USB-C Cable




Power Adapter


# Product Assembly:

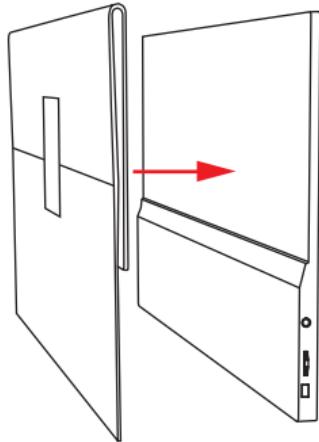

- 1 Attach the magnetic case cover in the direction of the arrow to the back of the display.



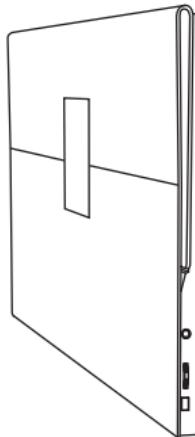


- 2 Case assembly complete.

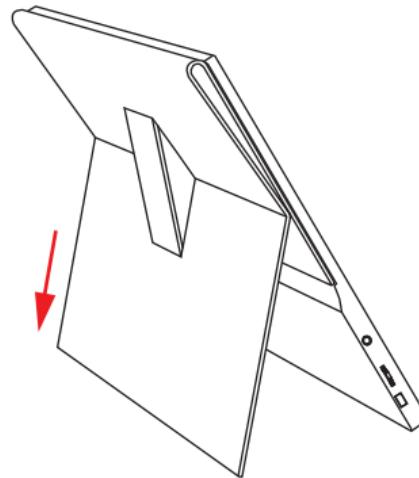



- 3 Pull apart the non-magnetic cover of the case and stand it up.

## Dimension & Weight.

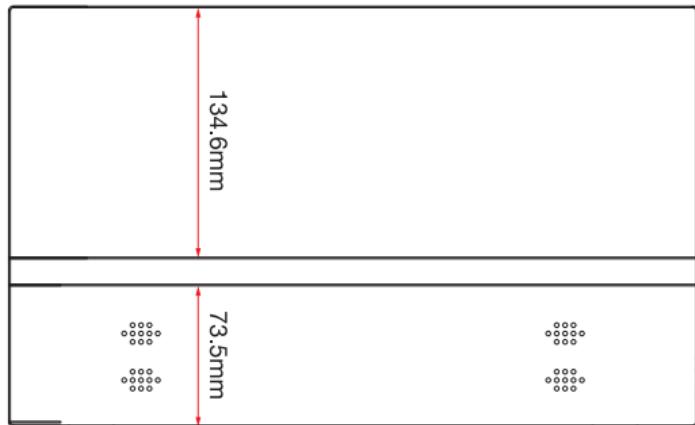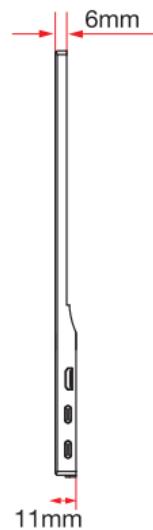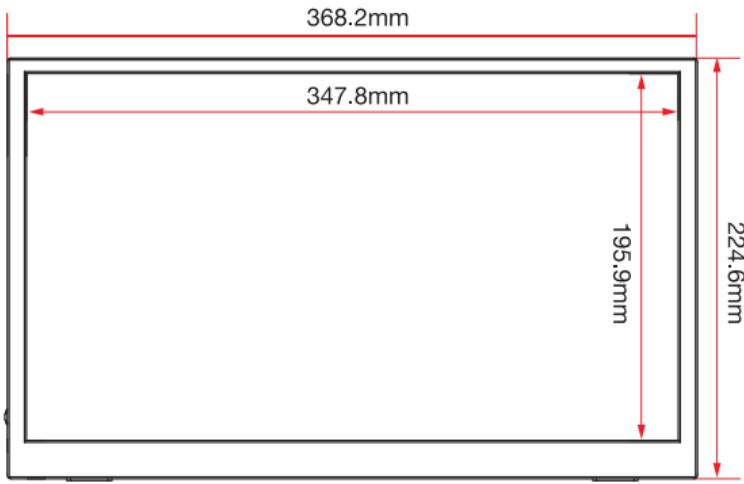


Net Weight: 0.8kg (1.8lb) | Gross Weight: 1.5kg (3.3lb)

# Monitor Inputs.

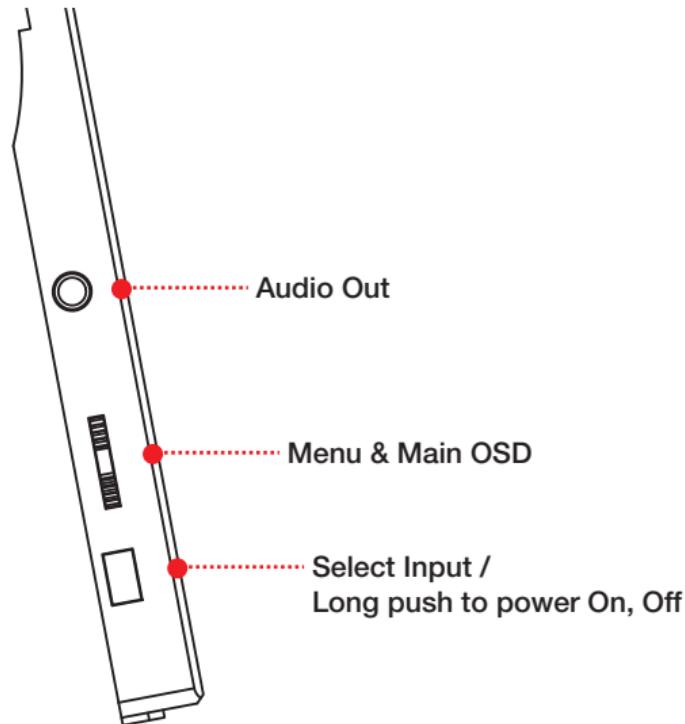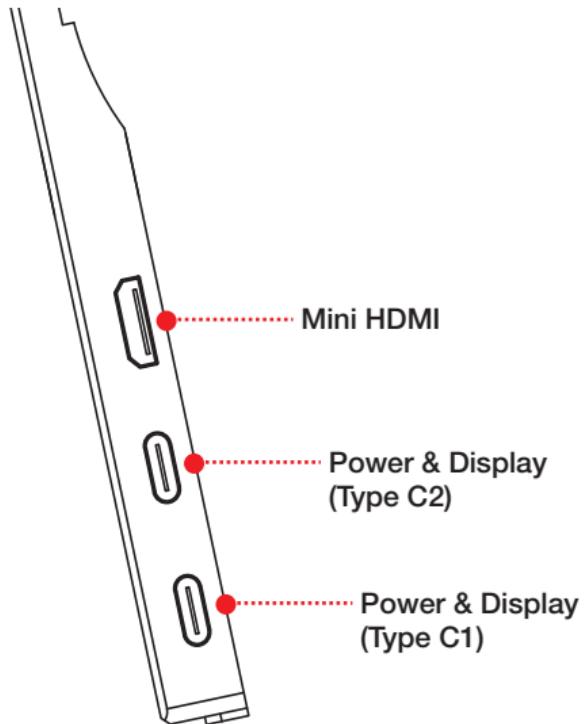

# Control Panel.

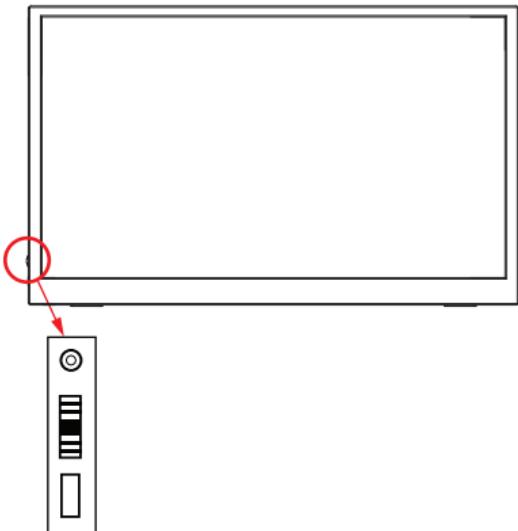

## Menu Short Cut



Brightness  80



Volume  50



Type C  
HDMI

Adjust Brightness

Adjust Volume

Select Input /  
Long push to power On, Off.

## Main OSD Navigation



Move Up (Select Previous Item) / Add Value



Move Down (Select Next Item) / Subtract Value




Move to next level / Enter (Select)



Back to previous level / Close OSD in First level.


# How to Guide.

## ① HDMI of the PC as the signal source

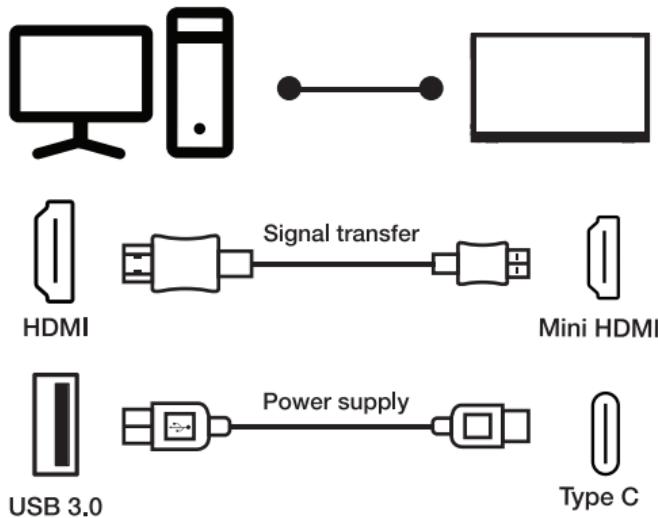


Note : Please use included Power Adapter for power supply.

## ② Type-c of the laptop as the signal source

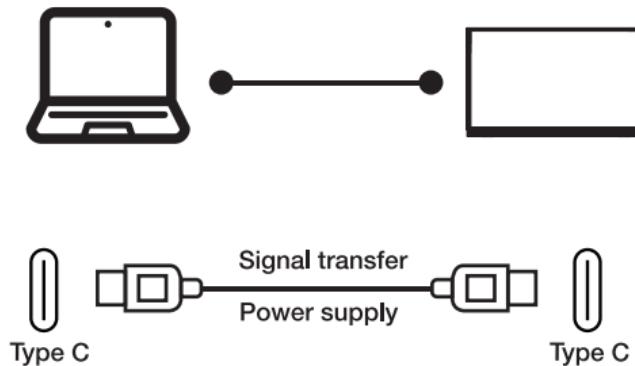

Note : For portable connection, your laptop USB-C must support video-out connectivity & power from laptop charger if not fully charged.  
Otherwise, you will need to use HDMI and Power Adapter.

### ③ Type-c of the mobile phone as the signal source

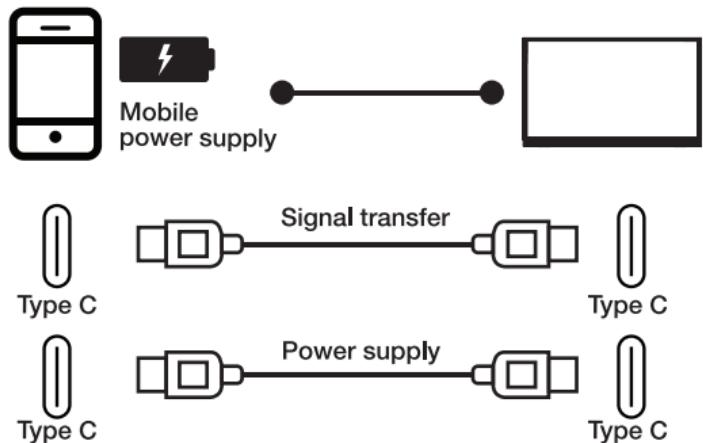


Note : For portable connection, your mobile USB-C must support video-out connectivity & power from mobile charger if not fully charged. Otherwise, you will need to use Power Adapter.


### ④ Audio Out



Connect to the Audio Out



# OSD Menu.

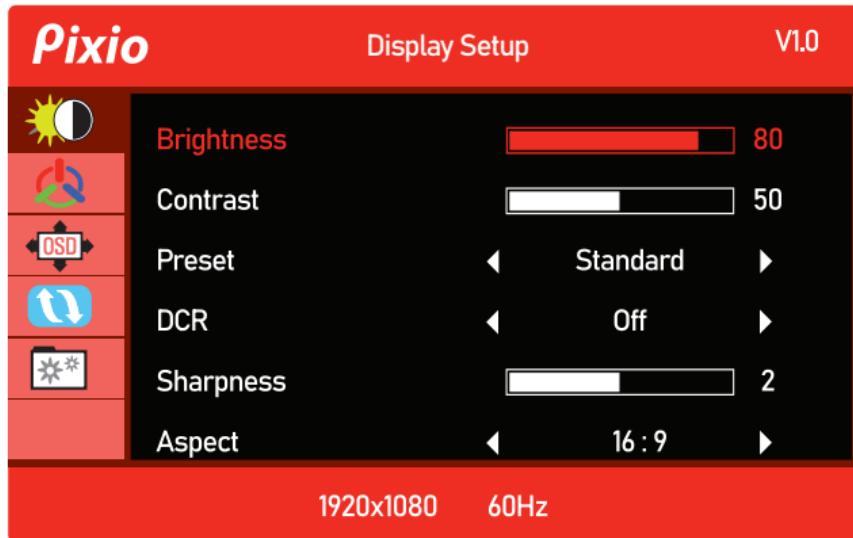

## Brightness

Adjust the display brightness value from 0 to 100.

## Contrast

Adjust the display contrast value from 0 to 100.

## Preset

Select Preset from Standard, RTS, FPS, Text, Movie and Game.

## DCR

Turn Dynamic Contrast Ratio feature On or Off.


## Sharpness

Allows the clarity in the case of blur or excessive clarity.

Value from 0 to 4.

## Aspect

Allows selection of video format of the between 16:9 and 4:3

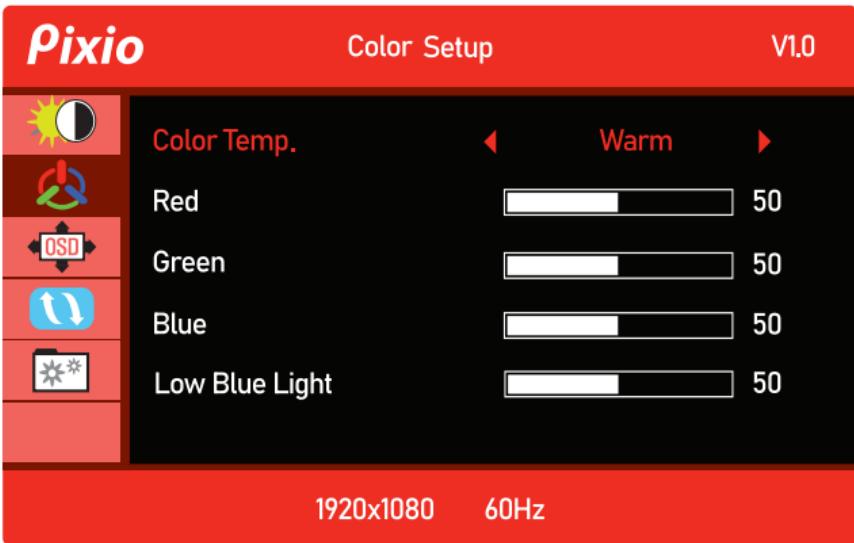

### Color Temp.

Select Color Temp. From Warm, 5800, sRGB, Cool, 7500 and User.

#### Red

Adjust the Red value from 0 to 100.

#### Green

Adjust the Green value from 0 to 100.

#### Blue

Adjust the Blue value from 0 to 100.

#### Low Blue Light

Adjust the Low Blue Light value from 0 to 100.

**Pixio**

OSD Setup

V1.0



Language



OSD H.Position

50



OSD V.Position

50



OSD Timer

30



Transparency

50

1920x1080

60Hz

### Language

Select language. From English, Japanese, Chinese, and Korean.

### OSD H.Position

Adjust the OSD H.Position value from 0 to 100.

### OSD V.Position

Adjust the OSD V.Position value from 0 to 100.

### OSD Timer

Adjust the OSD Timer value from 10 to 60.

### Transparency

Adjust the Transparency value from 0 to 100.

**Pixio**

Reset

V1.0



Reset



Auto Power Off

◀ Off ▶



HDR Mode

◀ Off ▶



Black Equalizer

50

1920x1080

60Hz

### Reset

Returns the monitor to its factory default settings.

### Auto Power Off

Allow automatic shutdown from Off to 240 min.

### HDR Mode

Select HDR mode. On or Off.

### Black Equalizer

Adjust the Black Equalizer value from 0 to 100.

**Pixio**

Misc.

V1.0



Input Select

◀ HDMI ▶

Mute

◀ Off ▶

Volume

◀  ▶

50

Overdrive

◀ Off ▶

Freesync

◀ Off ▶

1920x1080

60Hz

### Input Select

Select Input source from HDMI and Type C.

### Mute

Turn Mute On or Off.

### Volume

Adjust the Volume value from 0 to 100.

### Overdrive

Select Overdrive mode. From Off, High, Middle or Low.

### Freesync

Turn Freesync On or Off.

# Adaptive-sync. (FreeSync)



FreeSync technology is a solution that eliminates screen tearing without all the usual lag and latency. This feature will eliminate screen tearing and lag during game play. Improve your gaming experience. The displayed FreeSync menu items on the monitor may vary, depending on the monitor model and compatibility with the AMD graphics card.

# *Pixio*

If you have any questions or comments, please contact us below.

**USA:**

cs@pixiogaming.com

**JAPAN:**

support@pixiogaming.jp  
[www.pixiogaming.jp/support](http://www.pixiogaming.jp/support)

For your warranty information, please visit [www.pixiogaming.com](http://www.pixiogaming.com)