

## THIN DISPLAYS

# Built for business

Not just LCD panels. These are productivity panels.

We've designed-in more than 20 years of experience, innovation and leadership in digital projectors to create a line of LCD panels designed for collaboration, presentations, demonstrations, web meetings and video conferencing. InFocus flat panel displays provide the benefits and performance you need in the meeting room and can't find in consumer TVs.

InFocus large format LCD panels deliver gorgeous images and video – at prices that fit your lean budget. They connect easily and automatically with the computer and video sources you use in your business.

### Everything you need in a business-class display

Available in three sizes, InFocus productivity panels deliver full 1080p native resolution and handle computer resolutions up to WUXGA (1920 × 1200) as well as standard and High Definition video signals.

RS232 port allows InFocus productivity panels to integrate easily with Crestron and AMX digital media and room control systems that handle an array of AV sources, computer inputs and lighting controls.

Amplified speakers provide full audio-video support.

The SplitScreen™ feature allows you to display two full-size images or video simultaneously. Focus on the critical content. Easily switch, shrink and enlarge side by side images for emphasis.

INF Series panels include an anti burn-in feature that eliminates image burn-in even if the panel is on all day.

### Your investment is protected:

- Designed for commercial use with durable metal housings and commercial grade power supplies
- Easily upgradable with firmware
- Protected with a 3-year warranty

**We did leave one thing out... a high price.**



INF4201

42" DISPLAY

INF5501

55" DISPLAY

INF6501


65" DISPLAY



INF5501 Connectivity Options


#### Connectivity options

VGA (HD15)	HDMI	RS232
Component Video	Composite Video	S-Video
3.5 mm audio in	Audio out	Monitor out

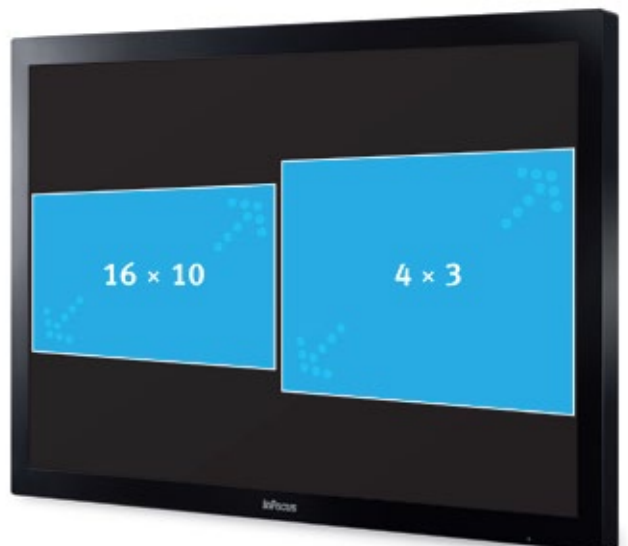

InFocus Dynamic SplitScreen Feature

# THIN DISPLAYS

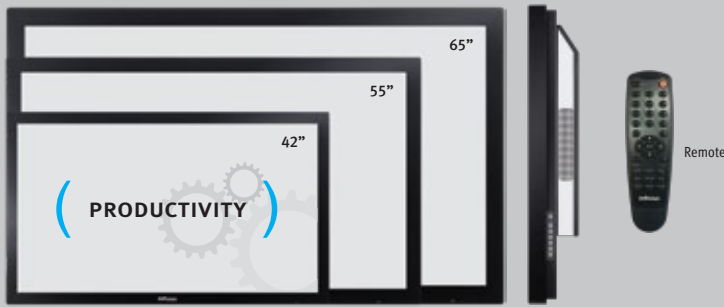

	INF4201	INF5501	INF6501
Width	40.2" / 1021 mm	51.5" / 1308 mm	61.7" / 1567 mm
Depth	4.9" / 125 mm	5.3" / 135 mm	6.1" / 155 mm
Height	24.2" / 615 mm	30.6" / 777 mm	37.1" / 942 mm

## Optional Accessories

Wall Mount (SP-INF-WALLMNT)  
LiteShow II Wireless Adapter (INLITESHOW2)  
Cables & Adapters

INF Series do not ship standard with a mount or stand. They do utilize standard VESA patterns.

## LiteShow II™

Eliminate cables and speed set-up time with LiteShow II wireless adapter. Switch presenters in seconds and transmit data, audio, and video over a 300' (95 m) range.



LiteShow II

For more information, please visit:  
[www.infocus.com/Accessories.aspx](http://www.infocus.com/Accessories.aspx)

## 3-Year Warranty

All InFocus flat panel displays are backed with a 3-year limited factory warranty. Protect your investment for the long haul with our extended warranty.

For more information, please visit:  
[www.infocus.com/Support/Warranty.aspx](http://www.infocus.com/Support/Warranty.aspx)



# InFocus

Bright Ideas Made Brilliant

**INFOCUS CORPORATE HEADQUARTERS**  
13190 SW 68th Parkway  
Portland, Oregon 97223-8368, USA  
Phone: (1) 503-207-4700  
Toll Free: (1) 877-388-8385  
Fax: (1) 503-207-1937

**INTERNATIONAL HEADQUARTERS**  
1 Fullerton Road  
One Fullerton  
Singapore 049213  
Phone: (65) 6513-9600  
Fax: (65) 6238-0535

# Specifications\*

	INF4201	INF5501	INF6501
Diagonal Size (Viewable)	INF4201 – 42" LCD with Anti-Glare Coating INF5501 – 55" LCD with Anti-Glare Coating INF6501 – 65" LCD with Anti-Reflective Coating		
Panel Technology	a-si TFT Active Matrix LCD		
Surface Treatment	Anti-Glare Coating		
Brightness	450 cd/m <sup>2</sup>		
Native Resolution	1920 × 1080		
Contrast Ratio	5000:1 Native		
Pixel Pitch	INF4201 – 0.019" / .48 mm	INF5501 – 0.025" / .63 mm	INF6501 – 0.026" / .65 mm
Display Colors	INF4201 – 16.7 M 24-bit TrueColor	INF5501 – 1.07 G 30-bit TrueColor	INF6501 – 1.07 G 30-bit TrueColor
Viewing Angle (H / V)	INF4201 & INF5501 – 176° / 176° INF6501 – 178° / 178°		
Active Area (H × W)	INF4201 – 36.6" × 20.6" / 930 mm × 523 mm	INF5501 – 47.6" × 26.8" / 1209 mm × 681 mm	INF6501 – 56.2" × 31.6" / 1428 mm × 803 mm
Power Supply	110 – 240 V AC		
Audio	10 W × 2		
Input Sources	VGA (HD15) × 1, S-Video × 1, Composite Video × 1, Component × 1, HDMI 1.3 × 2, Audio (3.5 mm Stereo × 1, RCA Stereo × 1)		
Output Control	Audio (S-PDIG Digital Audio Output) × 1, RS232		
VESA Standard	INF4201 – 15.7" × 7.9" / 400 mm × 200 mm	INF6501 & INF5501 – 23.6" × 15.7" / 600 mm × 400 mm	
Product Color	InFocus Black		
Product Weight (without stand)	INF4201 – 48.5 lbs / 22 kg	INF5501 – 96.5 lbs / 43.8 kg	INF6501 – 147.7 lbs / 67 kg
Shipping Weight	INF4201 – 61.7 lbs / 28 kg	INF5501 – 119 lbs / 54 kg	INF6501 – 196.2 lbs / 89 kg
Product Dimensions - W×D×H (without stand)	INF4201 – 40.2" × 4.9" × 24.2" / 1021 mm × 125 mm × 615 mm	INF5501 – 51.5" × 5.3" × 30.6" / 1308 mm × 135 mm × 777 mm	INF6501 – 61.7" × 6.1" × 37.1" / 1567 mm × 155 mm × 942 mm
Ships With - Accessories	Registration Card, Warranty Card, Quick Start Card, CD with User Manual, Power Cord, VGA Cable, Remote**, Cleaning Cloth		
Menu Language	English		
Operating Temperature	5°C ~ 35°C		
Operating Humidity	90% at 40°C		
Maximum Altitude	10,000 ft / 3098 m		
Product Warranty	3 Years Parts and Labor		
Accessories Warranty	90 Days		
Approvals	FCC B (USA), UL (USA)		

\* Product specifications, terms, and offerings are subject to change at any time without notice.  
\*\* Batteries not included.



For more information, please visit [www.infocus.com](http://www.infocus.com)

©2010 InFocus Corporation. All rights reserved. Specifications are subject to change without further notice. InFocus and InFocus Bright Ideas Made Brilliant are either trademarks or registered trademarks of InFocus Corporation in the United States and other countries. All trademarks are used with permission or are for identification purposes only and are the property of their respective companies. InFocus\_INF\_DS\_EN\_27APR10. Part Number: MMINFOCUS-0204.