



Easy Network, Trustable

# AC1200 Wireless Dual Band Gigabit Router

## WF2780



### Features:

- >802.11AC standard of next generation Wi-Fi technology
- >Workes seamlessly with all 802.11a/b/g/n/ac devices
- >2.4GHz 300Mbps & 5GHz 867Mbps simultaneous dual band
- >4\* 5dBi high gain antennas for powerful wireless coverage
- >Multiple SSID providing up to 6 additional wireless networks for visitors
- >Easy wireless security setup at a push of WPS button
- >Five Gigabit ports provide 10 times faster than conventional Fast Ethernet connections
- >Quick setup, with built-in multilingual web management page

### Brief:

The netis WF2780 Wireless AC Router delivers next generation Wi-Fi at Gigabit speeds. With simultaneous dual band Wi-Fi technology, it offers speeds up to 2.4GHz 300Mbps + 5GHz 867Mbps and avoids interference, ensuring top Wi-Fi speeds and reliable connections. This makes it ideal for larger homes with multiple devices. In addition, WF2780 provides Gigabit wired connectivity, which is 10 times faster than conventional Fast Ethernet connections, best for high speed file transfers and streaming HD media.

[www.netis-systems.com](http://www.netis-systems.com)


## AC1200 Wireless Dual Band Gigabit Router

## WF2780

### Specification:

Wireless	
Standards	IEEE 802.11b/g/n 2.4GHz; IEEE 802.11a/n/ac 5GHz
Signal Rate	Up to 300Mbps 2.4GHz; UP to 867Mbps 5GHz
Frequency Range	2.4-2.4835GHz; 5.180-5.825GHz
Transmit Power	20dBm (MAX)
Data Transfer Rate	802.11ac: 80MHz(433Mbps, 867Mbps) 802.11n: 40MHz(300Mbps, 270Mbps, 240Mbps, 180Mbps, 120Mbps, 90Mbps, 60Mbps, 30Mbps) 20MHz (144Mbps, 130Mbps, 115Mbps, 86Mbps, 57Mbps, 43Mbps, 28Mbps, 14Mbps) (Auto-Sense) 801.11g: (54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 11Mbps, 9Mbps, 6Mbps) 802.11b: (11Mbps, 9Mbps, 6Mbps, 5.5Mbps, 2Mbps, 1Mbps)
Wireless Mode	AP, WDS, AP+WDS, Repeater, Client, Multiple AP
Wireless Security	64/128-bit WEP SSID Broadcast Enable/Disable WPA-PSK/WPA2-PSK (TKIP/AES) Wireless MAC Filtering WPA/WPA2
Hardware	
Standard	IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3u 1000Base-TX
Interface	1 * 10/100/1000M Auto MDI/MDIX RJ45 WAN port; 4 * 10/100/1000M Auto MDI/MDIX RJ45 LAN port
LED	PWR, WPS, SYS, 2.4G, 5G, LAN1 ~4, WAN, WPS
Button	Default, WPS
Antenna	4 * external 5dBi antennas, omni-directional
Power Supply	DC 12V/1A (Output)
Dimensions(L x W x H)	145 x 155 x 35 mm
Weight	285g
Software	
WAN Type	DHCP, Static IP, PPPoE, L2TP, PPTP, Dual Access, WISP
Port Forwarding	Virtual Servers, Port Triggering, UPnP, DMZ, FTP Private Port
QoS	WMM, Bandwidth Control
Access Control	IP/MAC/Domain Filtering
VPN Pass-through	PPTP, L2TP, IPSEC
Others	DDNS, Static Routing, WOL, Remote Management, Firmware upgrade, Backup & Restore
Others	
Certification	FCC, CE, KC
Environment	Operating Temperature: 0°C~40°C Storage Temperature: -40°C~70°C Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing
Package	1 * WF2780    1 * 12V/1A Power Adapter    1 * Ethernet Cable    1 * Cradle    1 * Quick Installation Guide

### Topological Graph:

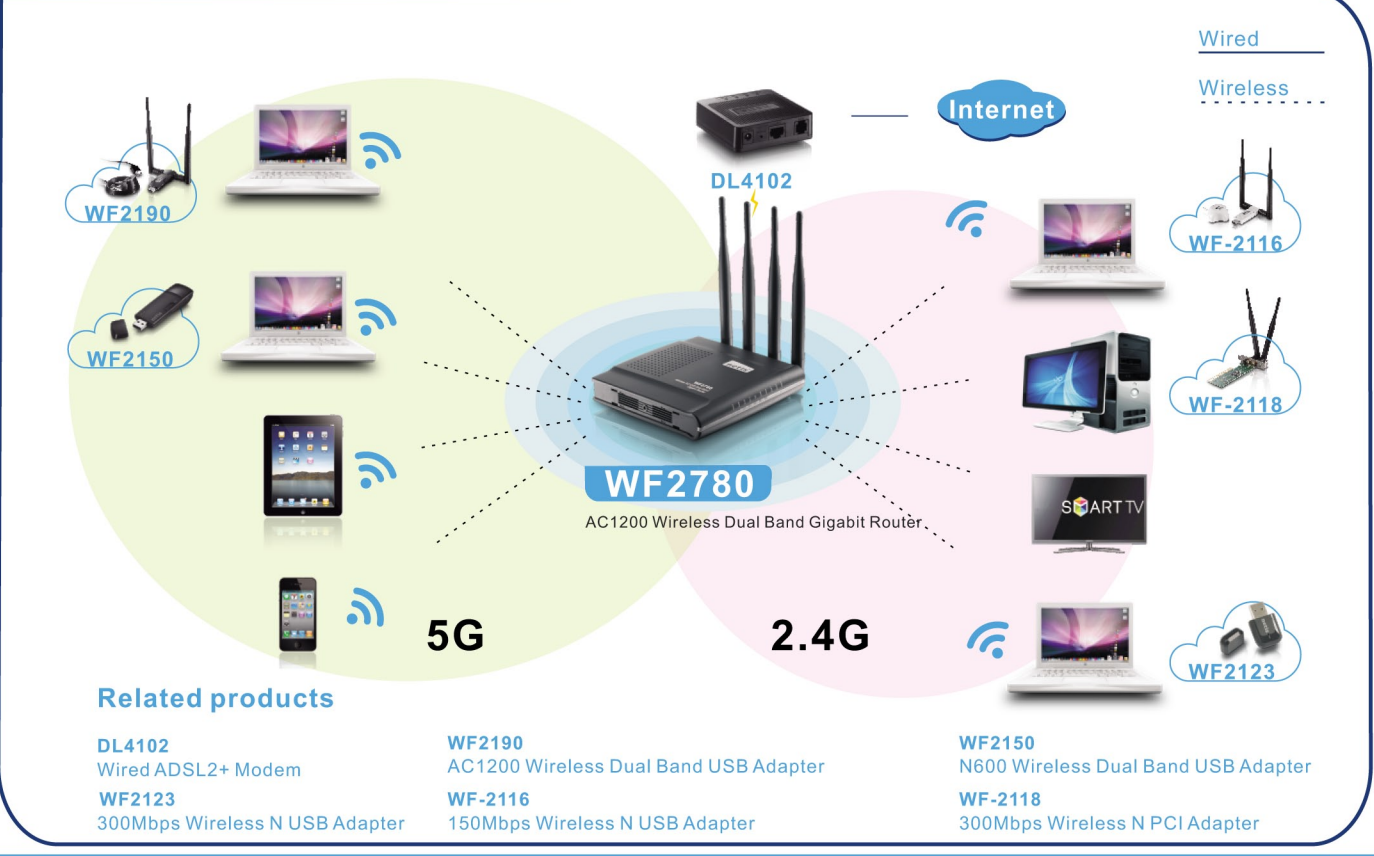

### Related products

- DL4102**  
Wired ADSL2+ Modem
- WF2190**  
AC1200 Wireless Dual Band USB Adapter
- WF2150**  
N600 Wireless Dual Band USB Adapter
- WF2123**  
300Mbps Wireless N USB Adapter
- WF-2116**  
150Mbps Wireless N USB Adapter
- WF-2118**  
300Mbps Wireless N PCI Adapter

Specifications are subject to change without notice, Netis is a registered trademark of Netis Systems Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from Netis Systems Co., Ltd.

[www.netis-systems.com](http://www.netis-systems.com)