



zBoost SOHO Max™ ZB545M

Cell Phone Signal Booster




zBoost, a leader in consumer cell phone signal boosters, offers the new zBoost SOHO Max as the solution to your missed and dropped calls inside your larger home or office space. The innovative zBoost SOHO Max boosts voice coverage on 4G/3G phones for all North American carriers operating on CEL 800 MHz and PCS 1900 MHz frequencies.

The zBoost SOHO Max captures the reliable cellular signal you have outdoors and rebroadcasts it indoors, **up to 3,500 square feet**, so you can enjoy clearer, faster and more reliable service without interruption.

Everything you need is included: amplifier base unit, indoor antenna, power supply, 15 ft. and 35 ft. of RG6 cable, flat window entry cable, external antenna, and mounting hardware.

- High performing dual band signal booster - coverage **up to 3,500 sq. ft.** (up to 69 dB system gain)
- Ideal for homes or offices that have reliable outside signal
- Reduces dropped and missed calls and can provide faster 3G data performance for multiple simultaneous users
- Boosts performance on iPhone™, Samsung™, Android™ and other phones and mobile devices
- Automatically operates at maximum gain – no manual adjustments needed
- Extends phone battery life - phone uses less power when the indoor signal is stronger
- Easier to set up - window entry cable included
- Designed in Silicon Valley – Made in North America

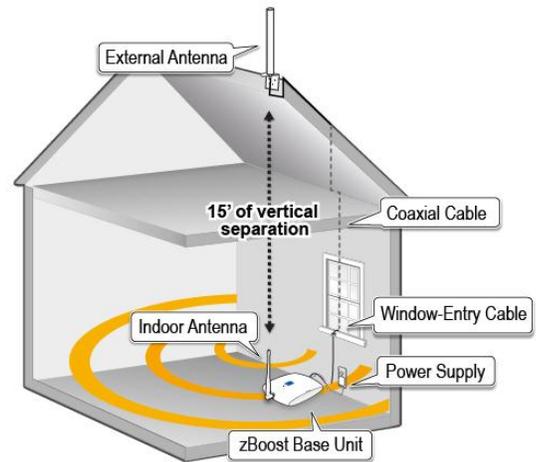

Product Specifications – ZB545M	
PCS	
Frequency	1850 to 1990 MHz
System Gain	69 dB
PCS band supported	A, D, B, E, F, C
Networks	CDMA, GSM, GPRS, EDGE, EVDO, 1xRTT, UMTS, HSPA, 3G
Cellular	
Frequency	824 to 894 MHz
System Gain	63 dB
Cellular band supported	A, B, A', B'
Networks	CDMA, GSM, GPRS, EDGE, EVDO, 1xRTT, UMTS, HSPA, 3G
General	
Power Consumption – Power Supply Current	3W standby; 7W max signal - 2.0A Max
Wall Supply Input; Voltage	100-240VAC 50-60 Hz; 5.0VDC
System Certifications	FCC Parts 15 & 20, Industry Canada
Base Unit Size and Weight	5" x 7" x 1.25" – 9 oz.
Operating Conditions	Indoor Use Only (40°- 105° F)
Coverage (open areas)	Up to 3,500 sq. ft.