

SECURITY CAMERA



SIMPLE INSTALLATION

Connects to a TV, DVR or Security Monitor

WATCH DAY OR NIGHT

Automatic Infrared light filter for accurate color reproduction in all lighting conditions

VERSATILE INSTALLATION

Install indoors or outdoors, on walls or ceilings

FEATURES

- 18 IR LEDs provide night vision range up to 60ft (18m)1
- True day/night operation using built-in IR filter changeable mechanism to
- · achieve accurate color representation in varying lighting conditions
- · Advanced day/night mode: picture automatically switches to B&W delivering better clarity in low light conditions
- Weatherproof design: ideal for outdoor and indoor applications (IP66)²
- · Easy connect to any DVR, observation system, TV or VCR
- · Ceiling or wall mountable





SEE IT ALL



VIEW YOUR WORLD -WITH CLARITY.

- TRUE COLOR IMAGE
- DAY AND NIGHT
- ▼ FLEXIBLE INSTALLATION

ANTI-GLARE COLOR REPRODUCTION Standard With Anti-glare Accurate Colors with Exclusive Infrared Filter Technology




SECURITY CAMERA

PRODUCT INFORMATION

CVC6941:	7-78597-69410-9
Package Weight:	1.14kg / 2.5lbs
Package Dimensions: (W x D x H)	299mm/11.8" (w) x 83mm/3.3" (d) x 197mm/7.8 (h)
Package Cube:	0.17 Cbf / 0.005 Cbm
Contents:	1 x Camera with stand, 1 x BNC Female/RCA Male Adapter, 1 x 60ft BNC/Power Extension Cable, 1 x 12V DC Power Adapter

DIMENSIONS



SPECIFICATIONS

1/4" Color Image Sensor Image Sensor:

NTSC Video Format:

Effective Pixels: H: 640, V: 480 Resolution: 420 TV Lines 2:1 Interlace Scan System: Sync System: Internal

S/N Ratio: More than 40dB

AES Iris:

1/30~1/62,500 Sec AES Shutter Speed:

Mini Illumination: 0.6 Lux without IR LED, 0 Lux with IR LED

Composite 1.0Vpp @ 75 ohm Video Output: Lens/ Lens Mount: 3.6m F2.0/Board Type

FOV (Diagonal): 64°

BNC Type Termination:

IR LED/ Night Vision Range: 18 pieces / 850 nm / 60ft

Power Requirement: 12V DC

170 mA or 2W max Power Consumption:


-10° ~ 50° C (14°F ~ 122°F) Operating Temp Range:

Environmental Rating: IP 66

DISCLAIMERS

- 1 IR illumination range of 60ft (18m) under ideal conditions. Objects at or beyond this range
 - or completely obscured, depending on the camera application.
- 2 Not recommended for submersion in water. Installation in a sheltered location recommended.

INSTALLATION DIAGRAM

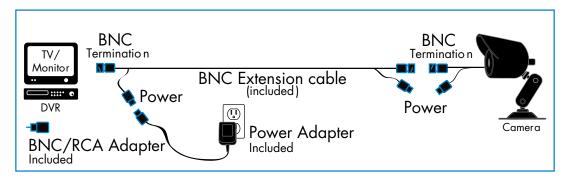



CVC6941

www.lorextechnology.com

Lorex Technology Inc.

250 Royal Crest Court, Markham, Ontario L3R 3S1 Canada.

3700 Koppers Street Baltimore, Maryland 21227,

©2011 Lorex Technology Inc. As our product is subject to continuous improvement, Lorex Technology & subsidiaries reserve the right to modify product design, specifications & prices without notice and without incurring any obligation. E&OE.