


**WDR**




Indoor

## DS-2CD754FWD-E(I) 1080P Vandal Resistant Network Dome Camera

- 1080P Full High Definition
- 2 Megapixel resolution
- H.264/MPEG4/MJPEG Video Compression with high compression ratio
- Progressive scan CMOS
- True Wide Dynamic Range
- Up to 32 GB SD/SDHC card local storage
- Two-way audio
- Conforms to ONVIF and PSIA

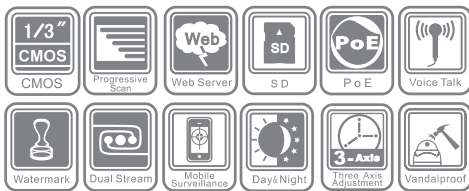

Unit: mm

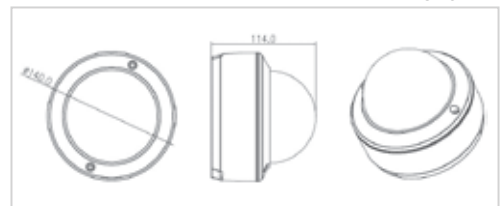

### Specifications

		DS-2CD754FWD-E	DS-2CD754FWD-EI	
Camera	Image Sensor	1/3" Progressive Scan CMOS		
	Min. Illumination	0.1 Lux @ (F1.6, AGC ON) DS-2CD754FWD-EI: 0.1 Lux @ (F1.6, AGC ON), 0 Lux with IR		
	Shutter Time	1/25 s to 1/100,000 s		
	Lens	2.7 - 9 mm @ F1.2, Angle of view: 101° - 30.4°		
	Lens Mount	Φ14		
	Auto Iris	DC drive		
	Angle Adjustment	Pan: 0° - 360°, Tilt: 0° - 75°, Rotation: 0° - 360°		
	Day & Night	Electronic	IR cut filter with auto switch	
Compression Standard	Wide Dynamic Range	120DB		
	Video Compression	H.264/MPEG4/MJPEG		
	Bit Rate	32 Kbps - 16 Mbps		
	Audio Compression	G.711		
Image	Dual Stream	Yes		
	Max. Image Resolution	1920 × 1080		
	Frame Rate	60 Hz: 30 fps (1920 × 1080), 30 fps (1280 × 720)		
Network	Image Setting	Saturation, Brightness, Contrast adjustable through client software or web browser		
	Local Storage	Built-in SD/SDHC slot, up to 32 GB		
	Alarm Trigger	Motion detection, Network disconnect, IP address conflict, Storage exception		
	Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, PPPoE, SMTP, NTP		
Interface	Security	Password protection, Watermark		
	System Compatibility	ONVIF, PSIA, CGI		
	Audio Input	1-ch microphone input, 3.5 mm mini-jack		
	Audio Output	1-ch 3.5 mm audio interface (Line level, 600 Ω)		
General	Communication Interface	1 RJ45 10 M/100 M Ethernet port and 1 RS-485 interface		
	Alarm Input	2		
	Alarm Output	2		
	Video Output	1Vp-p composite output (75 Ω/BNC)		
	Reset Button	Yes		
	Power Supply	12 V DC ± 10%; PoE (802.3af)		
	Power Consumption	Max. 5.5 W	Max. 7.5 W	
General	Impact Protection	IEC60068-275Eh, 50J; EN50102, up to IK10		
	IR Range	-	Up to 60 feet	
	Dimension (Dia.xH)	Φ 140 × 114 mm (Φ 5.51" × 4.49")		
	Weight	1400 g (3.09 lbs)		

### Accessories

DS-1227ZJ (Flush Mount), DS-1229ZJ (Wall Mount)