

# INTRODUCING PANASONIC HEALTHCARE GRADE LRH30 SERIES 32-INCH LCD FOR PATIENT ROOM USE



## MAIN FEATURES

- ▶ Professional LCD with pillow speaker interface with the ability to easily turn on/off TV speakers
- ▶ Healthcare grade display with UL 60065 Annex Q certification for patient rooms, lobbies, waiting rooms and many other healthcare environments
- ▶ Pro:Idiom® compatibility eliminates need for separate set-top box and allows system-wide cloning from a single location
- ▶ Integrated *b*-LAN™ supporting LodgeNet HD Video on Demand (other VOD providers supported via MTI)
- ▶ Concierge Warranty Program provides on-site service & support for extreme customer satisfaction
- ▶ Lower Total Cost of Ownership (TCO) results from extremely low failure rates, a very long lifecycle and superior reliability



**32"**  
Class 720p LCD HDTV  
TH-32LRH30U

**Panasonic Solutions Company**



## DESIGNED TO MEET HEALTHCARE FACILITY NEEDS

The LRH30 Series TH-32LRH30U is a Professional Healthcare-Grade 32-inch LCD HDTV built for patient room, lobby and waiting room use in hospitals, medical care centers, nursing homes and other healthcare facilities in accordance with UL 60065 Annex Q Safety Requirements. Features include space-saving design, built-in tri-band tuners, hidden speakers and energy-saving efficiency, along with Panasonic's reputation for high production quality and low maintenance and repair rates.

## PROFESSIONAL FEATURES FOR HEALTHCARE

Weighing just 21lbs. with a depth of 3.3 inches, TH-32LRH30U is easily wall mounted and provides patients and visitors with a flat screen, high definition viewing experience. The display's SD card slot allows viewing of digital camera images saved on SD Memory Cards, so visitors and medical personnel can easily share pictures.




## FULLY COMPATIBLE WITH PILLOW SPEAKER

A 1/8-inch M3 terminal jack for a pillow speaker is located on the connector panel. The TH-32LRH30U is compatible with virtually any pillow speaker on the market.



## SYSTEM CONFIGURATION

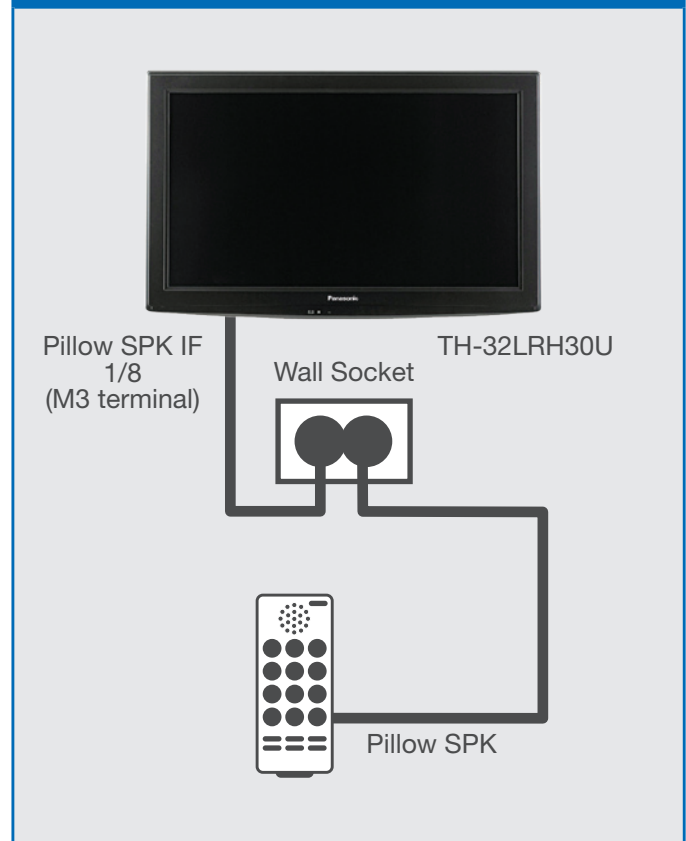

For more information, contact the Healthcare Display Solutions Team:

Brian Simmons  
Area Sales Manager  
201.427.0625  
Brian.Simmons@us.panasonic.com

Andy Fogelgren  
Area Sales Manager  
201.427.0613  
Andy.Fogelgren@us.panasonic.com

### TH-LRH30U SPECIFICATIONS

Screen Size	31.5-inch
Aspect Ratio	16:9
Panel	LCD CCFL
Number of Pixels (HxV)	1,366 x 768 pixels
Brightness	450 cd/m <sup>2</sup>
Contrast Ratio	18,000:1
Viewing Angle	178 degrees
Response Time	7 ms (G to G)
Receiving System	ATSC/QAM/NTSC (MPEG2, MPEG4/H.264 support)
Pro:Idiom	Integrated b-LAN
Cloning	Yes (SD)
PILLOW SPK IF	Yes (M3)
UL Annex	Q Yes
Interface	Input - HDMI, Composite, Component, PC-In Control - MTI/Game port (RJ11), RS232C (M3) Other - SD card slot (cloning, image viewer)
Bezel Color	Matte Black
Speaker	10 W + 10 W (10% THD) 1 Way 2 Bottom Speaker
Power Requirements	110 - 127 V AC, 60 Hz
Power Consumption	TBD (ENERGYSTAR 5.3, CEC)
On Mode Average Power Consumption	TBD
Stand-by Condition	TBD
Dimensions	31.5" x 20.2" x 3.3"
Weight	Approx. 21.0 lbs (9.5 kg)
Safety Regulations	UL 60065 Annex Q and UL 6500 Ver 2
Radiation Regulations	FCC Part 15 Class-B, ICES-003

Tentative - Product design and specifications subject to change without notice.