


AMP210 SPECIFICATIONS

- Stereo (8 ohm): 90W RMS per channel at 8 ohms, 20Hz - 20kHz, <0.1% THD+N
- Stereo (4 ohm): 125W per channel at 4 ohms, 20Hz-20kHz, <0.1% THD+N
- Bridged Mono (8 ohm): 250W RMS at 8 ohms, 20Hz - 20kHz, <0.2% THD+N
- Frequency Response: 10Hz - 50kHz, +0dB, -3dB
- Signal to Noise Ratio: 100dB A-weighted, referred to rated power at 4 ohms
- Channel Separation: 69dB @ 1kHz, referred to rated power at 8 ohms
- Sensitivity: Variable, 350mV to 2.8V for rated power at 8 ohms
- AC Power Consumption: 700W maximum
- Net Weight: 24lbs / 10.9kgs
- Gross Weight: 31.7lbs / 14.4kgs

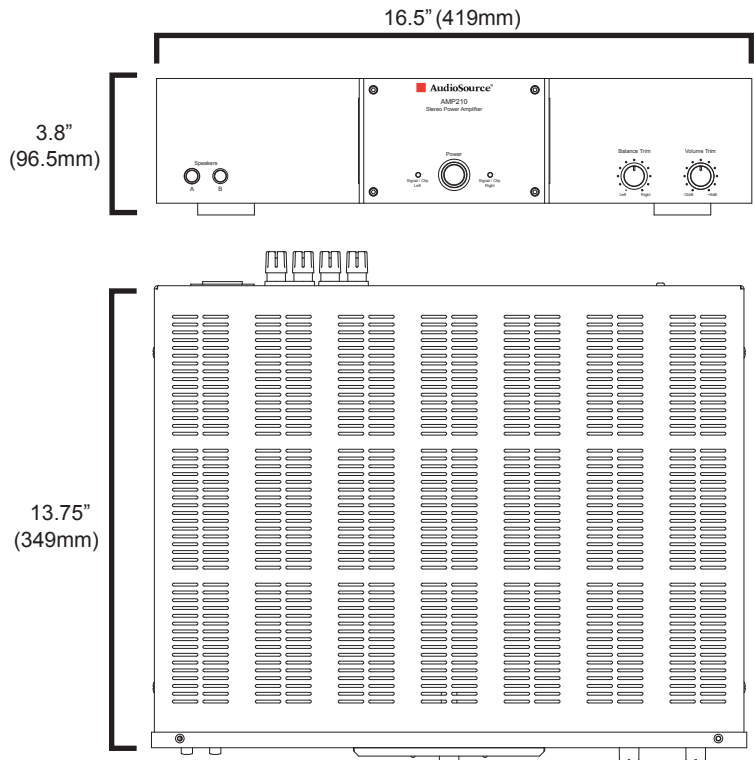

AMP310 SPECIFICATIONS

- Stereo (8 ohm): 150W RMS per channel at 8 ohms, 20Hz - 20kHz, <0.1% THD+N
- Stereo (4 ohm): 225W per channel at 4 ohms, 20Hz-20kHz, <0.1% THD+N
- Bridged Mono (8 ohm): 450W RMS at 8 ohms, 20Hz - 20kHz, <0.1% THD+N
- Frequency Response: 10Hz - 50kHz, +0dB, -3dB
- Signal to Noise Ratio: 100dB A-weighted, referred to rated power at 4 ohms
- Channel Separation: 68dB @ 1kHz, referred to rated power at 8 ohms
- Sensitivity: Variable, 350mV to 2.8V for rated power at 8 ohms
- AC Power Consumption: 1200W maximum
- Net Weight: 33.1lbs / 15.0kgs
- Gross Weight: 41.9lbs / 19.0kgs

