


NOTE:

1. CABLE: 26AWG UL1061 JUMP WIRE.
2. D-SUB 25 PIN FEMALE (DB25S): SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATOR, TIN PLATED SHELL.
3. D-SUB 25 PIN MALE (DB25P): SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATOR, TIN PLATED SHELL WITH GROUND INDENT.
4. MOLDED TOOLING NUMBER: M₂-A25-20*, BIG SIDE MOLDED LOGO "BELKIN"; SMALL SIDE MOLDED P/N LOGO "F4A602".
5. SHIELD: WITH AL-FOIL SHIELD.
6. THUMBSCREW: (o) DB25S: 4.75*17mm (#4-40UNC) SCREW + T-WASHER+HEX NUT: 4.75*1.6mm (#4-40UNC).
(b) DB25P: 4*12.5mm (#4-40UNC) SCREW + T-WASHER.
7. HOOD: MOLDED PVC DARK GRAY.

PIN OUT

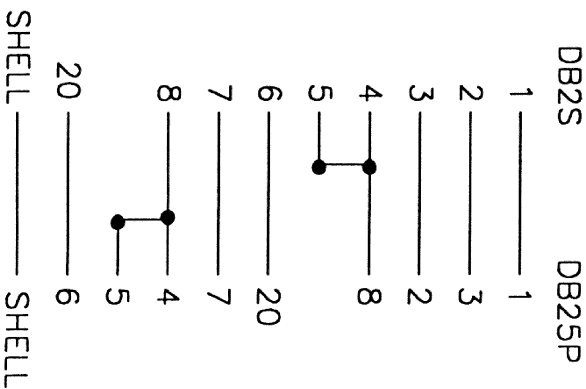

Part # F4A602xXX	NULL MODEM ADAPTER BLOCK
Seq# N/A	DB25M/DB25F; MOLDED BLOCK
Drawn by: WAY	Date: 06-01-900
Approved by: PAW	Date: 06-01-900
Page 1 of 1	Revision A.