

CP825LCD

The CP825LCD UPS system offers full-time surge protection and battery backup.



KEY FEATURES:

- 825VA / 450W Simulated sine wave
- Standby Topology
- Multi-function LCD display
- Compact Desktop Form Factor
- RJ11/RJ45 Protection
- 8 Outlets / USB port
- EMI/RFI filters
- PowerPanel® Personal Edition

Runtimes:

2 Minutes at Full-load
8 Minutes at Half-load

DESIGNED FOR:

- Home Office/Small Office Networks & Equipment
- Workstations/PCs
- Internetworking Hardware
- Home Theater System Equipment
- Surveillance & Security Systems
- Personal Electronics
- POS Systems

The CyberPower Intelligent LCD CP825LCD uninterruptible power supply (UPS) safeguards mid- to high-end computer systems against surges/spikes and offers battery backup in the event of brownouts or blackouts.

The CP825LCD unit has a capacity of 825VA/450Watts, eight (8) NEMA 5-15R receptacles, including four (4) fail-safe outlets for critical loads. The intelligent multi-function LCD panel displays real-time UPS vitals for ease of control. This unit offers connectivity via one (1) HID USB port, as well as protection for phone/network (RJ11/RJ45) and cable/coax (RG-6). It has one (1) maintenance-free, user-replaceable 12V/8.5Ah battery and includes EMI/RFI filters to increase the immunity of the load to disturbances and surges. PowerPanel® Personal Edition UPS Management software automatically closes computer files and safely shuts down the system in case of a power outage.

FEATURES & BENEFITS:

Intelligent LCD Diagnostic Display: The innovative front panel displays 9 different UPS vitals: input voltage level, output voltage level, battery capacity, runtime estimate, load level, on battery, overload, fault condition, and silent mode.

Transformer-Spaced Outlets: Widely-spaced outlets accommodate large transformer-based plugs without compromising the utility of other outlets.

USB Connectivity : HID compliant USB port enables full integration with built-in power management and auto shut-down features of Windows, Linux and Mac OS X.

EMI/RFI Filters: Shielding against electromagnetic interference and radio frequency signals prevents line noise ("humming") over telephone lines or audio systems.

Audible Alarms: Distinctive tones identify when the unit is running on battery power, if it is overloaded or when the battery is low.

Resettable Circuit Breaker: The user may use this convenient unit reset switch in case of an overload.

PowerPanel® Personal Edition: In event of a power outage, PowerPanel PE saves open files and "hibernates" the PC to increase the run-time on the UPS unit. PowerPanel is easily installed on any Windows-based PC and uses minimal system resources. Diagnostic screens display the status of the UPS, including silent operation mode, configurable system notifications, automatic self tests, adjustable high/low voltage warnings, event/data logging, and scheduled shutdowns.

Technical Support: CyberPower assists users with any product, installation, or warranty concerns – free of charge.


3-Year Warranty: Stringent manufacturing processes and innovative product design enables CyberPower to offer one of the strongest warranties in our industry. CyberPower will repair or replace damaged units within three (3) years of purchase date.

ISO and Safety Certifications: All CyberPower manufacturing facilities are state-of-the-art and ISO-9001 Quality Tested. Our products are certified by the FCC, cUL, and UL.

Windows Compatibility: Our PowerPanel® power management software has been fully tested and is compatible with Windows 2000, 2003, XP 32/64, Vista 32/64, 7, and Server 2008.

CP825LCD SPECIFICATIONS

GENERAL	
UPS Topology	Standby
INPUT	
Voltage	100Vac - 140Vac
Frequency	60Hz +/- 3Hz
Plug Type	NEMA 5-15P
Plug Style	Right angle
Cord Length	6'
OUTPUT	
VA	825
Watts	450
On Battery Voltage	120Vac +/- 5%
On Battery Frequency	60Hz
On Battery Waveform	Simulated Sine Wave
Outlets-Total	8
Outlet Type	NEMA 5-15R
Outlets - Battery & Surge Protected	4
Outlets - Surge-Only Protected	4
Outlets - Widely Spaced	4
BATTERY	
Runtime at Half Load (min.)	8
Runtime at Full Load (min.)	2
Battery Type	Sealed lead acid
Battery Size	12V/8.5AH
User Replaceable	Yes
Typical Recharge Time	8 Hours
Replacement Battery	BB Battery - HR1234W
Battery Quantity	1
SURGE PROTECTION & FILTERING	
Surge Suppression	1,030 Joules
Phone / Ethernet RJ11 / RJ45	1-In, 1-Out (Combo)
EMI/RFI Filtration	Yes
MANAGEMENT & COMMUNICATIONS	
Multifunction LCD Display	Yes
HID Compliant USB Port	Yes
Serial Port	No
Management Cable	USB cable
LED Indicators	Power on, wiring fault
Audible Alarms	On battery, low battery, overload
Software	PowerPanel® Personal Edition
PHYSICAL	
Dimensions (WxHxD)	11" x 6.5" x 3.5"
Weight (lbs.)	15
CERTIFICATIONS	
Certifications	UL1778, cUL 107.1, FCC DOC Class B
RoHS Compliant	Yes
WARRANTY	
Product Warranty	3 Years Limited
Connected Equipment Guarantee	Lifetime
CEG Amount	\$225,000

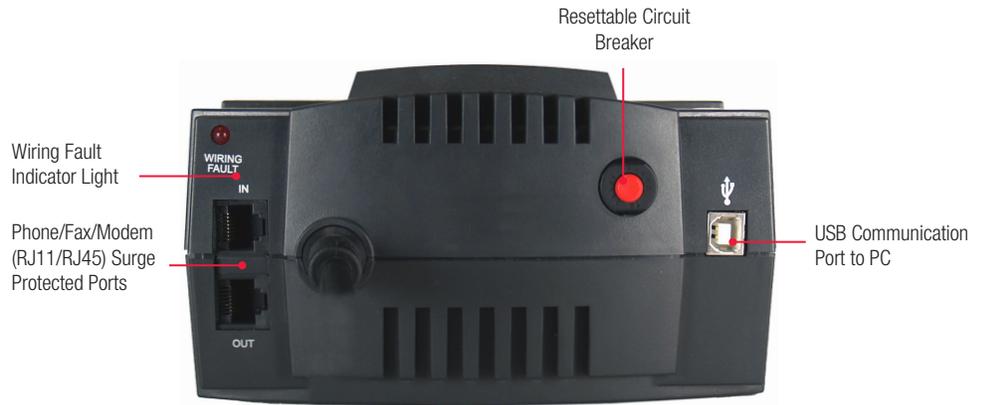

CyberPower Systems, Inc. designs and manufactures state-of-the-art power protection and distribution equipment for corporate, business, home, government and educational markets. CyberPower leads the industry by surpassing customer expectations in the development, design, construction, durability and functionality of uninterruptible power supply (UPS) products for computers, peripherals and connected devices. CyberPower Systems operates in the Asian Pacific, North American, and European markets. For additional information, including sales office locations and authorized reseller partners, visit CPSwww.com.

© 2011 CyberPower Systems (USA), Inc. All rights reserved. All other trademarks are the property of their respective owners. CyberPower reserves the right to modify product information or specifications without previous notice. The information presented is accurate at the time of publication. 11-2011