


Overview

The HP 366M is a HP BladeSystem c-Class network adapter providing four Gigabit Ethernet ports on a single card saving valuable server mezzanine slots for other purposes. The x4 PCI Express 366M is supported on ProLiant c-Class servers in all mezzanine slots. For Gen8 ProLiant c-Class servers, the 366M is the first quad-port adapter option for c-Class with latest Intel® Ethernet I350 controller. With the 366M, up to 96 Gigabit Ethernet ports per c7000 enclosure and 48 per c3000 enclosure are possible.

The four ports provide the highest port density available for BladeSystem servers in a single adapter. The 366M is ideal for virtualization, security, server consolidation, network segmentation, and other server applications requiring maximum throughput and port density in a 1 GbE infrastructure. The total aggregate throughput of 8Gbps full duplex also meets the needs for customers desiring high bandwidth but are not yet ready to move to 10 Gigabit Ethernet.

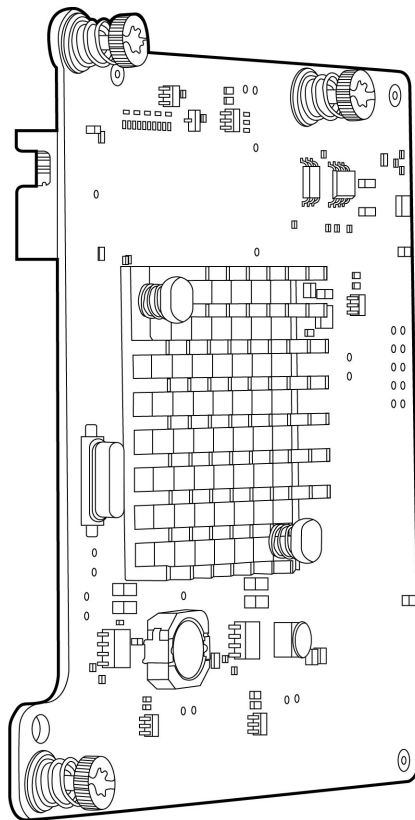

HP Ethernet 1Gb 4-port 366M Adapter

Models

HP Ethernet 1Gb 4-port 366M Adapter

615729-B21

Kit contents

- HP Ethernet 1Gb 4-port 366M Adapter
- Quick install card
- Product warranty statement
- Drivers, user guide, and utilities via <http://www.hp.com>

Compatibility

HP ProLiant Server Support

- HP ProLiant BL465c Gen8
- HP ProLiant BL460c Gen8
- HP ProLiant BL420c Gen8
- HP ProLiant BL660c Gen8

Standard Features

Product Features

- Four Gigabit Ethernet ports
- Supported on ProLiant Gen8 servers in all c-class enclosures, all server mezzanine slots (Mezzanine slot1 supports 2 ports & Mezzanine slot2 supports 4 ports); multiple cards per server.
- Intel® Ethernet I350 controllers
- Designed with server needs in mind:
 - IEEE 802.1p, 802.1Q, 802.3, 802.3ad, and 802.3x
 - ProLiant Teaming including Network Fault Tolerance, Transmit Load Balancing, and Switch-Assisted Load Balancing
 - 9.5K Jumbo frames
 - Interrupt/DMA Coalescing
 - IEEE 1588 (Precision Time Stamping) & 802.1AS (Hardware enabled Time Synchronization)
 - TCP/IP checksum offload (TCO) and large send offload (LSO)
 - PXE
 - Intel® Integrated I/O and Data Direct I/O for increased performance and reduced latency
 - Virtualization with VMDq
- IPv6 packet transmit and receive (excluding all offload capabilities); IPv6 aware SNMPv1 agent for Windows

Quad-port Gigabit Ethernet Throughput

Up to 1000 Mbps full duplex Ethernet transfer rate per port (4000 Mbps combined) delivers outstanding network performance designed to improve response time and remove bottlenecks across the entire network. Four ports on a single adapter are ideal for high density; I/O slot constrained blade servers, virtualization and security, applications, server consolidation, and increased network segmentation. The total aggregate throughput of 8Gbps full duplex also meets the needs for customers desiring high bandwidth but are not yet ready to move to 10 Gigabit Ethernet.

Jumbo Frames

The 366M support for 9.5K jumbo frames (also known as extended frames) permit a 9.5K byte transmission unit (MTU), which is approximately six times the size of standard 1500 byte Ethernet frame. The 366M supports jumbo frames as a way to achieve higher throughput and better CPU utilization. Jumbo frames are particularly useful for database transfers and tape backups.

802.1Q VLANs with 802.1p QoS Tagging

IEEE 802.1Q virtual local area network (VLAN) protocol allows each physical port of the 366M to be separated into multiple virtual NICs for added network segmentation and enhanced security and performance. VLANs increase security by isolating traffic between users. Limiting the broadcast traffic to within the same VLAN domain also improves performance. IEEE quality of service (QoS) 802.1p tagging allows the adapter to mark or tag frames with a priority level across a QoS-aware network for improved traffic flow.

TCP/IP Stateless Offloading

For overall improved system response, the 366M supports standard TCP/IP offloading techniques including:

- TCP/IP checksum offload (TCO) moves the TCP and IP checksum offloading from the CPU to the network adapter.

Large send offload (LSO) or TCP segmentation offload (TSO) allows the TCP segmentation to be handled by the adapter rather than the CPU.

Interrupt Coalescence

Interrupt coalescing (interrupt moderation) groups multiple packets, thereby reducing the number of interrupts sent to the host. This process optimizes host efficiency, leaving the CPU available for other duties.

DMA Coalescing

Supports DMA Coalescing, the incoming data packets and interrupts associated with these DMA calls are intelligently batched to keep the system devices in lower power states.

Standard Features

Intel® Integrated I/O with Data Direct I/O	New on HP ProLiant Gen8 servers, Intel® Integrated I/O features reduces memory access from I/O on local socket which speeds up CPU data transfer and accelerates inbound and outbound traffic flows. Together, Integrated I/O and Data Direct I/O technologies reduce system power, increases I/O performance and reduced I/O latency.
Optimized for Virtualization	I/O Virtualization support for VMware NetQueue, Microsoft VMQ and Intel's Virtualization Machine Device Queues (VMDq) help meet the performance demands of consolidated virtual workloads. Compliant with Single-Root I/O Virtualization (SR-IOV), accommodating multiple Virtual Machines (VMs) to share single PCIe resources. The device is capable of SR-IOV, and requires Firmware, Software and OS support
IEEE1588 & 802.1AS	Support hardware-enabled IEEE 1588, a standard that defines PTP (Precision Time Protocol), a high-precision time protocol for clock synchronization used in measurement and control systems.
HP Sea of Sensors 3D	Support for HP Sea of Sensors 3D Technology which is a collection of 32 sensors that automatically track thermal activity - heat - across the server. When temperatures get too high, sensors can kick on fans and make other adjustments to reduce energy usage. What makes it better is the upgrade from all six fans kicking on at one time to a new system where only one kicks on - the one in proximity of the area that started heating up - thus reducing the amount of energy used for cooling.
PXE Boot	Support for pre-boot execution environment (PXE) enables automatic deployment of computing resources remotely from anywhere. It allows a new or existing server to boot over the network and download software, including the operating system, from a management/ deployment server at another location on the network. Additionally, PXE enables decentralized software distribution and remote troubleshooting and repairs.

High Availability

Quad port	The four ports on the 366M are transmitted to up to four separate enclosure interconnect bays providing redundant signal paths.
Redundant adapters	With multiple quad port adapters supported per server connected to up to two redundant pairs of interconnect modules per enclosure, a very wide variety of high availability I/O configurations are possible.
ProLiant Network Adapter Teaming	ProLiant Network Adapter Teaming provides fault tolerance and load balancing across a team of two or more network adapters. The team of adapters works together as a single virtual adapter. Support for several different types of teaming is included. Teaming offers IT professionals an easy, efficient, and cost-effective way to provide network fault tolerance and increased network bandwidth. For more information, refer to the ProLiant Network Adapter Teaming Whitepaper available at http://bizsupport.austin.hp.com/bc/docs/support/SupportManual/c01415139/c01415139.pdf

Warranty

HP branded hardware options qualified for BladeSystem c-Class and p-Class servers are covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners. The HP branded hardware option diagnostic support and repair is available for one year from date of purchase, or the length of the server they are attached to, whichever is greater. Support for software and initial setup is available for 90 days from date of purchase. Additional support may be covered under the warranty or available for an additional fee. Enhancements to warranty services are available through HP Care Pack services or customized service agreements.

Additional information regarding worldwide limited warranty and technical support is available at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>.

Service and Support

Service and Support

HP Care Pack Services: Packaged server and storage services for increased uptime, productivity and ROI

When you buy HP server and storage products and solutions, it's also a good time to think about what levels of support you may need. Our portfolio of service options reduce deployment and management worries while helping you get the most out of your server and storage investments. We take a holistic approach to your environment, bridging servers, blades, storage, software and network infrastructures with our packaged HP Care Pack Services for servers and storage.

Protect your business beyond warranty

When it comes to robustness and reliability, standard computing equipment warranties have matured along with technology. Good news that can also create problems stemming from depending on standard warranties designed to only protect against product defects and some downtime causes. Using a standard approach to warranty uplifts, such as HP Care Pack Services, helps reduce downtime risks and provides operational consistency for mission-critical and standard business computing.

HP Care Pack Services: Upgrading or extending standard server and storage warranties cost effectively

HP recommends Proactive Care for your BladeSystem servers, enclosures and components to prevent problems with proactive advice and assistance, resolve issues and rapidly recover by connecting to HP's enhanced call experience and advanced technical expertise. In addition with HP Proactive Select, you can acquire the specific proactive constancy and technical services. HP Proactive Select menu offers a broad set of service options that you can mix and match depending on your specific requirements. Proactive service options include offers for server, storage, network, SAN device, software, environment, and education services.

HP server and storage lifecycle support services offer a full spectrum of customer care—from technology support to complex migrations to complete managed services. HP Factory Express provides customization, integration and deployment services for turnkey solutions. HP Education Services offer flexible, comprehensive training on to help your IT staff get the most out of your server and storage investments. HP Financial solutions extend innovative financing and cost-effective asset management programs—from purchase to equipment retirement.

Learn more: www.hp.com/services/servers and www.hp.com/services/storage

NOTE: Care Pack Services availability may vary by product and country.

HP Care Pack Services are sold by HP and HP Authorized Service Partners:

- Services for customers purchasing from HP or an enterprise reseller are quoted using HP order configuration tools.
- Customers purchasing from a commercial reseller can find HP Care Pack Services at <http://www.hp.com/go/lookuptool>

Service and Support

eSupport

HP eSupport is a portfolio of technology-based services that assist you with managing your business environment - from the desktop to the data center.

Support Portal

The HP support portal provides one-stop access to the information, tools and services you need to manage the daily operations of your IT environment.

Features include:

- Access to self-solve tools (including search technical knowledge base)
- Efficient logging and tracking of support cases
- Collaboration with other business and IT professionals
- Download of patches and drivers
- Access to diagnostic tools
- Proactive notification of relevant information

Access to certain features of the support portal requires an HP service agreement. To access the support portal, visit: <http://www.hp.com/support>

HP Insight Remote Support software delivers secure remote support for your HP Servers and Storage, 24 X 7, so you can spend less time solving problems and more time focused on your business. You can have your systems remotely monitored for hardware failure using secure technology that's been proven at thousands of companies around the world. In many cases, you can avoid problems before they occur.

Customer Technical Training

In today's cost-conscious business environment, IT professionals, developers, consultants and users face an interesting challenge: how to keep up with the latest technologies and expand important skills while delivering profitable results on current projects. To help address this challenge, HP offers innovative training solutions that help keep you up-to-date on virtualization, server, storage, Insight Control, Citrix, Microsoft® and open source/Linux-related topics-while spending less time away from business-critical activities.

HP Services Awards

HP Technology Services continues to be recognized for service and support excellence by customers, partners, industry organizations and publications around the world. Recent honors and award reflect our services team's dedications, technical expertise, professionalism and uncompromising commitment to customer satisfaction.

Additional Services Information

To learn more on HP ProLiant servers, HP BladeSystem servers and HP storage products, please contact your HP sales representative or HP Authorized Channel Partner. Or visit: www.hp.com/services/proliant or www.hp.com/services/bladesystem or <http://www.hp.com/services/storage>

Related Options

c-Class BladeSystem Interconnect Modules

NOTE: This is a list of supported options. Some may be discontinued.

HP 6125XLG Ethernet Blade Switch	711307-B21
HP 1/10Gb-F Virtual Connect Ethernet Module for c-Class BladeSystem	447047-B21
HP 1:10Gb Ethernet Blade Switch for c-Class BladeSystem	438031-B21
Cisco Catalyst Blade Switch 3020 for HP c-Class BladeSystem	410916-B21
Cisco Catalyst 1GbE 3120G Blade Switch	451438-B21
Cisco Catalyst 1/10GbE 3120X Blade Switch	451439-B21
HP GbE2c Layer 2/3 Ethernet Blade Switch	438030-B21
HP GbE2c Ethernet Blade Switch for HP c-Class BladeSystem	410917-B21
HP 1GB Ethernet Pass-Thru Module for c-Class BladeSystem	406740-B21
HP 6120XG Blade Switch	516733-B21
HP 6120G/XG Ethernet Blade Switch	498358-B21
HP Cisco B22HP Fabric Extender for BladeSystem c-Class	641146-B21
HP Cisco B22HP Fabric Extender with 16 FET for BladeSystem c-Class	657787-B21

Technical Specifications

General Specifications	Network controller	Intel® Ethernet I350 Controller
	Data rate	Four ports, each at 1000 Mbps full duplex (theoretical maximum) NOTE: The 366M adapter transmits from the server at only 2 Gbps aggregate full duplex per port.
	Bus type	x4 PCI Express 2.1
	Form factor	Type I mezzanine card compatible with all ProLiant c-Class Gen8 servers listed in the Supported Servers section of this QuickSpecs, all mezzanine slots. Multiple cards per server. NOTE: If the 366M is installed in mezzanine slot 1 of a half-height server, connectivity will be provided on only 2 of the 4 ports.
	IEEE Compliance	802.1p, 802.1Q, 802.3, 802.3ad, and 802.3x, IEEE 1588, 802.1AS
Power and Environmental Specifications	Operating	Temperature 50° - 95° F (10° - 35° C) Humidity 10% to 90% non-condensing
	Non-operating	Temperature -40° to 158° F (-40° to 70° C) Humidity 5% to 95% non-condensing
	Power	Maximum Watts 3.1 Watts
	Emissions	FCC Class A
	Agency Approvals	USA FCC (CFR 47 part 15) and UL 60950
	RoHS Compliance	6 of 6
	Safety	UL Mark (USA and Canada) CE Mark EN 60590
	Operating System Support	<ul style="list-style-type: none">● Microsoft Windows Server 2008● Microsoft Windows HPC Server 2008● Red Hat Enterprise Linux 5.7, 6.1● SUSE Linux Enterprise Server● Solaris 10● VMware ESX/ESXi 4.1u2 and ESXi 5.0u1● Citrix XenServer 6.0● Microsoft Windows Hyper-V

NOTE: For more operating system support & certification information, please visit <http://h10018.www1.hp.com/wwsolutions/index.html>.

Technical Specifications

**Environment-friendly
Products and Approach****End-of-life Management
and Recycling**

Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

© Copyright 2014 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Windows is a US registered trademark of Microsoft Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.