
Overview

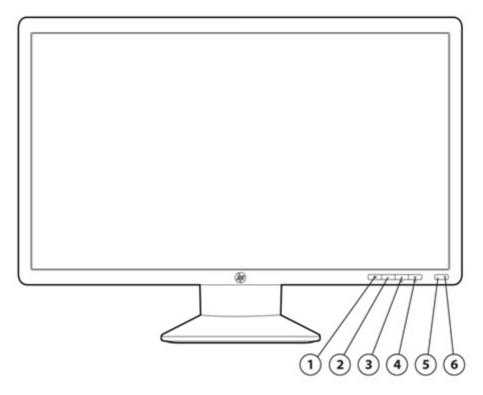

1. Menu

Opens, selects or exits the OSD menu.

2. Minus "-"

If the OSD menu is on, press to navigate backward through the OSD menu and decrease adjustment levels.

3. Plus"+"/Input

If the OSD menu is on, press to navigate forward through the OSD menu and increase adjustment levels.

If the OSD menu is inactive, press to activate the source button that chooses the video signal input (VGA, DVI, or DisplayPort).

4. OK/Auto

5. Power/Power LED


If the OSD menu is on, press to select the highlighted menu item. If the OSD menu is inactive, press to activate the auto adjustment feature to optimize the screen image.

Turns the monitor on or off.

LED:

fully powered = white; sleep mode = amber;

sleep timer mode = flashing amber.




1. Integrated USB 2.0 hub



Overview

Boost Productivity with Dual Monitor Work Solution

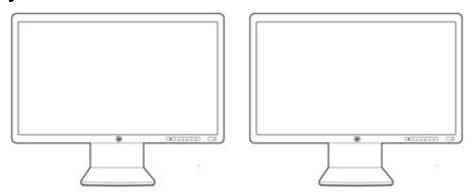

(Multi-monitor support depends on your PC capability. Monitors are sold separately.)

Models

D7Z72AA



Panel	Туре	IPS w/LED backlight
ranei	ıype	IPS W/LED Dackligi

Viewable Image Area

(diagonal)

68,5 cm, (27 in.) widescreen; diagonally measured

Active Area (W x H) **59,8 x 33,6 cm**, (23.5 x 13.3 in.)

Aspect Ratio 16:9

Viewing Angle (typical)* Up to 178° horizontal/178° vertical (10:1 minimum contrast ratio)

Brightness (typical)* 250 cd/m² **Static Contrast Ratio** 1000:1

(typical)*

Dynamic Contrast Ratio 5,000,000:1

(typical)*

Response Time (typical)* 7ms w/overdrive (gray to gray)

Pixel Pitch 0.3114 mm

Backlight Lamp Life 30,000 hours minimum

(to half brightness)*

Color Gamut (typical)* 72%

Color Support** Can display up to 16.7 million colors

*All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

** With the use of FRC technology.

On Screen Display (OSD) Controls

Buttons or Switches Menu, Minus ("-"), Plus ("+") /Input Control, OK/Auto, Power

Languages 10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese,

T-Chinese and S-Chinese)

User Controls Brightness, Contrast, Color, Image Control, OSD control, Management, Language,

Information, Factory Reset, Input Control

Signal Interface/ Performance **Horizontal Frequency** 24 to 94 kHz **Vertical Frequency** 50 to 76 Hz

 Native Resolution
 1920 x 1080 @ 60 Hz

 Preset VESA Graphic
 1680 x 1050 @ 60 Hz

 Modes (non-interlaced)
 1600 x 900 @ 60 Hz

 1440 x 900 @ 60 Hz
 1366 x 768 @ 60 Hz

1280 x 1024 @ 60 Hz 1280 x 800 @60 Hz 1280 x 720 @ 60 Hz 1024 x 768 @ 60 Hz 800 x 600 @ 60 Hz 720 x 400 @ 70 Hz 640 x 480 @ 60Hz

Maximum Pixel Clock

Speed

170 MHz

User Programmable

Modes

Yes (10)



Anti-Glare Yes

Default Color 6500 K

Temperature

Video/Other Inputs Plug and Play Yes

Input Connectors VGA (analog), DVI-D, DisplayPort 1.2 (HDCP support on DVI-D and DisplayPort)

USB Integrated USB 2.0 hub with (2) Downstream and (1) Upstream ports

USB Cable (1)USB cable, 2 m (6.5 ft)
Video Cables (1)VGA, (1)DisplayPort

APJ Specific: (1)VGA and (1)DVI-D cables are included. DisplayPort cable is only

available on limited models and in limited countries.

Video Cable Lengths VGA 1,8 m (5.9 ft); DisplayPort 2 m (6.5 ft)

APJ specific: DVI-D 2 m (6.5 ft) (see APJ specific note above)

Audio N/A
Audio Cable Length N/A
Power Supply Internal

Input Power 100-240V at 50/60Hz

Typical Power 35 W

Consumption

Maximum40 WPower Saving0.5 W

Power Cable Length 1,9 m (6.2 ft.)

Mechanical Dimensions (W \times D \times H) Unpacked w/stand 64,2 x 27,85 x 53,21 cm

(25.28 x 10.96 x 20.95 in)

Unpacked w/o stand

(head only) (25.28 x 2.06 x 15.25 in) **Packaged 70,2** x **17,1** x **60** cm

/on sa s = 0 oo so :

(27.64 x 6.73 x 23.62 in)

64,2 x 5,22 x 38,73 cm

Base area (footprint) 27,85 x 13,07 cm

(10.96 x 5.14 in)

Weight Head Only 4,9 kg (10.8 lb)

 Unpacked
 7,7 kg (16.98 lb)

 Packaged
 10 kg (22.04 lb)

Tilt Range -5° to +30°

Swivel Range Yes, 360°

Height Adjustable Yes, 150 mm

Pivot Rotation Yes, 90°

Base Attached

Environmental Temperature - 5° to 35° C (41° to 95° F)

Operating

Temperature - Non- -20° to 60° C (-4° to 140° F)

operating



Power

Humidity - Operating

20% to 80% non-condensing

Humidity - Non-

5% to 95%, 38.7° C max wet-bulb

operating

Altitude - Operating

0 to 5,000 m (16,404 ft)

Altitude - Non-

0 to 12,192 m (0 to 40,000 ft)

operating

CCFL Panel

White LED Backlight

Yes

Arsenic-Free Display

No

Glass

Yes

Low Halogen⁴

Yes

Mercury- Free Display

Yes

Backlighting

Environmental Data

& Declarations

Eco-Label Certifications This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks

- IT ECO declaration
- US ENERGY STAR®
- TCO 06 and TCO Certified Edge
- EPEAT® Gold where HP registers commercial display products. See http://www.epeat.net for registration status in your country US Federal **Energy Management Program (FEMP)**

Energy Consumption (in accordance with US **Energy Star test**

method)	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation	19.90 W	19.92 W	20.03 W
Sleep	0.64 W	0.64 W	0.65 W
Off	0.23 W	0.25 W	0.23 W

Heat Dissipation*	115VAC, 60 Hz	230VAC, 50 Hz	100VAC, 60 Hz	
Normal Operation	68 BTU/hr	68 BTU/hr	69 BTU/hr	
Sleep	2 BTU/hr	2 BTU/hr	2 BTU/hr	
Off	1 RTII/hr	1 RTII/hr	1 RTII/hr	

^{*} Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see www.epeat.net
- Plastics parts weighing over 25 grams used in the product are marked per



ISO 11469 and ISO1043.

- This product contains 15.2% post-consumer recycled plastic (by wt.)
- This product is 98.5% recycle-able when properly disposed of at end of life.

_					-		
D2	rv	וחב	nπ	M2	iter	בוי	ıc
	ıLN	auı	шч	1-10	ıccı	ıa	

External:	PAPER/Corrugated	1440g	
Internal:	PLASTIC/EPS (Expanded	302.4g	

Polystyrene)

PLASTIC/EPE-Expanded

Polyethylene

PLASTIC/Polyester 7.5g

23g

RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at: http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:



HP EliteDisplay E271i 27-inch IPS LED Backlit Monitor

Technical Specifications

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office.

Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard Corporate **Environmental** Information

For more information about HP's commitment to the environment:

Global Citizenship Report

http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html

Eco-label certifications

http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/

ecolabels.html

ISO 14001 certificates:

http://www.hp.com/hpinfo/globalcitizenship/environment/operations/

envmanagement.html

Options (sold separately)

HP LCD Monitor Quick Release - Part number EM870AA¹

An easy-to-use, VESA-compliant, LCD monitor mounting solution that allows you to quickly and securely attach an LCD monitor to a variety of stands, brackets, arms or wall mounts. For more information, refer to this product's QuickSpecs document.

HP USB Graphics Adapter-Part number NL571AA

Enables connection of up to six simultaneous displays to help you boost productivity and multi-task across several open applications. Use one Adapter to bridge between a notebook or desktop PC and second monitor or use multiple Adapters to connect several displays to each other.

Lock Kit-Part number PV606AA

HP Business PC Security Attaches to the rear of the PC with a six-foot steel cable that can be used to secure a PC or peripherals such as mice, keyboards, monitors or USB security devices to protect them against unauthorized removal by physically connecting the system to an anchor point.

HP LCD Speaker Bar -Part number NQ576AA Powered directly by the connected PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and dual external headphone jacks. Sold separately. For more information, refer to the product's QuickSpecs.

HP DVI to DVI cable – Part number DC198A

Connect to external monitors with a DVI connector from an HP Compaq Business Desktop computer with a DVI connector. The cable is a single link cable with DVI-D support on both connectors. The cable will connect to either a DVI-D or DVI-I

connector on the monitor and the graphics card.

What's in the box?

Monitor and Accessories HP EliteDisplay E271i 27-inch IPS LED Backlit Monitor; VGA cable; DisplayPort

cable; USB cable; AC Power cable.

APJ Specific: (1)VGA and (1)DVI-D cables are included. DisplayPort cable is only

available on limited models and in limited countries.

Documentation Printed documentation and CD

Featured Software Yes, HP Display Assistant

User Guide Languages English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French,

German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish,

Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.

Warranty Languages English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French,

German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish,

Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish. Color Black

VESA External Mounting Yes (one set of standard 4-hole pattern, 100 mm)

Security Lock-Ready Yes **Country of Origin** China

Certification and Compliance

Other

CE, CB, KC, KCC, NOM, PSB, ICE, TUV-S, CCC, CEL Grade 1, CECP, SEPA, TCO Certified Edge, EPA, ISC, VCCI, FCC,

Taiwan: BSMI, ENERGY STAR®, EPEAT® Gold³

Compatibility

Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.

Protected by HP, including a 3 year standard limited warranty. Optional Care Pack Services are extended service contracts which go beyond your standard warranties.²

Service and Warranty

HP EliteDisplay E271i 27-inch IPS LED Backlit Monitor

Technical Specifications

© Copyright 2013 Hewlett-Packard Development Company, L.P.

ENERGY STAR® is a US registered mark of the United States Environmental Protection Agency.

¹The HP Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) for all devices mounted. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads.

² HP Care Pack Services extend service contracts beyond the standard warranties. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at http://www.hp.com/go/lookuptool. Additional HP Care Pack Services information by product is available at http://www.hp.com/hps/carepack.

³ EPEAT® Gold registered models of this product are available where HP registers commercial display products. See www.epeat.net for registration status in your country.

⁴ External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.

All specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

