



8-Port MiniView™ Ultra KVM Switch (GCS138)
8-Port PS/2 KVM with On Screen Display



Model # GCS138

Description

Your business is growing faster than you expected and four computers simply aren't enough to meet your needs? Not a problem. IOGEAR's new 8-port MiniView™ Ultra is just the tool you need to help reduce the need for redundant hardware. Eight monitors, mice and keyboards are simply too expensive, bulky and downright inconvenient for most system administrators. Why bother when you can control all eight, or even up to 512 computers with a single keyboard, monitor and mouse. Just think of the time, space and money you'll save.


But our MiniView™ Ultra is much more than a simple 8-port KVM switch. Built-in AutoScan mode lets you conveniently monitor every attached computer for a specified amount of time, while our On Screen Display technology allows you to assign a unique name to each computer and access it via a slick, menu-driven interface. With its 1U, 19" rack-mountable casing and status-monitoring LEDs, the MiniView™ Ultra is the perfect switch for your server room or any other multi-computer environment.

Features

- Use one keyboard, monitor and mouse to control 8 computers
- Control up to 512 computers by connecting multiple GCS138s together
- On Screen Display provides a convenient method for accessing the computers
- Slashes costs and space consumed by redundant keyboards, monitors, and mice
- Connected computers can be added or removed from the setup without disturbing the other computers
- Keyboard/mouse translation allows PS/2 peripherals to control both PS/2 and serial-based computers
- Plug-n-Play monitor support. High-resolution video support (up to 1920 x 1440)
- Easy to install - no software required
- Built in AutoScan mode
- LEDs allow for easy status monitoring
- Lifetime technical support
- 3 Year Limited Warranty



Function Diagram

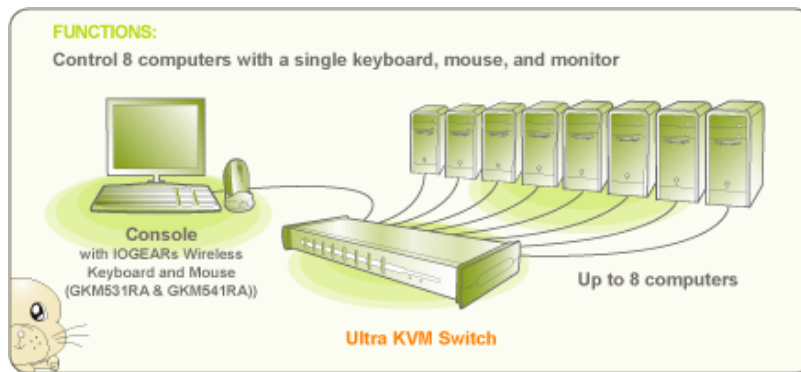

Requirements

- Computers with PS/2 or serial mouse* connections, PS/2 or AT keyboard** connections, and HDDB15 VGA connection

*Additional serial to PS/2 adapter required **Additional AT to PS/2 adapter required

Package Content

- 1 MiniView Ultra™ KVM switch
- 1 power adapter 1 rack mount kit
- 1 installation manual
- 1 quick start guide
- 1 warranty registration card

Warranty 3-YEAR

Specifications

Function	GCS138
Video Resolution	1920x1440; DDC2B
Scan Interval	3, 5, 10, 15, 20, 30, 40, 60 seconds
Port Selection	Push Buttons, Hot Keys, or OSD
Power Consumption	400 mA(Max)
CPU Connectors	
Mouse	8x6 pin mini-DIN Female (PS/2)
Keyboard	8x6 pin mini-DIN Female (PS/2)
Monitor	8xHDDB15 Male
**** Unit Dimensions	
Height	1.75 in. (4.45 cm.)
Depth	6 in. (15.24 cm.)
Width	17 in. (43.18 cm.)
Weight	
Unit Pack Wt.	8.4 lbs. (3.78 kg.)
Unit Wt.	7.8 lbs. (3.51 kg.)
Master Carton Wt.	27.75 lbs. (12.49 kg.)

Housing

Case	Metal
Power	
Amps	3.00 mA(Max)
Voltage	DC 9V
Console Connectors	
Mouse	1x6 pin mini-DIN Female (PS/2)
Keyboard	1x6 pin mini-DIN Female (PS/2)
Monitor	1xHDDB15 Female
LEDs	
On Line	8
Power On	1
Selected	8
Emulation	
Mouse	PS/2, Serial
Keyboard	PS/2, AT
Computer Connections	
Direct	8
Daisy Chain or Cascading	512
*** Unit Package Dimensions	
Height	5.5 in. (13.97 cm.)
Width	22 in. (55.88 cm.)
Depth	9.5 in. (24.13 cm.)
* Master Carton	
Width	18.25 in. (46.355 cm.)
Depth	22.5 in. (57.15 cm.)
* Master Carton Qty.	3
Height	10.5 in. (26.67 cm.)
Power Adaptor Part #	
USA #	# 0AD8-0009-12BG

© 2008 IOGEAR, Inc. All other trademarks belong to the respective owners.

