


LV-KDV2608W1

Smarter Security in 960H Digital Surveillance System

Take Advantage of 960H high resolution recording that brings true wide screen images to your wide screen TV or monitor without being stretched. Experience greater detail 1.3MP cameras to improve the security of your business or home **(2TB Hard Drive Optional)**

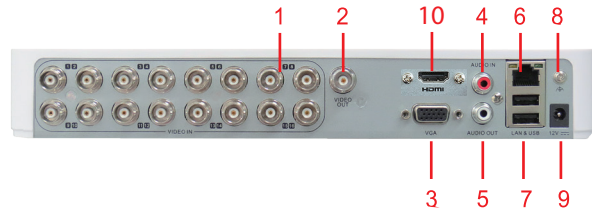

- 1. Video In 4. Audio In, RCA Connector 7. USB Interface 10. HDMI
- 2. Video Out 5. Audio Out, RCA Connector 8. GND
- 3. VGA Interface 6. LAN Network Interface 9. DC 12V

1.3MP IR Bullet Camera

LV-CBA3213	
Camera	
Image Sensor	1/3" sensor
Signal System	NTSC/PAL
Effective Pixels	1280 (H) × 960 (V)
Min. Illumination	0.1 Lux @ (F1.2,AGC ON),0 Lux with IR 0.3 Lux @ (F2.3,AGC ON),0 Lux with IR
Shutter speed	PAL: 1/25 s to 1/10,000 s NTSC: 1/30 s to 1/10,000 s
Lens	3.6 mm @ F2.3 Angle of view: 73 .1°
Lens Mount	M24
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night	ICR
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75Ω/BNC)
S/N Ratio	More than 52 dB
General	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC
Power Consumption	Max. 1.5 W (Max. 4.5 W with IR cut filter on)
Ingress Protection	IP66
IR Range	100ft
Dimensions	Φ70×149.5 mm (Φ2.76"×5.89")
Weight	300 g (0.66 lbs)

MINI 960H DVR

LV-D1116CW	
Video/Audio input	
Video compression	H.264
Video input	16-ch
Video input interface	BNC (1.0 Vp-p, 75 Ω), PAL / NTSC self-adaptive
Audio compression	G.711u
Audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ)
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ) (using the audio input)
Video/Audio output	
VGA output	1-ch, resolution: 1080P: 1920×1080/60Hz; SXGA: 1280×1024/60Hz; 720P: 1280×720/60Hz; XGA: 1024×768/60Hz
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
Encoding resolution	WD1 / 4CIF / 2CIF / CIF / QCIF
Frame rate	25 FPS (P) / 30 FPS (N)
Video bit rate	32Kbps~3072Kbps,or use defined(Max.3072Kbps)
Audio output	1-ch, RCA (Linear, 600Ω)
Audio bit rate	64 Kbps
Dual-stream	Support; Sub-stream @ CIF / QCIF @25 FPS (P) / 30 FPS (N)
HDMI	YES
Synchronous playback	16-ch
Hard disk	
SATA	1 SATA interface
Capacity	Up to 4TB capacity
External interface	
Network interface	1, RJ45 10M / 100M Ethernet interface
USB interface	2 X USB2.0
General	
Power supply	12 VDC
Consumption	≤ 9 W
Working temperature	-10 °C ~ +55 °C
Working humidity	10% ~ 90%
Chassis	Standalone 1U chassis
Dimensions	285 × 210 × 45 mm
Weight	≤ 1.5 kg (without hard disk or DVD-R/W)