



C792e, C792de, C792dte, C792dhe, X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse

Technical Reference

Edition notice

April 2012

The following paragraph does not apply to any country where such provisions are inconsistent with local law: LEXMARK INTERNATIONAL, INC., PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions; therefore, this statement may not apply to you.

This publication could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in later editions. Improvements or changes in the products or the programs described may be made at any time.

References in this publication to products, programs, or services do not imply that the manufacturer intends to make these available in all countries in which it operates. Any reference to a product, program, or service is not intended to state or imply that only that product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any existing intellectual property right may be used instead. Evaluation and verification of operation in conjunction with other products, programs, or services, except those expressly designated by the manufacturer, are the user's responsibility.

For Lexmark technical support, visit <http://support.lexmark.com>.

For information on supplies and downloads, visit www.lexmark.com.

If you don't have access to the Internet, you can contact Lexmark by mail:

Lexmark International, Inc.

Bldg 004-2/CSC

740 New Circle Road NW

Lexington, KY 40550

USA

© 2012 Lexmark International, Inc.

All rights reserved.

Trademarks

Lexmark and Lexmark with diamond design are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Mac and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries.

PCL® is a registered trademark of the Hewlett-Packard Company.

All other trademarks are the property of their respective owners.

GOVERNMENT END USERS

The Software Program and any related documentation are "Commercial Items," as that term is defined in 48 C.F.R. 2.101, "Computer Software" and "Commercial Computer Software Documentation," as such terms are used in 48 C.F.R. 12.212 or 48 C.F.R. 227.7202, as applicable. Consistent with 48 C.F.R. 12.212 or 48 C.F.R. 227.7202-1 through 227.7207-4, as applicable, the Commercial Computer Software and Commercial Software Documentation are licensed to the U.S. Government end users (a) only as Commerical Items and (b) with only those rights as are granted to all other end users pursuant to the terms and conditions herein.

Contents

Edition notice.....	2
Introduction.....	5
Understanding letters after model numbers.....	5
Learning about the printer.....	7
Finding information about the printer.....	7
Printer Control Language (PCL) page formatting.....	9
Printable areas.....	9
Supported paper and envelope dimensions.....	10
Printer Job Language (PJL).....	12
PJL commands information.....	12
PostScript (PS) emulation.....	13
Supported paper sizes.....	13
PostScript paper tray support.....	14
PostScript envelope size support.....	15
PostScript envelope tray support.....	17
Printer specifications.....	19
Airflow requirement.....	19
Noise emission levels.....	19
Electrical specifications.....	20
Power requirements.....	20
Physical specifications.....	21
Clearance requirements.....	22
Environmental conditions.....	22
Altitude and atmospheric pressure specifications.....	23
Appendix A: PCL support.....	25
PCL emulation commands.....	25
GL/2 commands.....	31

Appendix B: PJL support.....	35
Common variables for both printer languages.....	35
Lexmark-unique PJL variables for both printer languages.....	37
Common variables for PCL emulation.....	48
Lexmark-unique variables for PCL emulation.....	48
Common variables for PostScript emulation.....	49
Lexmark-unique variables for PostScript emulation.....	49
Lexmark-unique LRESOURCE variables.....	49
Status Readback commands.....	50
USTATUS unsolicited status variables.....	50
PJL messages for auto-continuable conditions.....	51
PJL messages for attendance conditions.....	58
PJL messages for paper handling.....	76
PJL messages for paper jams.....	81
Service errors.....	87
Device attendance messages.....	88
Lexmark-unique PJL commands.....	88
File and device protection commands.....	89
Appendix C: PostScript support.....	90
Supplemental operators.....	90
Page device parameters.....	93
User interpreter parameters.....	98
System interpreter parameters.....	99
Devices supported.....	101
Device parameters.....	104
PostScript message keys commands.....	113
Index.....	114

Introduction

Overview

This edition of the *Technical Reference* contains information about the following printers or multifunction printers (MFPs):

C792e
C792de
C792dte
C792dhe
X792de
X792dte
X792dtfe
X792dtpe
X792dtme
X792dtse

Understanding letters after model numbers

Some Lexmark™ printers and MFP options may have one or more letters after the model number to indicate features.

Acronym	Meaning
d	duplex ¹
de	duplex and e-Task (electronic task) touch-screen interface
dfe	duplex, finisher/stapler, and e-Task touch-screen interface
dhe	duplex, high-capacity drawer, and e-Task touch-screen interface
dhn	duplex, high-capacity drawer, and network
dme	duplex, mailbox, and e-Task touch-screen interface
dn	duplex and network
dnf	duplex, network, and finisher/stapler
dnw or dw	duplex, network, and wireless
dt	duplex and additional tray ²
dte	duplex, additional tray ² , and e-Task touch-screen interface
dtfe	duplex, additional tray ² , finisher/stapler, and e-Task touch-screen interface
dtme	duplex, additional tray ² , mailbox, and e-Task touch-screen interface
dtn	duplex, additional tray ² , and network
dtpe	duplex, additional tray ² , finisher with hole punch, and e-Task touch-screen interface

¹ Duplex (two-sided) printing using an optional duplex unit or an internal duplex unit based on the product

² The additional tray may be part of a drawer.

Acronym	Meaning
dttn	duplex, tandem tray module, and network
dtse	duplex, additional tray ² , stacker, and e-Task touch-screen interface
dtwe	duplex, additional tray ² , wireless, and e-Task touch-screen interface
e	e-Task touch-screen interface
hdn	hard disk, duplex, and network
n	network
nl	network light model
ni	network and ImageQuick
tn	network and additional tray ²

¹ Duplex (two-sided) printing using an optional duplex unit or an internal duplex unit based on the product

² The additional tray may be part of a drawer.

Learning about the printer

Finding information about the printer

What are you looking for?	Find it here
Initial setup instructions: <ul style="list-style-type: none">• Connecting the printer• Installing the printer software	Setup documentation—The setup documentation came with the printer and is also available on the Lexmark Web site at http://support.lexmark.com .
Additional setup and instructions for using the printer: <ul style="list-style-type: none">• Selecting and storing paper and specialty media• Loading paper• Configuring printer settings• Viewing and printing documents and photos• Setting up and using the printer software• Configuring the printer on a network (depending on your printer model)• Caring for and maintaining the printer• Troubleshooting and solving problems	<i>User's Guide</i> —The <i>User's Guide</i> is available on the <i>Software and Documentation CD</i> . For updates, check our Web site at http://support.lexmark.com .
Instructions for: <ul style="list-style-type: none">• Installing the printer using Guided or Advanced wireless setup• Connecting the printer to an Ethernet or a wireless network• Troubleshooting printer connection problems	<i>Networking Guide</i> —Open the <i>Software and Documentation CD</i> , and then look for <i>Printer and Software Documentation</i> under the <i>Pubs</i> folder. From the list of publications, click the Networking Guide link.
Help using the printer software	Windows or Mac Help—Open a printer software program or application, and then click Help . Click  to view context-sensitive information. Notes: <ul style="list-style-type: none">• Help is automatically installed with the printer software.• The printer software is located in the printer program folder or on the desktop, depending on your operating system.

What are you looking for?	Find it here
<p>Latest supplemental information, updates, and customer support:</p> <ul style="list-style-type: none">• Documentation• Driver downloads• Live chat support• E-mail support• Voice support	<p>Lexmark Support Web site— http://support.lexmark.com</p> <p>Note: Select your country or region, and then select your product to view the appropriate support site.</p> <p>Support telephone numbers and hours of operation for your country or region can be found on the Support Web site or on the printed warranty that came with your printer.</p> <p>Record the following information (located on the store receipt and at the back of the printer), and have it ready when you contact customer support so that they may serve you faster:</p> <ul style="list-style-type: none">• Machine Type number• Serial number• Date purchased• Store where purchased
Warranty information	<p>Warranty information varies by country or region:</p> <ul style="list-style-type: none">• In the US—See the Statement of Limited Warranty included with this printer, or at http://support.lexmark.com.• In other countries and regions—See the printed warranty that came with your printer.


Printer Control Language (PCL) page formatting

For more information on PCL, see the *Printer Languages and Interfaces Technical Reference*. It contains a complete listing with descriptions of PCL commands.

To determine which PCL commands your printer supports, see “Appendix A: PCL support” on page 25.

Printable areas

The printable areas and logical pages for PCL emulation (both portrait and landscape orientation) are illustrated below. See the legend that follows for definitions of areas **A** through **I**.

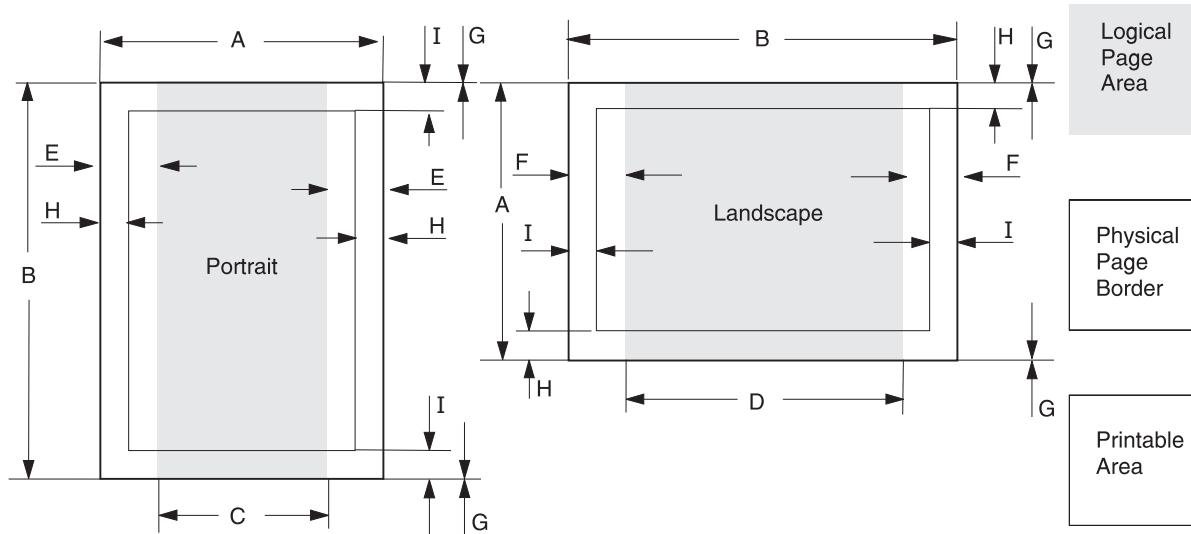

Legend:

A	Portrait physical page width and landscape physical page length
B	Portrait physical page length and landscape physical page width
C	Portrait logical page width
D	Landscape logical page width
E	Distance between the side edge of the physical page and the logical page in portrait
F	Distance between the side edge of the physical page and the logical page in landscape
G	Distance between the top and bottom edge of the physical page and logical page
H	Distance between the left and right edge of the physical page and the printable area in portrait, or distance between the top and bottom edge of the physical page and printable area in landscape
I	Distance between the top and bottom edge of the physical page and the printable area in portrait, or distance between the left and right edge of the physical page and the printable area in landscape

Note: The tables that follow in this chapter list the page sizes and dimensions of each area labeled on the preceding diagram for all paper and envelope sizes your printer supports.

Supported paper and envelope dimensions

The following table lists the page sizes and print area dimensions for all supported paper and envelope sizes. For more information about the printable areas and logical pages for PCL emulation, see “Printable areas” on page 9.

Selection		Paper/envelope dimensions		Dimensions by area (pels) ¹									
Page size parameters ²	Name	mm	inches	A	B	C	D	E	F	G	H	I	
Paper													
2, 602	Letter	216 x 279	8.5 x 11	5100	6600	4800	6360	150	120	0	100	100	
3, 603	Legal	216 x 356	8.5 x 14	5100	8400	4800	8160	150	120	0	100	100	
12, 45, 612	JIS B5	182 x 257	7.2 x 10.1	4300	6070	4000	5830	150	120	0	100	100	
26, 626	A4 (198 mm) ³	210 x 297	8.3 x 11.7	4960	7014	4676	6778	142	118	0	80	100	
26, 626	A4 (203 mm) ³	210 x 297	8.3 x 11.7	4960	7014	4800	6778	80	118	0	80	100	
1, 601	Executive	184 x 267	7.5 x 10.5	4350	6300	4050	6060	150	120	0	100	100	
13, 613	A5	148 x 210	5.8 x 8.27	3496	4960	3196	4720	142	118	0	100	100	
300	Oficio (México)	216 x 340	8.5 x 13.4	5100	8040	4800	7800	150	120	0	100	100	
4 or 10	Folio	216 x 330	8.5 x 13	5100	7800	4800	7560	150	120	0	100	100	
15	Statement	139.7 x 215.9	5.5 x 8.5	3300	5100	3000	4860	150	120	0	100	100	
24	A6	148 x 105	5.8 x 41	2480	3496	2199	3260	142	118	0	100	100	
101	Universal	215.9 x 359.92	8.5 x 14.17	1800–5100 ⁴	1800–8502 ⁴	1500–4800 ⁴	1500–8262 ⁴	150	120	0	100	100	
Envelope													
80	7 3/4 Envelope	98.4 x 190.5	3.875 x 7.5	2324	4500	2024	4260	150	120	0	100	100	
89	9 Envelope	98.4 x 225.4	3.875 x 8.875	2324	5324	2024	5084	150	120	0	100	100	

¹ Pel dimensions are for 600 dpi.

² Page Size Parameters are explained in the Page Control table in the PCL chapter in the *Printer Language and Interfaces Technical Reference*.

³ The width of the logical page for A4 paper can be changed from the printer control panel or your application.

⁴ For the Universal paper size, the area dimensions are listed in pel ranges.

⁵ Paper ID 99 will be supported for backward compatibility with other Lexmark printers. Paper ID 99 has the same logical paper size as ID 100 (compatible with HP LaserJet 5Si/5SiMx) but is 8 pels wider than the Lexmark 4039.

Note: The explanation of the printable area assumes that the Print Area menu item is set to **Normal**. For more information, see “Print Area Menu Item” in the PCL chapter in the *Printer Language and Interfaces Technical Reference*.

Selection		Paper/envelope dimensions		Dimensions by area (pels) ¹								
Page size parameters ²	Name	mm	inches	A	B	C	D	E	F	G	H	I
81	10 Envelope	104.8 x 241.3	4.125 x 9.5	2474	5700	2174	5460	150	120	0	100	100
90	DL Envelope	220 x 110	8.66 x 4.33	2598	5196	2314	4960	142	118	0	100	100
91	C5 Envelope	229 x 162	9.02 x 6.38	3826	5408	3542	5172	142	118	0	100	100
99 ⁵ , 100	B5 envelope	176.0 x 250.0	6.93 x 9.84	4156	5904	3872	5668	142	118	0	100	100
600	Other Envelope	216 x 356	8.5 x 14	7012	8400	4800	8160	150	120	0	100	100

¹ Pel dimensions are for 600 dpi.

² Page Size Parameters are explained in the Page Control table in the PCL chapter in the *Printer Language and Interfaces Technical Reference*.

³ The width of the logical page for A4 paper can be changed from the printer control panel or your application.

⁴ For the Universal paper size, the area dimensions are listed in pel ranges.

⁵ Paper ID 99 will be supported for backward compatibility with other Lexmark printers. Paper ID 99 has the same logical paper size as ID 100 (compatible with HP LaserJet 5Si/5SiMx) but is 8 pels wider than the Lexmark 4039.

Note: The explanation of the printable area assumes that the Print Area menu item is set to **Normal**. For more information, see “Print Area Menu Item” in the PCL chapter in the *Printer Language and Interfaces Technical Reference*.

PJL commands information

Your printer supports complete PJL commands, including certain commands that cause the printer to enter PCL emulation, PostScript emulation, and Personal Printer Data Stream (PPDS).

For a complete listing with descriptions of PJL commands, see the *Printer Languages and Interfaces Technical Reference*.

To determine which commands your printer supports, see “Appendix B: PJL support” on page 35.

PostScript (PS) emulation

Your printer supports complete PostScript emulation supplemental operators. For full, detailed descriptions of these operators, see the PostScript emulation chapter of the *Printer Languages and Interfaces Technical Reference*.

To determine which commands your printer supports, see “Appendix C: PostScript support” on page 90.

Supported paper sizes

✓ = Supported X = Not supported Paper sizes					Printer models	
Size	Literal name	Size (mm)	Size (inches)	Size (points)	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
11 x 17	11x17	279.4 x 431.8	11 x 17	792 x 1224	X	X
17 x 11	ledger	431.8 x 279.4	17 x 11	1224 x 792	X	X
A3	a3	297 x 420	11.7 x 16.54	842 x 1191	X	X
A4	a4	210.0 x 297.0	8.3 x 11.7	595 x 842	✓	✓
A5	a5	148.0 x 210.0	5.83 x 8.27	419 x 595	✓	✓
A6	a6	105.0 x 148.0	4.13 x 5.83	297 x 419	✓	✓
Executive	executivepage	184.2 x 266.7	7.25 x 10.5	522 x 756	✓	✓
Folio	folio	215.9 x 330.2	8.5 x 13.0	612 x 936	✓	✓
JIS B4	b4*	257 x 364	10.12 x 14.33	729 x 1032	X	X
JIS B5	b5*	182.0 x 257.0	7.2 x 10.1	516 x 729	✓	✓
Legal	legal	215.9 x 355.6	8.5 x 14.0	612 x 1008	✓	✓
Letter	letter	215.9 x 279.4	8.5 x 11.0	612 x 792	✓	✓
Oficio	oficio	215.9 x 340.4	8.5 x 13.4	612 x 965 (Lexmark-unique size) 612 x 972 (official PostScript size)	✓	✓
Statement	statement	139.7 x 215.9	5.5 x 8.5	396 x 612	✓	✓
Universal	universal	215.9 x 359.92	8.5 x 14.17	612 x 1020	✓	✓

* This is a Japanese Industry Standard (JIS) paper size. The same named designation is used by JIS and International Organization for Standardization (ISO) for different paper sizes.

PostScript paper tray support

When the printer receives one of the operators listed in “Tray selected with tray operators” on page 14, it performs the actions listed in this section. This paper tray selection process ends when a suitable paper source is chosen and paper is fed from this tray.

- The printer checks the value of **manualfeed** in **statusdict** and the **ManualFeed** page device parameter. If either one is true, then the printer sends a message to load the requested size in the manual feeder or multipurpose feeder.
- The **PageSize Policy** is set to **0** by means of **setpagedevice**.
- The printer checks the paper size loaded in the current active source to determine if it matches the requested size. If the sizes match, then the paper is fed from the active source.

Note: The current active tray is the last source that was selected from the printer control panel or by the printer language.

- If the requested size and the size loaded in the active source do not match, then the sources are searched in the order defined by the **Priority** array in the **InputAttributes** dictionary in the **pagedevice** dictionary.
- If the requested media size is not found by the previous search, then the following search order is used:
 - Tray 1
 - Tray 2
 - Tray 3
 - Multipurpose feeder
 - Tray 4
 - Tray 5
- If the requested size cannot be located in any automatic source, then a **configurationerror** is issued and the job is flushed.

For printers that support automatic duplexing:

- Automatic duplexing is not supported for custom-size paper or for envelopes in the multipurpose feeder. Automatic duplexing is supported from the multipurpose feeder for all other papers.
- If the paper source is changed before the back side of a duplexed page prints, then a blank back page prints, the paper source changes, and the information for the back side of the page is printed on the front side of a page sent from the new paper source.

When these operators are used, it is equivalent to executing the following PostScript emulation sequence:

```
<< /PageSize [x y] /ImagingBBox null /Policies << /PageSize 0>> >>
```

setpagedevice

where **x** **y** are the **PageSize** in points.

Tray selected with tray operators

✓ = Supported X = Not supported		Printer model	
Operator	Tray selected (corresponding image size is set)	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
11x17tray	Tray with 11 x 17-size paper	X	X
a3tray	Tray with A3-size paper	X	X

✓ = Supported X = Not supported		Printer model	
Operator	Tray selected (corresponding image size is set)	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
a4tray	Tray with A4-size paper	✓	✓
a5tray	Tray with A5-size paper	✓	✓
a6tray	Tray with A6-size paper	✓	✓
b4tray	Tray with B4-size paper	X	X
b5tray	Tray with B5-size paper	✓	✓
customtray	Tray with custom-size paper	X	X
executivetray	Tray with executive-size paper	✓	✓
foliotray	Tray with folio-size paper	✓	✓
ledgertray	Tray with ledger-size paper	X	X
legaltray	Tray with legal-size paper	✓	✓
lettertray	Tray with letter-size paper	✓	✓
oficiotray	Tray with oficio-size paper	✓	✓
statementtray	Tray with statement-size paper	✓	✓

PostScript envelope size support

The literal names in “Envelope sizes supported” on page 16 are also supported as operators in **userdict**. These operators change the image size, but do not change the active paper source. Therefore, when these operators are used, part of the image may be clipped.

When these literal names are used as operators, it is equivalent to executing the following PostScript emulation sequence. The following example uses a 3.875 x 7.5 envelope.

```
<</Policies <</PageSize 7>> /PageSize [279 540]>> >>setpagedevice
```

Envelope sizes supported

Envelope sizes					Printer models	
Size name	Literal name	Size (mm)	Size (inches)	Size (points)	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme , X792dtse
7 3/4	3.875x7.5envelope	98.4 x 190.5	3.875 x 7.5	279 x 540	✓	✓
Commercial 9	3.875x8.875envelope	98.4 x 225.4	3.875 x 8.875	279 x 639	✓	✓
Commercial 10	4.125x9.5envelope	104.8 x 241.3	4.125 x 9.5	297 x 684	✓	✓
International B5	176x250envelope	176 x 250	6.93 x 9.84	499 x 708	✓	✓
International C5	162x229envelope	162 x 229	6.38 x 9.02	459 x 649	✓	✓
International DL	110x220envelope	110 x 220	4.33 x 8.66	312 x 624	✓	✓
Other envelope	otherenvelope*	229.11 x 355.6	9.02 x 14	612 x 996	✓	✓

* For other envelopes, the page is formatted to 215.9 x 355.6 mm (8.5 x 14 in.) unless a size is specified by your software program.

Literal names supported

Literal names		Printer models	
Literal name	Compatible literal name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
c5envelope	162x229envelope	✓	✓
com10envelope	4.125x9.5envelope	✓	✓
dlenvelope	110x220envelope	✓	✓
monarcenvelope	3.875x7.5envelope	✓	✓

PostScript envelope tray support

If **manualfeed** in **statusdict** and the **ManualFeed** page device parameter are false when the printer receives one of the **envelopetray** operators listed in “Envelopetray operator selections” on page 17, then the following occurs:

- The printer sets the **PageSize Policy** to **0**.
- The printer checks the active source to see if it matches the requested envelope size. If the sizes match, then the envelope is fed from the active source.

Note: The active source is the last source selected from the printer control panel or data stream.

- If the requested size and the size loaded in the active source do not match, then the sources are searched in the order defined by the **Priority array** in the **InputAttributes** dictionary in the **pagedevice** dictionary.
- If the requested media size is not found by the previous search, then the following search order is used:
 - Envelope feeder
 - Multipurpose feeder
- If the requested size and type are not available from any automatic source, then you are prompted to load the requested envelope size and type in the manual feed source.
- If the size is still not available, then a **configurationerror** is issued, and the print job is flushed.

If **manualfeed** or **ManualFeed** is true, then the printer prompts you to load the requested size manually. If no manual feed exists on the printer, then a **rangecheck** error message is issued.

The envelope tray the printer selects when it receives an **envelopetray** operator is listed in “Envelopetray operator selections” on page 17. These operators are equivalent to executing the following PostScript emulation sequence:

```
<</PageSize [x y] /ImagingBBox null /Policies<</PageSize 0>> >>
setpagedevice
```

where **x y** are the **PageSize** in points.

Envelopetray operator selections

✓ = Supported X = Not supported Tray operators		Printer models	
Operator	Tray selected (corresponding image size is set)	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
110x220envelopetray	Tray with 110 x 220-size envelopes	✓	✓
dlenvelopetray	Tray with 110 x 220-size envelopes	✓	✓
162x229envelopetray	Tray with 162 x 229-size envelopes	✓	✓
c5envelopetray	Tray with 162 x 229-size envelopes	✓	✓
176x250envelopetray	Tray with 176 x 250-size envelopes	✓	✓
b5envelopetray	Tray with 176 x 250-size envelopes	✓	✓
3.875x7.5envelopetray	Tray with 3.875 x 7.5-size envelopes	✓	✓
monarcenvelopetray	Tray with 3.875 x 7.5-size envelopes	✓	✓

Tray operators		Printer models	
Operator	Tray selected (corresponding image size is set)	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
3.875x8.875envelopetray	Tray with 3.875 x 8.875-size envelopes	✓	✓
4.125x9.5envelopetray	Tray with 4.125 x 9.5-size envelopes	✓	✓
com10envelopetray	Tray with 4.125 x 9.5-size envelopes	✓	✓
otherenvelopetray	Tray with other size envelopes	✓	✓

Printer specifications

Airflow requirement

The room should meet ASHRAE 62—1989 standards.

Noise emission levels

The following measurements were made in accordance with ISO 7779 and reported in conformance with ISO 9296.

Status	1-meter average sound pressure, dBA	
	C792	X792
ADF Color Copy	Not applicable	53
ADF Color Scan	Not applicable	54
ADF Mono Copy	Not applicable	53
ADF Mono Scan	Not applicable	54
Idle/Ready	25	27
Printing (simplex)	52	52
Printing (duplex color)	53	53
Printing (duplex mono)	52	52
Quiet Mode Printing (duplex color)	48	48
Quiet Mode Printing (duplex mono)	47	47
Quiet Mode Printing (simplex color)	46	47
Quiet Mode Printing (simplex mono)	46	46

Note: Measurements apply to 300-, 600-, and 1200-dpi printing.

Status	Declared sound power level, bels	
	C792	X792
ADF Mono Scan	Not applicable	7.2
ADF Mono Copy	Not applicable	6.9
ADF Color Scan	Not applicable	7.2
ADF Color Copy	Not applicable	6.9
Idle/Ready	4.1	4.7
Printing (duplex)	6.9	6.9
Printing (simplex color)	6.8	6.8

Note: Measurements apply to 300-, 600-, and 1200-dpi printing.

Status	Declared sound power level, bels	
	C792	X792
Printing (simplex mono)	6.8	6.9
Quiet Mode Printing (duplex color)	6.4	6.4
Quiet Mode Printing (duplex mono)	6.4	6.3
Quiet Mode Printing (simplex)	6.3	6.3

Note: Measurements apply to 300-, 600-, and 1200-dpi printing.

Electrical specifications

Printer model	Electrical specification
C792 SFP low-voltage models	100–127 V at 50–60Hz, nominal 90–139.7 V, extreme
C792 SFP high-voltage models	220–240 V at 50–60Hz, nominal (available only in some countries) 198–259 V, extreme
X792 MFP low-voltage models	100–127 V at 50–60Hz, nominal 90–137 V, extreme
X792 MFP high-voltage models	220–240 V at 50–60Hz, nominal (available only in some countries) 180–259 V, extreme

Warning—Potential Damage: Do not use voltage converters with printers.

Power requirements

The following table specifies the nominal average power requirements for the base configuration, including fuser power.

Printing state	C792	X792
Average power while printing continuously		
One-sided (simplex)	850 W	870 W
Two-sided (duplex)	760 W*	810 W
Average power while idle		
Hibernate mode	0.75 W	0.75 W
Ready mode	50 W	75 W
Sleep mode	10 W	17 W
Average power while copying		
Copy	Not applicable	1000 W
Average power while scanning		
ADF scan	Not applicable	110 W

* Not applicable for the e model

Printing state	C792	X792
Average current while printing		
100 V	12 A	12.9 A
120 V	11 A	11.5 A
230 V	5.5 A	6.0 A
Normal mode	5.02 kWh/wk	6.787 kWh/wk
Eco mode	3.93 kWh/wk	5.252 kWh/wk
Off	0 W	0.0 W
* Not applicable for the e model		

Physical specifications

Printer dimensions (unpackaged)

	Height	Width	Depth	Weight with cartridge (unpackaged)
C792e	515 mm (20.3 in.)	566 mm (22.3 in.)	512 mm (20.2 in.)	50 kg (110 lb)
C792de	515 mm (20.3 in.)	566 mm (22.3 in.)	512 mm (20.2 in.)	50 kg (110 lb)
C792dte	646.74 mm (25.5 in.)	566 mm (22.3 in.)	512 mm (20.2 in.)	59.5 kg (131 lb)
C792dhe	1027.7 mm (40.5 in.)	663 mm (26.1 in.)	657 mm (25.9 in.)	105 kg (231 lb)

Printer dimensions (unpackaged)

	Height	Width	Depth	Weight with cartridge (unpackaged)
X792de	825.5 mm (32.5 in.)	558.8 mm (22 in.)	508 mm (20 in.)	73 kg (161 lb)
X792dte	1204 mm (47.4 in.)	610.9 mm (24.05 in.)	657 mm (25.9 in.)	112 kg (247 lb)
X792dtfe	1204 mm (47.4 in.)	1055.4 mm (41.55 in.)	657 mm (25.9 in.)	128.4 kg (283 lb)
X792dtpe	1204 mm (47.4 in.)	1055.4 mm (41.55 in.)	657 mm (25.9 in.)	129.3 kg (285 lb)
X792dtme	1204 mm (47.4 in.)	1055.4 mm (41.55 in.)	657 mm (25.9 in.)	126.6 kg (279 lb)
X792dtse	1204 mm (47.4 in.)	1055.4 mm (41.55 in.)	657 mm (25.9 in.)	127.5 kg (281 lb)

Dimensions of the C792 and X792 hardware options (unpackaged)

	Height	Width	Depth	Weight
2000-sheet high-capacity feeder	360 mm (14.17 in.)	565 mm (22.24 in.)	512 mm (20.16 in.)	24.04 kg (53 lb)
5-bin mailbox	711.2 mm (28 in.)	863.6 mm (34 in.)	431.8 mm (17 in.)	13.9 kg (30.7 lb)
500-sheet offset stacker	711.2 mm (28 in.)	863.6 mm (34 in.)	431.8 mm (17 in.)	15 kg (33.1 lb)

	Height	Width	Depth	Weight
500-sheet staple finisher	711.2 mm (28 in.)	863.6 mm (34 in.)	431.8 mm (17 in.)	15.9 kg (35.05 lb)
500-sheet staple, hole-punch finisher	711.2 mm (28 in.)	863.6 mm (34 in.)	431.8 mm (17 in.)	16.7 kg (36.8 lb)
550-sheet tray	133 mm (5.24 in.)	565 mm (22.24 in.)	512 mm (20.16 in.)	9.52 kg (21 lb)
Banner media tray (input on printer, 36-inch media setup)	210 mm (8.27 in.)	840 mm (33.07 in.)	290 mm (11.42 in.)	4.5 kg (10 lb)
Banner media tray (input on printer, 48-inch media setup)	210 mm (8.27 in.)	1150 mm (45.28 in.)	290 mm (11.42 in.)	4.5 kg (10 lb)
Banner media tray (output with wire bail, 36-inch media setup)	600 mm (23.62 in.)	610 mm (24.02 in.)	280 mm (11.02 in.)	3.6 kg (8 lb)
Banner media tray (output extended with wire bail, 48-inch media setup)	650 mm (25.59 in.)	740 mm (29.13 in.)	280 mm (11.02 in.)	3.6 kg (8 lb)
Banner media tray mounting bracket	130 mm (5.12 in.)	100 mm (3.94 in.)	290 mm (11.42 in.)	0.225 kg (0.5 lb)
Caster base	109.98 mm (4.33 in.)	662.94 mm (26.1 in.)	657.61 mm (25.89 in.)	26.31 kg (58 lb)
Spacer	133 mm (5.24 in.)	565 mm (22.24 in.)	512 mm (20.16 in.)	6.35 kg (14 lb)

Clearance requirements

Model	Left side	Right side	Front	Rear	Top
C792	241.3 mm (9.5 in.)	101.6 mm (4 in.)	482.6 mm (19 in.)	101.6 mm (4 in.)	152.4 mm (6 in.)
Model	Left side	Right side	Front	Rear	Top
X792	241.3 mm (9.5 in.)	101.6 mm (4 in.)	482.6 mm (19 in.)	101.6 mm (4 in.)	152.4 mm (6 in.)

Environmental conditions

Note: When shipping or storing printers, always pack the printer supplies (such as cartridges and photoconductors) separately.

Printer air temperature ranges

Printer model	Operating value		Shipping and storage value (printer with cartridges)
	Product operating	Product in power-off mode	Packaged
C792	15.6°C to 32.20°C (60°F to 90.0°F)	10.0°C to 43.3°C (50°F to 110°F)	-40°C to 43.3°C (-40°F to 110°F)
X792	15.6°C to 32.20°C (60°F to 90.0°F)	10.0°C to 43.3°C (50°F to 110°F)	-40°C to 43.3°C (-40°F to 110°F)

Values for the printer wet-bulb temperature and the ambient operating environment

Printer model	Operating value		
	Wet-bulb temperature (product operating)	Wet-bulb temperature (product in power-off mode)	Ambient operating environment
C792	22.80°C (73.0°F) maximum	26.70°C (80.10°F) maximum	15.6°C to 32.20°C (60°F to 90.0°F) 8–80% RH
X792	22.80°C (73.0°F) maximum	26.70°C (80.10°F) maximum	15.6°C to 32.20°C (60°F to 90.0°F) 8–80% RH

Printer humidity ranges

Printer model	Operating value	Shipping and storage value	
	Air relative humidity (RH)	Air relative humidity (RH) (unpackaged)	Air relative humidity (RH) (packaged)
C792	8–80%	8–80%	5–95%
X792	8–80%	8–80%	5–95%

Cartridge air temperature ranges

Printer model	Shipping and storage value
	Cartridges (packaged)
C792	-40°C to 43.3°C (-40°F to 110°F)
X792	-40°C to 43.3°C (-40°F to 110°F)

Altitude and atmospheric pressure specifications

Altitude specifications

Altitude (above sea level)		
Printer model	Operating value	Shipping and storage value
C792	0–3048 m (10000 ft)	Less than 10300 m (34000 ft)
X792	0–3048 m (10000 ft)	Less than 10300 m (34000 ft)

Atmospheric pressure specifications

Atmospheric pressure	
Printer model	Operating value
C792	Less than 74.6 kPa
X792	Less than 74.6 kPa

Appendix A: PCL support

PCL emulation commands

\checkmark = Supported \times = Not supported		Printer model	
Command	Function	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Decimal 8	Backspace (BS)	\checkmark	\checkmark
Decimal 9	Horizontal Tab (HT)	\checkmark	\checkmark
Decimal 10	Line Feed (LF)	\checkmark	\checkmark
Decimal 12	Form Feed (FF)	\checkmark	\checkmark
Decimal 13	Carrier Return (CR)	\checkmark	\checkmark
Decimal 14	Select Secondary Font (SO)	\checkmark	\checkmark
Decimal 15	Select Primary Font (SI)	\checkmark	\checkmark
Decimal 32	Space (SP)	\checkmark	\checkmark
ESC E	Printer Reset	\checkmark	\checkmark
ESC Y	Display Functions On	\checkmark	\checkmark
ESC Z	Display Functions Off	\checkmark	\checkmark
ESC z	Print Test Page	\times	\times
ESC &#C	Set Horizontal Cursor Position (Column Number)	\checkmark	\checkmark
ESC &#G	Duplex Page Side Selection	\checkmark	\checkmark
ESC &#H	Set Horizontal Cursor Position (in Decipoints)	\checkmark	\checkmark
ESC &#L	Set Left Margin	\checkmark	\checkmark
ESC &#M	Set Right Margin	\checkmark	\checkmark
ESC &#N	Negative Motion	\times	\times
ESC &#P	Print Direction	\checkmark	\checkmark
ESC &#R	Set Vertical Cursor Position (Row Number)	\checkmark	\checkmark
ESC &#V	Set Vertical Cursor Position (in Decipoints)	\checkmark	\checkmark

✓ = Supported X = Not supported		Printer model	
Command	Function	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
<code>ESC&b#M</code>	Monochrome Print Mode	✓	✓
<code>ESC&b#W[data]</code>	Key / Value Pair	X	X
<code>ESC&c#T</code>	Character Text Path Direction	✓	✓
<code>ESC&d@</code>	Disable Underline	✓	✓
<code>ESC&d#A</code>	Collation - Collated Copies (QTY)	✓	✓
<code>ESC&d#D</code>	Select Underline Type	✓	✓
<code>ESC&f#F</code>	Set Universal Height	✓	✓
<code>ESC&f#G</code>	Set Universal Width	✓	✓
<code>ESC&f#O</code>	Set Universal Feed Direction	✓	✓
<code>ESC&f#W</code>	Set Universal Custom Name	✓	✓
<code>ESC&f#S</code>	Push/Pop Cursor	✓	✓
<code>ESC&f#X</code>	Macro Control	✓	✓
<code>ESC&f#Y</code>	Set Macro ID	✓	✓
<code>ESC&k#G</code>	Set Line Termination	✓	✓
<code>ESC&k#H</code>	Set Horizontal Motion Index (HMI)	✓	✓
<code>ESC&k#S</code>	Select Primary and Secondary Pitch	✓	✓
<code>ESC&k#W</code>	Text Scale Mode	X	X
<code>ESC&l#A</code>	Set Page Size	✓	✓
<code>ESC&l#C</code>	Set Vertical Motion Index (VMI)	✓	✓
<code>ESC&l#D</code>	Set Line Spacing	✓	✓
<code>ESC&l#E</code>	Set Top Margin	✓	✓
<code>ESC&l#F</code>	Set Text Length	✓	✓
<code>ESC&l#G</code>	Set Output Bin	✓	✓
<code>ESC&l#H</code>	Select Paper Feed	✓	✓
<code>ESC&l#L</code>	Skip Perforation	✓	✓
<code>ESC&l#O</code>	Select Orientation	✓	✓

✓ = Supported X = Not supported		Printer model	
Command	Function	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
<code>ESC&#M(b)</code>	Media Type	X	X
<code>ESC&#P</code>	Set Page Length	✓	✓
<code>ESC&#S</code>	Simplex/Duplex	✓	✓
<code>ESC&#1T</code>	Job Separation	X	X
<code>ESC&#U</code>	Left (Long-Edge) Offset Registration	✓	✓
<code>ESC&#X</code>	Set Copy Count	✓	✓
<code>ESC&#Z</code>	Top (Short-Edge) Offset Registration	✓	✓
<code>ESC&n#W [operation] [string id]</code>	Alphanumeric ID	✓	✓
<code>ESC&p#C</code>	Palette Control	✓	✓
<code>ESC&p#I</code>	Palette Control ID	✓	✓
<code>ESC&p#S</code>	Select Palette	✓	✓
<code>ESC&p#X[data]</code>	Transparent Print Data	✓	✓
<code>ESC&r#F</code>	Flush All Pages	✓	✓
<code>ESC&s#C</code>	End-Of-Line Text Wrap	✓	✓
<code>ESC&t#P</code>	Text Parsing Method	✓	✓
<code>ESC&u#D</code>	Unit of Measure	✓	✓
<code>ESC(#</code>	Select Symbol Set	✓	✓
<code>ESC(#X</code>	Select Font by ID	✓	✓
<code>ESC(3@</code>	Select Default Primary Font	✓	✓
<code>ESC(f#W[data]</code>	Define Symbol Set	✓	✓
<code>ESC(s#B</code>	Select Stroke Weight	✓	✓
<code>ESC(s#H</code>	Select Pitch	✓	✓
<code>ESC(s#P</code>	Select Spacing	✓	✓
<code>ESC(s#S</code>	Select Style	✓	✓
<code>ESC(s#T</code>	Select Typeface	✓	✓

✓ = Supported X = Not supported		Printer model	
Command	Function	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
ESC(s#V	Select Point Size	✓	✓
ESC(s#W[data]	Load Character	✓	✓
ESC)#	Secondary Font Symbol Set	X	X
ESC)#X	Select Secondary Download Font (by Font ID)	X	X
ESC)3@	Select Default Secondary Font	✓	✓
ESC)s#B	Secondary Font Stroke Weight	X	X
ESC)s#H	Secondary Font Pitch	X	X
ESC)s#P	Secondary Font Spacing	X	X
ESC)s#S	Secondary Font Style	X	X
ESC)s#T	Secondary Font Typeface Selection	X	X
ESC)s#V	Secondary Font Height (Point Size)	X	X
ESC)s#W[data]	Load Font Header	✓	✓
ESC*b#M	Set Raster Compression Mode	✓	✓
ESC*b#V[data]	Transfer Raster Data (Plane)	✓	✓
ESC*b#W[data]	Transfer Raster Data (Row/Block)	✓	✓
ESC*b#Y	Y Offset	✓	✓
ESC*c#A	Horizontal Rectangle Size (in PCL Units)	✓	✓
ESC*c#B	Vertical Rectangle Size (in PCL Units)	✓	✓
ESC*c#D	Set Font ID	✓	✓
ESC*c#E	Set Character Code	✓	✓
ESC*c#F	Font Control	✓	✓
ESC*c#G	Area Fill ID	✓	✓
ESC*c#H	Horizontal Rectangle Size (in Decipoints)	✓	✓
ESC*c#K	Horizontal Plot Size (in Inches)	✓	✓
ESC*c#L	Vertical Plot Size (in Inches)	✓	✓

✓ = Supported X = Not supported		Printer model	
Command	Function	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
ESC*c#P	Fill Rectangular Area	✓	✓
ESC*c#Q	Pattern Control	✓	✓
ESC*c#R	Symbol Set ID Code	✓	✓
ESC*c#S	Symbol Set Control	✓	✓
ESC*c#T	Set Picture Frame Anchor Point	✓	✓
ESC*c#V	Vertical Rectangle Size (in Decipoints)	✓	✓
ESC*c#W[data]	Define Pattern	✓	✓
ESC*c#X	Picture Frame Horizontal Size (in Decipoints)	✓	✓
ESC*c#Y	Picture Frame Vertical Size (in Decipoints)	✓	✓
ESC*l#O	Logical Operation	✓	✓
ESC*l#R	Pixel Placement	✓	✓
ESC*l#W[data]	Color Lookup Tables	X	X
ESC*m#W[data]	Download Dither Matrix	✓	✓
ESC{o#M(b)	Print Quality	X	X
ESC{o#Q	Mechanical Print Quality	X	X
ESC{o#W[data]	Driver Configuration	✓	✓
ESC*p#P	Push/Pop Palette	✓	✓
ESC*p#R	Set Pattern Reference Point	✓	✓
ESC*p#X	Set Horizontal Cursor Position (in PCL Units)	✓	✓
ESC*p#Y	Set Vertical Cursor Position (in PCL Units)	✓	✓
ESC*r#A	Start Raster Graphics	✓	✓
ESC*r#F	Raster Graphics Presentation	✓	✓
ESC*r#S	Raster Width (Source)	✓	✓
ESC*r#T	Raster Height (Source)	✓	✓

✓ = Supported X = Not supported		Printer model	
Command	Function	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
ESC*r#U	Simple Color	✓	✓
ESC*rB	End Raster Graphics (Version B)	✓	✓
ESC*rC	End Raster Graphics (Version C)	✓	✓
ESC*s#I	Inquire Status Readback Entity	✓	✓
ESC*s1M	Free Space	✓	✓
ESC*s#T	Set Status Readback Location Type	✓	✓
ESC*s#U	Set Status Readback Location Unit	✓	✓
ESC*s#X	Echo	✓	✓
ESC*t#H	Raster Width (Destination)	✓	✓
ESC*t#I	Gamma Correction	✓	✓
ESC*t#J	Render Algorithm	X	X
ESC*t#K	Scale Algorithm	X	X
ESC*t#R	Set Resolution	✓	✓
ESC*t#V	Raster Height (Destination)	✓	✓
ESC*g#W	Set Raster Configuration	X	X
ESC*v#A	Color Component One	✓	✓
ESC*v#B	Color Component Two	✓	✓
ESC*v#C	Color Component Three	✓	✓
ESC*v#I	Assign Color Index	✓	✓
ESC*v#N	Source Transparency Mode	✓	✓
ESC*v#O	Pattern Transparency Mode	✓	✓
ESC*v#S	Foreground Color	✓	✓
ESC*v#T	Select Current Pattern	✓	✓
ESC*v#W[data]	Configure Image Data	✓	✓
ESC*i#W[data]	Viewing Illuminant	X	X
ESC9	Clear Horizontal Margins	✓	✓

✓ = Supported X = Not supported		Printer model	
Command	Function	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
ESC=	Half Line-Feed	✓	✓
ESC%#A	Enter HP PCL 5 Mode	✓	✓
ESC%#B	Enter HP-GL/2 Mode Note: The values -1, 2, and 3 are not supported by any of the printers included in this document.	✓	✓
ESC%-12345X	Universal Exit Language (UEL) / Start of PJL	✓	✓

GL/2 commands

✓ = Supported X = Not supported		Printer model	
Command	Function	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
AA	Arc Absolute	✓	✓
AC	Anchor Corner	✓	✓
AD	Define Alternate Font	✓	✓
AR	Arc Relative	✓	✓
AT	Arc Absolute Three Point	✓	✓
BR	Bezier Relative	✓	✓
BZ	Bezier Absolute	✓	✓
CF	Character Fill	✓	✓
CI	Circle	✓	✓
CO	Comment	✓	✓
CP	Character Plot	✓	✓
CR	Color Range	✓	✓
DF	Default	✓	✓
DI	Absolute Direction	✓	✓

✓ = Supported X = Not supported		Printer model	
Command	Function	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
DR	Relative Direction	✓	✓
DT	Define Label Terminator	✓	✓
DV	Define Variable Text Path	✓	✓
EA	Edge Rectangle Absolute	✓	✓
EP	Edge Polygon	✓	✓
ER	Edge Rectangle Relative	✓	✓
ES	Extra Space	✓	✓
EW	Edge Wedge	✓	✓
FI	Primary Font	✓	✓
FN	Secondary Font	✓	✓
FP	Fill Polygon, Odd/Even	✓	✓
FP	Fill Polygon, Non-Zero Winding	✓	✓
FT	Fill Type	✓	✓
FT	Fill Type - 22	✓	✓
FT	Fill Type - 9	✓	✓
IN	Initialize	✓	✓
IP	Input P1 and P2	✓	✓
IR	Input Relative P1 and P2	✓	✓
IW	Input Window	✓	✓
LA	Line Attributes	✓	✓
LB	Label, Default Terminator = '03'x	✓	✓
LO	Label Origin	✓	✓
LO	Uses PCL Label Origin	✓	✓
LT	Line Type	✓	✓
LM	Label Mode	X	X
MC	Logical Operation	✓	✓

✓ = Supported X = Not supported		Printer model	
Command	Function	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
NP	Number of Pens	✓	✓
PA	Plot Absolute	✓	✓
PC	Pen Color	✓	✓
PD	Pen Down	✓	✓
PE	Polyline Encoded	✓	✓
PM	Polygon Mode	✓	✓
PP	Pixel Placement	✓	✓
PR	Plot Relative	✓	✓
PU	Pen Up	✓	✓
PW	Pen Width	✓	✓
RA	Fill Rectangle Absolute	✓	✓
RF	Define Raster Fill	✓	✓
RO	Rotate Coordinate System	✓	✓
RR	Fill Rectangle Relative	✓	✓
RT	Arc Relative Three Point	✓	✓
SA	Select Alternate Font	✓	✓
SB	Scalable/Bitmapped Fonts	✓	✓
SC	Scale	✓	✓
SD	Define Standard Font	✓	✓
SI	Absolute Character Size	✓	✓
SL	Character Slant	✓	✓
SM	Symbol Mode	✓	✓
SP	Select Pen	✓	✓
SR	Relative Character Size	✓	✓
SS	Select Standard Font	✓	✓
SV	Screened Vectors	✓	✓

✓ = Supported X = Not supported		Printer model	
Command	Function	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
SV	Screened Vectors - 9, level	✓	✓
TD	Transparent Data	✓	✓
TM	Threshold Matrix	✓	✓
TR	Transparency Mode	✓	✓
UL	User Defined Line	✓	✓
WG	Fill Wedge	✓	✓
WU	Pen Width Units	✓	✓

Appendix B: PJL support

Common variables for both printer languages

Variable name	Printer model
✓ = Supported	
X = Not supported	
AUTOCONT	✓ X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
AUTOSELECT	X ✓
BINDING	✓ ✓
BITSPERPIXEL	X X
CLEARABLEWARNINGS	✓ ✓
CONTEXTSWITCH	X X
COPIES	✓ ✓
CPLOCK	✓ ✓
DENSITY	✓ ✓
DISKLOCK	X X
DUPLEX	✓ ✓
ECONOMODE	X X
FORMATERNUMBER	✓ ✓
FORMLINES	✓ ✓
HELDJOBTIMEOUT	✓ ✓
HOLD	✓ ✓
HOLDKEY	✓ ✓
HOLDTYPE	✓ ✓
IMAGEADAPT	X X
INTRAY1	X X
INTRAY2	✓ ✓
INTRAY3	✓ ✓
INTRAY4	✓ ✓

✓ = Supported X = Not supported	Printer model	
Variable name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
INTRAY5	✓	✓
INTRAY1SIZE	✓	✓
INTRAY2SIZE	✓	✓
INTRAY3SIZE	✓	✓
INTRAY4SIZE	✓	✓
INTRAY5SIZE	✓	✓
IOBUFFER	X	X
IOSIZE	X	X
JOBATTR	X	X
JOBNAME	✓	✓
JOBOFFSET	✓	✓
LANG	✓	✓
LOWTONER	✓	✓
MANUALFEED	✓	✓
MEDIASOURCE	X	X
MEDIATYPE	✓	✓
MPTRAY	✓	✓
ORIENTATION	✓	✓
OUTBIN	✓	✓
PAGEPROTECT	✓	✓
PAPER	✓	✓
PARALLEL	✓	✓
PASSWORD	✓	✓
PERSONALITY	✓	✓
POWERSAVE	✓	✓
POWERSAVETIME	✓	✓

✓ = Supported X = Not supported	Printer model	
Variable name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
PRINTQUALITY	X	X
QTY	✓	✓
RENDERMODE	X	X
REPEATJOBTIMEOUT	✓	✓
REPRINT	✓	✓
RESERVEJOBTIMEOUT	✓	✓
RESOLUTION	✓	✓
RESOURCESAVE	✓	✓
RESOURCESAVESIZE	X	X
RET	X	X
STRINGCODESET	✓	✓
TIMEOUT	✓	✓
USERNAME	✓	✓
VERIFYJOBTIMEOUT	✓	✓
WIDEA4	✓	✓

Lexmark-unique PJL variables for both printer languages

✓ = Supported X = Not supported	Printer model	
Variable name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
LACTIVEBINRESET	✓	✓
LADVANCEDSTATUS	✓	✓
LALARMCONTROL	✓	✓
LAUTOCRLF	✓	✓
LAUTOFLCR	✓	✓
LBAYERSCREENLIMIT	✓	✓

✓ = Supported X = Not supported	Printer model	
Variable name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
LBLANKPAGES	✓	✓
LBONDLENGTH	x	x
LBONDLOADING	✓	✓
LBONDOUTBIN	✓	✓
LBONDTEXTURE	✓	✓
LBONDWEIGHT	✓	✓
LBOTTOMMARGINFOFFSET	x	x
LBWLOCK	✓	✓
LCANCEL	✓	✓
LCARDSTOCKLENGTH	x	x
LCARDSTOCKLOADING	✓	✓
LCARDSTOCKOUTBIN	✓	✓
LCARDSTOCKTEXTURE	✓	✓
LCARDSTOCKWEIGHT	✓	✓
LCOLLATION	✓	✓
LCOLORBALANCEBLACK	✓	✓
LCOLORBALANCECYAN	✓	✓
LCOLORBALANCEMAGENTA	✓	✓
LCOLORBALANCEYELLOW	✓	✓
LCOLORCORRECTION	✓	✓
LCOLOREDLENGTH	x	x
LCOLOREDLOADING	✓	✓
LCOLOREDOUTBIN	✓	✓
LCOLOREDTEXTURE	✓	✓
LCOLOREDWEIGHT	✓	✓
LCOLORMODEL	✓	✓

✓ = Supported X = Not supported	Printer model	
Variable name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
LCOLORSAVER	✓	✓
LCOLORTRAPPING	✓	✓
LCUSTOMPAPERUNITS	✓	✓
LCUSTOMPAPERWIDTH	✓	✓
LCUSTOMPAPERHEIGHT	✓	✓
LCUSTOMPAPERFEED	✓	✓
LCUSTOMTYPE1LENGTH	x	x
LCUSTOMTYPE1LOADING	✓	✓
LCUSTOMTYPE1MEDIA	✓	✓
LCUSTOMTYPE1NAME	✓	✓
LCUSTOMTYPE1OUTBIN	✓	✓
LCUSTOMTYPE1TEXTURE	✓	✓
LCUSTOMTYPE1WEIGHT	✓	✓
LCUSTOMTYPE2LENGTH	x	x
LCUSTOMTYPE2LOADING	✓	✓
LCUSTOMTYPE2MEDIA	✓	✓
LCUSTOMTYPE2NAME	✓	✓
LCUSTOMTYPE2OUTBIN	✓	✓
LCUSTOMTYPE2TEXTURE	✓	✓
LCUSTOMTYPE2WEIGHT	✓	✓
LCUSTOMTYPE3LENGTH	x	x
LCUSTOMTYPE3LOADING	✓	✓
LCUSTOMTYPE3MEDIA	✓	✓
LCUSTOMTYPE3NAME	✓	✓
LCUSTOMTYPE3OUTBIN	✓	✓
LCUSTOMTYPE3TEXTURE	✓	✓

✓ = Supported X = Not supported	Printer model	
Variable name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
LCUSTOMTYPE3WEIGHT	✓	✓
LCUSTOMTYPE4LENGTH	x	x
LCUSTOMTYPE4LOADING	✓	✓
LCUSTOMTYPE4MEDIA	✓	✓
LCUSTOMTYPE4NAME	✓	✓
LCUSTOMTYPE4OUTBIN	✓	✓
LCUSTOMTYPE4TEXTURE	✓	✓
LCUSTOMTYPE4WEIGHT	✓	✓
LCUSTOMTYPE5LENGTH	x	x
LCUSTOMTYPE5LOADING	✓	✓
LCUSTOMTYPE5MEDIA	✓	✓
LCUSTOMTYPE5NAME	✓	✓
LCUSTOMTYPE5OUTBIN	✓	✓
LCUSTOMTYPE5TEXTURE	✓	✓
LCUSTOMTYPE5WEIGHT	✓	✓
LCUSTOMTYPE6LENGTH	x	x
LCUSTOMTYPE6LOADING	✓	✓
LCUSTOMTYPE6MEDIA	✓	✓
LCUSTOMTYPE6NAME	✓	✓
LCUSTOMTYPE6OUTBIN	✓	✓
LCUSTOMTYPE6TEXTURE	✓	✓
LCUSTOMTYPE6WEIGHT	✓	✓
LDOWNLOADTARGET	✓	✓
LDRYTIMEDELAY	x	x
LDUPLEXLEFTMARGINOFFSET	x	x
LDUPLEXTOPMARGINOFFSET	x	x
LDUPLICATEHELDJOBS	✓	✓

✓ = Supported X = Not supported	Printer model	
Variable name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
LECOMODE	✓	✓
LENVELOPEENHANCE	X	X
LENVELOPELENGTH	X	X
LENVELOPEOUTBIN	✓	✓
LENVELOPETEXTURE	✓	✓
LENVELOPEWEIGHT	✓	✓
LESCCHAR	✓	✓
LFAXFOLD	X	X
LFAXJOBWAITFORTONER	X	✓
LFAXRREDIAL	X	✓
LFAXRREDIALFREQUENCY	X	✓
LFAXRESOLUTION	X	✓
LFACTRANSMISSIONLOG	X	✓
LFOLD	X	X
LFEEDERPAPERTYPE	X	X
LGLOSSYLOADING	✓	✓
LGLOSSYOUTBIN	✓	✓
LGLOSSYTEXTURE	✓	✓
LGLOSSYWEIGHT	✓	✓
LHEAVYGLOSSYLOADING	✓	✓
LHEAVYGLOSSYOUTBIN	✓	✓
LHEAVYGLOSSYTEXTURE	✓	✓
LHEAVYGLOSSYWEIGHT	✓	✓
LHEAVYPAPERLOADING	✓	✓
LHEAVYPAPEROUTBIN	✓	✓
LHEAVYPAPERTEXTURE	✓	✓

✓ = Supported X = Not supported	Printer model	
Variable name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
LHEAVYPAPERWEIGHT	✓	✓
LHELDJOBPRTOORDER	✓	✓
LHOLEPUNCHALARM	✓	✓
LHOLEPUNCHMODE	✓	✓
LHONORINIT	✓	✓
LIMAGEESS	✓	✓
LIMAGEBRIGHTNESS	X	X
LIMAGECONTRAST	✓	✓
LIMAGEENHANCE	X	X
LIMAGEENHANCETYPE	X	X
LIMAGEORIENTATION	✓	✓
LIMAGESATURATION	✓	✓
LIMAGESMOOTHING	✓	✓
LINFEEDER	X	X
LINFEEDERSIZE	X	X
LINKALERT	X	X
LINMPFEEDERSIZE	✓	✓
LJAMRECOVERY	✓	✓
LJOBPARKPERSIST	✓	✓
LJOBWAITFORSUPPLIES	✓	✓
LLABELSLENGTH	X	X
LLABELSLOADING	✓	✓
LLABELSOUTBIN	✓	✓
LLABELSTEXTURE	✓	✓
LLABELSWEIGHT	✓	✓
LLASTTRAYRENUMBER	✓	✓
LLEFTMARGINFOFFSET	X	X

✓ = Supported X = Not supported	Printer model	
Variable name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
LLETTERHEADLENGTH	X	X
LLETTERHEADLOADING	✓	✓
LLETTERHEADOUTBIN	✓	✓
LLETTERHEADTEXTURE	✓	✓
LLETTERHEADWEIGHT	✓	✓
LLIGHTPAPERLOADING	✓	✓
LLIGHTPAPEROUTBIN	✓	✓
LLIGHTPAPERTEXTURE	✓	✓
LLIGHTPAPERWEIGHT	✓	✓
LLINEDETAIL	✓	✓
LMANUALCOLORRGBTEXT	✓	✓
LMANUALCOLORRGBGRAPHICS	✓	✓
LMANUALCOLORRGBIMAGE	✓	✓
LMANUALCOLORCMYKTEXT	✓	✓
LMANUALCOLORCMYKGRAFICS	✓	✓
LMANUALCOLORCMYKIMAGE	✓	✓
LMANUALENVELOPESIZE	✓	✓
LMANUALENVELOPETYPE	✓	✓
LMANUALPAPERSIZE	✓	✓
LMANUALPAPERTYPE	✓	✓
MICRJOB	X	X
LMAXSTATUSMSG	X	X
LMPFEEDERPAPERTYPE	✓	✓
LMFEEDERRENUMBER	✓	✓
LMULTIPAGEBORDER	✓	✓
LMULTIPAGEORDER	✓	✓

✓ = Supported X = Not supported	Printer model	
Variable name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
LMULTIPAGEPRINT	✓	✓
LMULTIPAGEVIEW	✓	✓
LNPAP	✓	✓
LOPTIONALOUTBIN1NAME	✓	✓
LOPTIONALOUTBIN2NAME	✓	✓
LOPTIONALOUTBIN3NAME	✓	✓
LOPTIONALOUTBIN4NAME	✓	✓
LOPTIONALOUTBIN5NAME	✓	✓
LOPTIONALOUTBIN6NAME	X	X
LOPTIONALOUTBIN7NAME	X	X
LOPTIONALOUTBIN8NAME	X	X
LOPTIONALOUTBIN9NAME	X	X
LOPTIONALOUTBIN10NAME	X	X
LOUTBINCONFIG	✓	✓
LOVERFLOWOUTBIN	✓	✓
LOVERFLOWTIMER	✓	✓
LPAGECOUNT	✓	✓
LPAGEMODE	✓	✓
LPAPERSOURCE	✓	✓
LPICTUREGRADE	X	X
LPLAINLENGTH	X	X
LPLAINOUTBIN	✓	✓
LPLAINTEXTURE	✓	✓
LPLAINWEIGHT	✓	✓
LPOWERSAVER	✓	✓
LPPDS	✓	✓
LPPDSFORMLINES	✓	✓

✓ = Supported X = Not supported	Printer model	
Variable name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
LPPDSLINESPERINCH	✓	✓
LPREPRINTEDLENGTH	X	X
LPREPRINTEDLOADING	✓	✓
LPREPRINTEDOUTBIN	✓	✓
LPREPRINTEDTEXTURE	✓	✓
LPREPRINTEDWEIGHT	✓	✓
LPRINTBUFFER	✓	✓
LPRINTSCREENS	✓	✓
LPRINtheadidletime	X	X
LPRINTERUSAGE	✓	✓
LPRINTMENUSBUTTON	X	X
LPRINTQUALITY	X	X
LPUNCH	✓	✓
LQUIETMODE	✓	✓
LREAROUTBINNAME	X	X
LRECYCLEDLOADING	✓	✓
LRECYCLEDMEDIA	✓	✓
LRECYCLEDOUTBIN	✓	✓
LRECYCLEDTEXTURE	✓	✓
LRECYCLEDWEIGHT	✓	✓
LREPEATPRINTLIMIT	✓	✓
LRESET	✓	✓
LRESOURCESAVE	✓	✓
LRIGHTMARGINFOFFSET	X	X
LROUGHENVELOPELOADING	X	X
LROUGHENVELOPEOUTBIN	✓	✓
LROUGHENVELOPETEXTURE	✓	✓

✓ = Supported X = Not supported	Printer model	
Variable name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
LROUGHENVELOPEWEIGHT	✓	✓
LROUGHPAPERLOADING	✓	✓
LROUGHPAPEROUTBIN	✓	✓
LROUGHPAPERTEXTURE	✓	✓
LROUGHPAPERWEIGHT	✓	✓
LSCREENING	X	X
LSEPARATORSHEETS	✓	✓
LSEPARATORSOURCE	✓	✓
LSMALLFONTENHANCER	X	X
LSSGALVO	X	X
LSTANDARDOUTBINNAME	✓	✓
LSTAPLE	✓	✓
LSTAPLEEMPTYALARM	✓	✓
LSTAPLETESBIN	X	X
LSTAPLETESOURCE	X	X
LSTROKEWIDTH	✓	✓
LSUBSTITUTESIZE	✓	✓
LTOPBINROTATE	✓	✓
LTOPMARGINOFFSET	X	X
LTRANSPARENCYLENGTH	X	X
LTRANSPARECYOUTBIN	✓	✓
LTRANSPARECYTEXTURE	✓	✓
LTRANSPARECYWEIGHT	✓	✓
LTRAY1AUTOSIZE	✓	✓
LTRAY2AUTOSIZE	✓	✓
LTRAY3AUTOSIZE	✓	✓
LTRAY4AUTOSIZE	✓	✓

✓ = Supported X = Not supported	Printer model	
Variable name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
LTRAY5AUTOSIZE	✓	✓
LTRAY1PAPERTYPE	✓	✓
LTRAY2PAPERTYPE	✓	✓
LTRAY3PAPERTYPE	✓	✓
LTRAY4PAPERTYPE	✓	✓
LTRAY5PAPERTYPE	✓	✓
LTRAY1RENUMBER	✓	✓
LTRAY1SENSEDTYPEPAPER	X	X
LTRAY1SENSEDTYPETRANSPARENCY	X	X
LTRAY2SENSEDTYPEPAPER	X	X
LTRAY2SENSEDTYPETRANSPARENCY	X	X
LTRAY3SENSEDTYPEPAPER	X	X
LTRAY3SENSEDTYPETRANSPARENCY	X	X
LTRAY4SENSEDTYPEPAPER	X	X
LTRAY4SENSEDTYPETRANSPARENCY	X	X
LTRAYINSERTMESSAGEDELAY	✓	✓
LTYPE1FONTS	✓	✓
LUSDEFAULTS	✓	✓
LVINYLLABELSLOADING	✓	✓
LVINYLLABELSOUTBIN	✓	✓
LVINYLLABELSTEXTURE	✓	✓
LVINYLLABELSWEIGHT	✓	✓
LWRITECOVERAGE	✓	✓

Common variables for PCL emulation

Lexmark-unique variables for PCL emulation

		Printer model	
Variable name		C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
LA4WIDTH		✓	✓
LASSIGNFEEDER		✗	✗
LASSIGNMANUALENVELOPE		✓	✓
LASSIGNMANUALPAPER		✓	✓
LASSIGNMPFEEDER		✓	✓
LASSIGNTRAY1		✓	✓
LASSIGNTRAY2		✓	✓
LASSIGNTRAY3		✓	✓
LASSIGNTRAY4		✓	✓
LASSIGNTRAY5		✓	✓
LBITMAPROUNDING		✓	✓
LCOLOREXTENSIONS		✓	✓
LFONTCOMPATIBILITY		✓	✓
LFONTPRIORITY		✓	✓

Common variables for PostScript emulation

✓ = Supported X = Not supported	Printer model	
Variable name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
JAMRECOVERY	✓	✓
PRTPSERRS	✓	✓
ADOBEMBT	x	x

Lexmark-unique variables for PostScript emulation

✓ = Supported X = Not supported	Printer model	
Variable name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
LPICTUREGRADE	x	x
LPSFONTPRIORITY	✓	✓

Lexmark-unique LRESOURCE variables

✓ = Supported X = Not supported	Printer model	
Variable name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
LDESCRIPTION	✓	✓
LRWLOCK	✓	✓
LWLOCK	✓	✓

Status Readback commands

Command	Printer model
DINQUIRE	✓
ECHO	✓
INFO	✓
INQUIRE	✓
USTATUS	✓
USTATUSOFF	✓

USTATUS unsolicited status variables

Variable name	Printer model
DEVICE	✓
JOB	✓
PAGE	✓
TIMED	✓

PJL messages for auto-continuable conditions

\checkmark = Supported \times = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - PPDS Font Error	30014	50 PPDS font error	\checkmark	\checkmark
Intervention Required - Insufficient Collation Area	30016	37 Insufficient Collation Area	\times	\times
Intervention Required - Insufficient Defragment Memory	30016	37 Insufficient Defrag Memory	\times	\times
Intervention Required - Insufficient Memory	30016	37 Insufficient memory, some Held Jobs were deleted	\checkmark	\checkmark
Intervention Required - Insufficient Defragment Memory	30016	37 Insufficient memory, some Held Jobs were deleted	\times	\times
Intervention Required - Insufficient Defragment Memory	30016	37 Insufficient memory, some Held Jobs will not be restored	\times	\times
Intervention Required - Insufficient Defragment Memory	30016	37 Insufficient memory for Flash Memory Defragment operation	\checkmark	\checkmark
Intervention Required - Insufficient Collation Area	30016	37 Insufficient memory to collate job	\checkmark	\checkmark
Intervention Required - Memory Full	30016	38 Memory full	\checkmark	\checkmark
Intervention Required - Configuration Change	30016	57 Configuration Change	\times	\times
Intervention Required - Held Jobs May Not Be Restored (57 Configuration Change)	30016	57 Configuration change, some held jobs were not restored	\checkmark	\checkmark

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Held Jobs May Not Be Restored	30016	Held Jobs May Not Be Restored	X	X
Intervention Required - Held Jobs May Not Be Restored	30016	Some held jobs were not restored	✓	✓
Intervention Required - Held Jobs May Not Be Restored	30016	37 Insufficient memory, some held jobs will not be restored	✓	✓
Intervention Required - Complex Page	30017	39 Complex page, some data may not have printed	✓	✓
Intervention Required - Parallel Error	30018	54 Parallel Error	X	X
Intervention Required - Serial Option Error	30018	54 Serial option [slot #] error	X	X
Intervention Required - Standard Serial Error	30018	54 Standard Serial Error	X	X
Intervention Required - Standard Network Software Error	30018	54 Standard network software error	✓	✓
Intervention Required - Standard Serial Fax Connection Lost	30018	54 Std Ser Fax Connection Lost	X	X
Intervention Required - Parallel Port Disabled	30018	56 Parallel Port Disabled	X	X
Intervention Required - Parallel Port Error	30018	56 Parallel Port Disabled	X	X
Intervention Required - Serial Option Disabled	30018	56 Serial [slot #] Port Disabled	X	X
Intervention Required - Standard Serial Disabled	30018	56 Standard Serial Disabled	X	X

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Standard USB Port Disabled	30018	56 Standard USB port disabled	✓	✓
Intervention Required - Std Parallel Port Disabled	30018	56 Std Parallel Port Disabled	X	X
Intervention Required - Resource Save Off Deficient Memory	30019	35 Res Save Off Deficient Memory	X	X
Intervention Required - Insufficient Fax Buffer	30026	55 Insufficient Fax Buffer	X	X
Intervention Required - Std Par ENA Connection Lost	30027	54 Std Par ENA Connection Lost	X	X
Intervention Required - Standard Parallel Port Disabled	30027	56 Standard Parallel Port Disabled	X	X
Intervention Required - Std Parallel Port Disabled	30027	56 Std Parallel Port Disabled	X	X
Intervention Required - Resolution Reduced	30029	36 Resolution Reduced	X	X
Intervention Required - Print Jobs on Disk Request	30031	Print Jobs on Disk? or Print Jobs on Disk. Go/Stop?	X	X
Intervention Required - Restore Held Jobs. Go/Stop?	30031	Restore held jobs?	✓	✓
Intervention Required - Short Paper	30034	34 Short Paper	X	X
Intervention Required - Short Paper	30034	34 Incorrect paper size, open [paper source]	✓	✓
Intervention Required - Flash Full	30035	52 Flash Full	X	X

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Disk Full	30035	62 Disk Full	X	X
Intervention Required - Defective Flash	30036	51 Defective Flash	X	X
Intervention Required - Unformatted Flash	30036	53 Unformatted Flash	X	X
Intervention Required - Defective Disk	30036	61 Defective Disk	X	X
Intervention Required - Unformatted Disk	30036	63 Unformatted Disk	X	X
Intervention Required - Scheduled Maintenance	30075	80 Scheduled Maintenance	X	X
Intervention Required - Scheduled Maintenance	30075	80 Scheduled maintenance ADF kit	X	X
Intervention Required - Res Save Off Deficient Memory	30076	35 Insufficient memory to support Resource Save feature	✓	✓
Intervention Required - Insufficient memory	30076	35 Insufficient memory to support Resource Save feature	X	X
Intervention Required - Resource Save Off Deficient Memory	30076	35 Res Save Off Deficient Memory	X	X
Intervention Required - Insufficient Collation Area	30076	37 Insufficient Collation Area	X	X
Intervention Required - Service Required	30095	36 Printer service required	X	X
Intervention Required - Empty Box M	30107	Empty Box M	X	X
Intervention Required - Empty Hole Punch Box	30107	Empty Hole Punch Box	X	X

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Insert Box M	30107	Insert Box M	X	X
Intervention Required - Insert Staple Cartridge	30107	Insert staple cartridge	✓	✓
Intervention Required - Insert Stapler	30107	Insert Stapler	X	X
Intervention Required - Priming Failed	30107	Priming Failed, Retry. Go/Stop?	X	X
Intervention Required - Network [x] Software Error	30112	54 Network [x] software error	✓	✓
Intervention Required - Serial [x] Fax Connection Lost	30112	54 Ser [x] Fax Connection Lost	X	X
Intervention Required - Serial Option [x] Error	30112	54 Serial option [x] error	✓	✓
Intervention Required - Serial Port [x] Disabled	30112	56 Serial port [x] disabled	✓	✓
Intervention Required - USB Port [x] Disabled	30112	56 USB port [x] disabled	✓	✓
Intervention Required - Parallel [x] ENA Connection Lost	30113	54 Par [x] ENA Connection Lost	X	X
Intervention Required - Parallel Port [x] Disabled	30113	56 Parallel port [x] disabled	✓	✓
Intervention Required - Disk Operation Failed Faxes on Disk	32001	Operation Failed Faxes on Disk	X	X
Intervention Required - Disk Operation Failed Jobs on Disk	32001	Operation Failed Jobs on Disk	X	X
Intervention Required - Flash Full	32002	52 Flash Full	X	X

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Flash Full	32002	52 Not enough free space in flash memory for resources	✓	✓
Intervention Required - Disk Full	32002	62 Disk full	✓	✓
Intervention Required - Disk Corrupted	32015	Disk Corrupted	X	X
Intervention required - Disk Corrupted. Reformat?	32015	Disk Corrupted. Reformat?	X	X
Intervention required - Too Many Bins Attached	32030	58 Too many bins attached	X	X
Intervention Required - Too Many Flash Options Installed	32030	58 Too Many Flash Options	X	X
Intervention Required - Too Many Flash Options Installed	32030	58 Too many flash options installed	X	X
Intervention Required - Unformatted Flash	32052	53 Unformatted flash detected	✓	✓
Intervention Required - Unformatted Flash Detected	32052	53 Unformatted Flash detected	X	X
Intervention Required - Unformatted Disk	32052	63 Unformatted disk	X	X
Intervention Required - Unsupported Disk Format	32052	64 Unsupported Disk Format	X	X
Intervention Required - Defective Flash	32056	51 Defective Flash	X	X
Intervention Required - Defective Flash	32056	51 Defective flash detected	✓	✓
Intervention Required - Defective Disk	32056	61 Defective Disk	X	X

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Defective Disk	32056	61 Remove defective disk	X	X
Intervention Required - Scheduled Maintenance	35075	80 Scheduled Maintenance	X	X
Intervention Required - Scheduled Maintenance	35075	81 Scheduled Maintenance	X	X
Intervention Required - Scheduled Maintenance	40315	81 Scheduled Maintenance [x]	X	X
Intervention Required - Scheduled Maintenance	40316	81 Scheduled Maintenance [x]	X	X
Intervention Required - Belt Life Warning	40038	80 Belt Life Warning	X	X
Intervention Required - Belt Exhausted	40038	80 Belt Exhausted	X	X
Intervention Required - Fuser Maintenance	40038	80 Fuser Maintenance	X	X
Intervention Required - Fuser Life Warning	40038	80 Fuser Life Warning	X	X
Intervention Required - Fuser Exhausted	40038	80 Fuser Exhausted	X	X
Intervention Required - Fuser/Belt Life Warning	40038	80 Fuser/Belt Life Warning	X	X
Intervention Required - Fuser/Belt Exhausted	40038	80 Fuser/Belt Exhausted	X	X
Intervention Required - ITU Maintenance	40038	83 ITU Maintenance	X	X
Intervention Required - PJL OP Message	40048	[Pick up text from 'data1' and 'data2 but not 'userMessage1' and 'userMessage2']	✓	✓

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - PJL ST Message	40049	[Pick up text from 'data1' and 'data2' but not 'userMessage1' and 'userMessage2']	✓	✓
Intervention Required - Waste Toner Nearly Full	40141	82.xx Waste toner bottle nearly full or 82.xx Waste toner box nearly full	✓	✓
Intervention Required - Transfer Module Life Warning	40215	83.xx Transfer module life warning	✓	✓

PJL messages for attendance conditions

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Empty Hole Punch Box	30107	Empty the hole punch box	✓	✓
Intervention Required - Insert Staple Cartridge	30107	Insert staple cartridge	✓	✓
Intervention required - Disk Corrupted. Reformat?	32015	Disk corrupted	✓	✓
Intervention Required - Too Many Bins Attached	32030	58 Too many bins attached	✓	✓

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Too Many Flash Options Installed	32030	58 Too many flash options installed	✓	✓
Intervention Required - Disk Problem	32052	Disk problem	✓	✓
Intervention Required - Remove Defective Disk	32056	61 Remove defective disk	✓	✓
Intervention Required - Defective Flash	32056	61 Defective flash detected	X	X
Intervention Required - Insert Hole Punch Box	40010	Insert Hole Punch Box	X	X
Intervention Required - Insert PC Cartridge	40010	Insert PC Cartridge	X	X
Intervention Required - 30 CMYK* Print Unit Missing	40010	30 CMYK* Print Unit Missing	X	X
Intervention Required - 30 Coating Roll Missing	40010	30 Coating Roll Missing	X	X
Intervention Required - Remove Originals from Scanner ADF	40019	Remove originals from the scanner automatic document feeder	X	X
Intervention Required - Remove Paper Standard Bin	40019	Remove paper from standard output bin	✓	✓
Intervention Required - Remove Paper Output Bin [x]	40019	Remove paper from bin [x]	✓	✓
Intervention Required - Remove Paper [All Output Bins]	40019	Remove paper from all bins	✓	✓
Intervention Required - Remove Paper [linked set bin name]	40019	Remove paper from [linked set bin name]	✓	✓

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Install MICR cartridge	40020	Install MICR cartridge	X	X
Intervention Required - Cartridge Life Expired	40021	Cartridge Life Expired CMYK*	X	X
Intervention Required - Cartridge Life Warning	40021	Cartridge Life Warning CMYK*	X	X
Intervention Required - Change Cartridge Invalid Refill	40021	Change Cartridge Invalid Refill	X	X
Intervention Required - Close Cover [x]	40021	Close cover [x]	X	X
Intervention Required - Close Cover [x]	40021	Close paper transport cover	✓	✓
Intervention Required - Printer Cover Open	40021	Close Cover	X	X
Intervention Required - Close Toner Box Cover	40021	Close Cover	X	X
Intervention Required - Close Deflector G	40021	Close Deflector G	X	X
Intervention Required - Close Door	40021	Close Door	X	X
Intervention Required - Close Door [x]	40021	Close door [x]	X	X
Intervention Required - Close Door [x]	40021	Close stapler door	✓	✓
Intervention Required - Close Door Insert Cartridge	40021	Close door or insert cartridge	X	X
Intervention Required - Close Finisher Door	40021	Close Finisher Door	X	X
Intervention Required - Close Finisher Side Door	40021	Close finisher side door	✓	✓

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Close Finisher Top Cover	40021	Close finisher top cover	✓	✓
Intervention Required - Close Front Door	40021	Close front door	✓	✓
Intervention Required - Close Left Side Door	40021	Close left side door	✓	✓
Intervention Required - Close Low ADF Door	40021	Close lower automatic feeder door	X	✓
Intervention Required - Close Side Door	40021	Close Side Door	X	X
Intervention Required - Close Surface	40021	Close surface H	X	X
Intervention Required - Close Cover	40021	Close top access cover	X	✓
Intervention Required - Close Cover and Door	40021	Close top access cover and front door	X	X
Intervention Required - Close Door	40021	Close [tray] door	✓	✓
Intervention Required - Close Tray [x] Top Cover	40021	Close Tray [x] Top Cover	X	X
Intervention Required - Printer Upper Door Open	40021	Cover Open, Close Top Covers, Close Door, or Insert Cartridge	X	X
Intervention Required - Insert Print Cartridge	40021	Insert Print Cartridge	X	X
Intervention Required - Open Cover	40021	Open Cover	X	X
Intervention Required - Open Rear Door	40021	Open Rear Door	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Invalid Refill	40021	30 Invalid Refill Change Cartridge	X	X
Intervention Required - Defective Ink Cartridge	40021	31 Defective Cartridge CMYK*	X	X
Intervention Required - Defective Print Cartridge	40021	31 Defective Print Cartridge	X	X
Intervention Required - Missing Cartridge	40021	31 Missing Cartridge CMYK*	X	X
Intervention Required - Missing Printhead	40021	31 Missing Printhead	X	X
Intervention Required - Defective Print Cartridge	40021	31 Replace defective cartridge	X	X
Intervention Required - Invalid Refill	40021	31.xx Invalid refill, change cartridge	X	X
Intervention Required - Defective Print Cartridge	40021	31.xx Replace defective cartridge	X	X
Intervention Required - Defective Print Cartridge	40021	31.xx Replace defective print cartridge	X	X
Intervention Required - Unsupported Cartridge	40021	32 Unsupported Cartridge	X	X
Intervention Required - Unsupported CMYK* Cartridge	40021	32 Unsupported CMYK* Cartridge	X	X
Intervention Required - Unsupported Print Cartridge	40021	32 Unsupported Print Cartridge	X	X
Intervention Required - Unsupported Printhead	40021	32 Unsupported Printhead	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Unsupported Cartridge	40021	32.xx Cartridge part number unsupported by device	X	X
Intervention Required - Tray Size Sense Error	40021	40 Tray [x] Size Sense Error	X	X
Intervention Required - Open Bin Exit Tray	40021	41 Open Bin 1 Exit Tray	X	X
Intervention Required - Cartridge Region Mismatch	40021	42.xy Cartridge region mismatch	X	X
Intervention Required - Paper Jam	40022	2xx Paper Jam	X	X
Intervention Required - Remove Packaging Material	40025	Remove packaging material	X	X
Intervention Required - Remove Packaging Material	40025	Remove packaging material, [area name]	✓	✓
Intervention Required - Waste Toner Missing	40025	82 Waste toner bottle missing	X	X
Intervention Required - Waste Toner Bottle Missing	40025	82.xx Waste toner bottle missing	✓	✓
Intervention Required - Waste Toner Missing	40025	82.xx Waste toner box missing	✓	✓
Intervention Required - Check Tray Connection	40027	Check tray [paper source #] connection	X	X
Intervention Required - Install Tray [x] or Cancel Job	40027	Install tray [x]	✓	✓

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Install Tray [x] or Cancel Job	40027	Install Tray [x] or Cancel Job	X	X
Intervention Required - Install Env Feed or Cancel Job	40028	Install envelope feeder	✓	✓
Intervention Required - Install Env Feeder or Cancel Job	40028	Install Env Feed or Cancel Job	X	X
Intervention Required - Reattach Envelope Feeder	40028	Reattach Envelope Feeder	X	X
Intervention Required - Reattach MP Feeder	40028	Reattach MP Feeder	X	X
Intervention Required - Check Finisher Installation	40029	Check Finisher Installation	X	X
Intervention Required - Check Mailbox Installation	40029	Check Mailbox Installation	X	X
Intervention Required - Install Bin [x] or Cancel Job	40029	Install bin [x]	✓	✓
Intervention Required - Reattach Bin	40029	Reattach bin [x]	✓	✓
Intervention Required - Reattach Bins	40029	Reattach bins [x]-[y]	✓	✓
Intervention Required - Reattach Output Bin	40029	Reattach bin [x]	✓	✓
Intervention Required - Tray Config Error	40030	33 Tray [x] Config Error	X	X
Intervention Required - Input Config Error	40030	58 Input config error	✓	✓
Intervention Required - Too Many Bins Attached	40030	58 Too Many Bins Attached	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Too Many Disks Installed	40030	58 Too many disks installed	✓	✓
Intervention Required - Too Many Trays Attached	40030	58 Too many trays attached	✓	✓
Intervention Required - Too Many Disks Installed	40036	58 Too Many Disks Installed	X	X
Intervention Required - PerfectFinish Missing	40037	31 PerfectFinish Missing	X	X
Intervention Required - PerfectFinish Empty	40037	87 PerfectFinish Empty	X	X
Intervention Required - Replace Oil Coating Roll	40038	Replace Oil Coating Roll	X	X
Intervention Required - Replace PC Kit	40038	Replace PC Kit	X	X
Intervention Required - Replace PC Kit To Continue	40038	Replace PC Kit To Continue	X	X
Intervention Required - Replace Toner Cartridge	40038	Replace Toner Cartridge	X	X
Intervention Required - Replace Toner Cartridge To Continue	40038	Replace Toner To Continue	X	X
Intervention Required - 84 All Photo Devs Exhausted	40038	84 All Photo Devs Exhausted	X	X
Intervention Required - 84 Black Photo Dev Exhausted	40038	84 Black Photo Dev Exhausted	X	X
Intervention Required - 84 Black Photo Dev Life Warning	40038	84 Black Photo Dev Life Warning	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - 84 Color Photo Dev Life Warning	40038	84 Color Photo Dev Life Warning	X	X
Intervention Required - Cartridge Low	40038	88 Cartridge Low	X	X
Intervention Required - [Color] Cartridge Low	40038	88 [Color] cartridge is low	X	X
Intervention Required - Toner Low	40038	88 Cartridge low	X	X
Intervention Required - Cartridge Low	40038	88 Cartridge Low [CMYK]	X	X
Intervention Required - Toner Low	40038	88 Toner is low	X	X
Intervention Required - Toner Low	40038	88 Toner Low	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Toner Low	40038	88 Yellow Toner Low	X	X
		88 Magenta Toner Low		
		88 Cyan Toner Low		
		88 Black Toner Low		
		88 Color Print Cartridge Low	X	X
		88 Black Print Cartridge Low		
		88 Photo Print Cartridge Low		
		88 Yellow Toner Empty	X	X
		88 Magenta Toner Empty		
		88 Cyan Toner Empty		
		88 Black Toner Empty		
Intervention Required - Cartridge Nearly Low	40038	88.xx Cartridge nearly low	X	X
Intervention Required - Cartridge Empty	40039	89 Cartridge Empty [CMYK]	X	X
Intervention Required - Load Staples	40040	Load Staples	X	X
Intervention Required - Priming Failed. Retry?	40041	Priming Failed. Retry?	X	X
Intervention Required - PJL OP Message	40048	OPMSG message	✓	✓
Intervention Required - PJL ST Message	40049	STMSG message	✓	✓
Intervention Required - Replace Fuser	40050	Replace Fuser	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Replace Transfer Kit	40050	Replace Transfer Kit	X	X
Intervention Required - Incompatible Bin [x]	40087	59 Incompatible Bin [x]	X	X
Intervention Required - Incompatible Output Bin [x]	40087	59 Incompatible output bin [x]	✓	✓
Intervention Required - Incompatible Duplex	40088	59 Incompatible Duplex	X	X
Intervention Required - Incompatible Duplex	40088	59 Incompatible duplex	X	X
Intervention Required - Incompatible Tray [x]	40089	59 Incompatible Tray [x]	X	X
Intervention Required - Incompatible Tray [x]	40089	59 Incompatible tray [x]	X	X
Intervention Required - Paper Size Unsupported	40089	Tray [x] paper size unsupported	✓	✓
Intervention Required - Incompatible Envelope Feeder	40090	59 Incompatible Envelope Feeder	X	X
Intervention Required - Incompatible Envelope Feeder	40090	59 Incompatible envelope feeder	X	X
Intervention Required - Check Duplex Connection	40095	Check Duplex Connection	X	X
Intervention Required - Check Duplex Connection	40095	Check duplex connection	X	X
Intervention Required - Install Duplex or Cancel Job	40095	Install Duplex or Cancel Job	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Install Duplex or Cancel Job	40095	Install duplex	X	X
Intervention Required - Duplex Cover Open	40096	Close Duplex Door	X	X
Intervention Required - Insert Duplex Option	40096	Insert Duplex Option	X	X
Intervention Required - Load Staples	40101	Load staples	✓	✓
Intervention Required - Insert Hole Punch Box	40107	Insert hole punch box	✓	✓
Intervention Required - Replace Color PC Units	40129	84 Replace color PC Units	X	X
Intervention Required - Replace Photoconductor	40129	84.xx Replace [Color] photoconductor	X	X
Intervention Required - Replace Waste Toner Bottle	40141	82.xx Replace waste toner bottle	✓	✓
Intervention Required - Replace Waste Toner	40141	82 Replace waste toner bottle	X	X
Intervention Required - Waste Toner Bottle Nearly Full	40141	82.xx Waste toner bottle nearly full	✓	✓
Intervention Required - Waste Toner Nearly Full	40141	82 Waste toner bottle nearly full	X	X
Intervention Required - Transfer Module Missing	40143	83.xx Transfer module missing	✓	✓
Intervention Required - Cartridge Low	40200	88.xx Black cartridge low	✓	✓
Intervention Required - Cartridge Nearly Low	40200	88.1x black cartridge nearly low	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Cartridge Very Low	40200	88.xx Black cartridge very low	✓	✓
Intervention Required - Replace Cartridge	40200	88.xx Black cartridge critically low	✓	✓
Intervention Required - Replace Cartridge	40200	88.2x Replace black cartridge	X	X
Intervention Required - Cartridge Low	40201	88.xx Cyan cartridge low	✓	✓
Intervention Required - Cartridge Nearly Low	40201	88.1x cyan cartridge nearly low	X	X
Intervention Required - Cartridge Very Low	40201	88.xx Cyan cartridge very low	✓	✓
Intervention Required - Replace Cartridge	40201	88.xx Cyan cartridge critically low	✓	✓
Intervention Required - Replace Cartridge	40201	88.2x Replace cyan cartridge	X	X
Intervention Required - Cartridge Low	40202	88.xx Magenta cartridge low	✓	✓
Intervention Required - Cartridge Nearly Low	40202	88.1x magenta cartridge nearly low	X	X
Intervention Required - Cartridge Very Low	40202	88.xx Magenta cartridge very low	✓	✓
Intervention Required - Replace Cartridge	40202	88.xx Magenta cartridge critically low	✓	✓
Intervention Required - Replace Cartridge	40202	88.2x Replace magenta cartridge	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Cartridge Low	40203	88.xx Yellow cartridge low	✓	✓
Intervention Required - Cartridge Nearly Low	40203	88.1x yellow cartridge nearly low	X	X
Intervention Required - Cartridge Very Low	40203	88.xx Yellow cartridge very low	✓	✓
Intervention Required - Replace Cartridge	40203	88.xx Yellow cartridge critically low	✓	✓
Intervention Required - Replace Cartridge	40203	88.2x Replace yellow cartridge	X	X
Black PC Unit Life Warning	40204	84 Black pc unit life warning	X	X
Intervention Required - Unsupported PC Unit	40204	84 unsupported [color] pc unit	X	X
Intervention Required - Color PC Units Life Warning	40204	84.xx Color PC Unit Life warning	X	X
Intervention Required - PC Kit Life Warning	40204	84 PC kit life warning	X	X
Intervention Required - Photoconductor Low	40204	84.xx [Color] photoconductor low	X	X
Intervention Required - Photoconductor Low	40204	84 Photoconductor low	X	X
Intervention Required - Photoconductor Nearly Low	40204	84.xx [color] photoconductor nearly low	X	X
Intervention Required - Transfer Module Life Warning	40215	83.xx Transfer module life warning	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Transfer Module Near Life Warning	40215	83.xx Transfer module near life warning	X	X
Intervention Required - Fuser Life Warning	40216	87 Fuser Life Warning	X	X
Intervention Required - Fuser Life Warning	40216	80.xx Fuser life warning	✓	✓
Intervention Required - Fuser Near Life Warning	40216	80.xx Fuser near life warning	✓	✓
Intervention Required - Replace Toner	40300	88 Replace black toner	X	X
Intervention Required - Replace Toner	40301	88 Replace cyan toner	X	X
Intervention Required - Replace Toner	40302	88 Replace magenta toner	X	X
Intervention Required - Replace Toner	40303	88 Replace yellow toner	X	X
Intervention Required - Replace PC Kit	40304	84 Replace PC Kit	X	X
Intervention Required - Replace Photoconductor	40304	84 Replace photoconductor	X	X
Intervention Required - 84 Replace Black PC Unit	40305	84 Replace black PC Unit	X	X
Intervention Required - Cartridge Part Number Unsupported	40309	32.xx Black cartridge part number unsupported by device	✓	✓
Intervention Required - Replace unsupported cartridge	40309	32.xx Replace unsupported black cartridge	X	X
Intervention Required - Invalid Refill, Change Cartridge	40309	40 Black invalid refill, change cartridge	✓	✓

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Cartridge Part Number Unsupported	40310	32.xx Cyan cartridge part number unsupported by device	✓	✓
Intervention Required - Replace unsupported cartridge	40310	32.xx Replace unsupported cyan cartridge	X	X
Intervention Required - Invalid Refill, Change Cartridge	40310	40 Cyan invalid refill, change cartridge	✓	✓
Intervention Required - Cartridge Part Number Unsupported	40311	32.xx Magenta cartridge part number unsupported by device	✓	✓
Intervention Required - Replace unsupported cartridge	40311	32.xx Replace unsupported magenta cartridge	X	X
Intervention Required - Invalid Refill, Change Cartridge	40311	40 Magenta invalid refill, change cartridge	✓	✓
Intervention Required - Cartridge Part Number Unsupported	40312	32.xx Yellow cartridge part number unsupported by device	✓	✓
Intervention Required - Replace unsupported cartridge	40312	32.xx Replace unsupported yellow cartridge	X	X
Intervention Required - Invalid Refill, Change Cartridge	40312	40 Yellow invalid refill, change cartridge	✓	✓

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Scheduled Maintenance	40315	80 Scheduled maintenance [x] Note: [x] indicates 600K kit.	X	X
Intervention Required - Replace Transfer Module	40315	83.xx Replace transfer module	✓	✓
Intervention Required - Install Finisher	40316	Slide finisher to the left	✓	✓
Intervention Required - Replace Fuser	40316	80.xx Replace fuser	✓	✓
Intervention Required - Replace Fuser	40316	87.xx Replace fuser	X	X
Intervention Required - Scheduled Maintenance	40316	80 Scheduled maintenance [x] Note: [x] indicates 100K kit.	X	X
Intervention Required - Replace Cartridge	40400	31.xx Replace defective or missing cartridge	X	X
Intervention Required - Insert Photoconductor	40404	84 Insert photoconductor	X	X
Intervention Required -	40404	84 Photoconductor abnormal	X	X
Intervention Required - [Color] PC Unit Missing	40405	84.41 Black PC Unit missing	X	X
Intervention Required - [Color] Photoconductor Missing	40405	84.41 Black photoconductor missing	X	X
Intervention Required - [Color] PC Unit Missing	40406	84.41 Cyan PC Unit missing	X	X
Intervention Required - [Color] Photoconductor Missing	40406	84.41 Cyan photoconductor missing	X	X
* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.				

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - [Color] PC Unit Missing	40407	84.41 Magenta PC Unit missing	X	X
Intervention Required - [Color] Photoconductor Missing	40407	84.41 Magenta photoconductor missing	X	X
Intervention Required - [Color] PC Unit Missing	40408	84.41 Yellow PC Unit missing	X	X
Intervention Required - [Color] Photoconductor Missing	40408	84.41 Yellow photoconductor missing	X	X
Intervention Required - Toner Cartridge Missing	40409	30.xx Black toner cartridge missing	X	X
Intervention Required - Defective Cartridge	40409	31.xx Defective black cartridge	X	X
Intervention Required - Missing or Defective Cartridge	40409	31.41 Missing or defective black cartridge	✓	✓
Intervention Required - Toner Cartridge Missing	40410	30.xx Cyan toner cartridge missing	X	X
Intervention Required - Defective Cartridge	40410	31.xx Defective cyan cartridge	X	X
Intervention Required - Missing or Defective Cartridge	40410	31.41 Missing or defective cyan cartridge	✓	✓
Intervention Required - Toner Cartridge Missing	40411	30.xx Magenta toner cartridge missing	X	X
Intervention Required - Defective Cartridge	40411	31.xx Defective magenta cartridge	X	X
Intervention Required - Missing or Defective Cartridge	40411	31.41 Missing or defective magenta cartridge	✓	✓

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported ✗ = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Toner Cartridge Missing	40412	30.xx Yellow toner cartridge missing	✗	✗
Intervention Required - Defective Cartridge	40412	31.xx Defective yellow cartridge	✗	✗
Intervention Required - Missing or Defective Cartridge	40412	31.41 Missing or defective yellow cartridge	✓	✓
Intervention Required - Fuser Missing	40416	80.xx Fuser missing	✓	✓
Intervention Required - Fuser Missing	40416	87.xx Fuser missing	✗	✗
Intervention Required - Insert Duplex Pages in Tray [x]	41202	Reload printed pages in Tray [x]	✗	✗

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

PJL messages for paper handling

✓ = Supported ✗ = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Tray [x] Empty	11xyy	Tray [paper source #] Empty	✗	✗
Intervention Required - Tray [x] Missing	12x01	Tray [paper source #] Missing	✗	✗
Intervention Required - Bin [x] Full	15ww1	Bin [Bin #] Full	✗	✗
Intervention Required - Short Paper	30034	34 Incorrect paper size, open [paper source]	✓	✓

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Wrong Paper Size in Tray [x]	30034	34 Wrong Paper Size in Tray [x]	X	X
Intervention Required - Wrong Paper Size Manual Feed	30034	34 Wrong Paper Size Manual Feed	X	X
Intervention Required - Remove Paper [All Output Bins]	40019	Remove paper from all bins	✓	✓
Intervention Required - Remove Paper From All Bins	40019	Remove paper from all bins	X	X
Intervention Required - Remove Paper From Output Bin [x]	40019	Remove paper from bin [x]	✓	✓
Intervention Required - Remove Paper Output Bin [bin #]	40019	Remove Paper Output Bin [bin #]	X	X
Intervention Required - Remove Paper [linked set bin name]	40019	Remove paper from [linked set bin name]	✓	✓
Intervention Required - Remove Paper [linked set bin name]	40019	Remove Paper [linked set bin name]	X	X
Intervention Required - Remove Paper From Standard Output Bin	40019	Remove paper from standard output bin	✓	✓
Intervention Required - Remove Paper Standard Bin	40019	Remove Paper Standard Bin	X	X
Intervention Required - Photoconductor Exposure Warning	40025	Photoconductor exposure warning	X	X
Intervention Required - Check [Paper Source] Orientation or Guides	4100x	Check [paper source] orientation or guides	X	X

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Check [Paper Source] Paper Guide	4100x	Check [paper source] Paper Guide	X	X
Intervention Required - Incorrect Media	41xy	Paper changes needed	✓	✓
Intervention Required - Load [paper source] [Custom Type Name]	41xyy	Load [paper source] with [Custom Type Name]	✓	✓
Intervention Required - Load [paper source] [Custom String]	41xyy	Load [paper source] with [Custom String]	✓	✓
Intervention Required - Load [paper source] [paper size]	41xyy	Load [paper source] with [paper size]	✓	✓
Intervention Required - Load [paper source] [paper type] [paper size]	41xyy	Load [paper source] with [paper type] [paper size]	✓	✓
Intervention Required - Load Manual Request	41xyy	Load Manual Feeder with [Custom Type Name]	✓	✓
Intervention Required - Load Manual Request	41xyy	Load Manual Feeder with [Custom String]	✓	✓
Intervention Required - Load Manual Request	41xyy	Load Manual Feeder with [paper size]	✓	✓
Intervention Required - Load Manual Request	41xyy	Load Manual Feeder with [paper type] [paper size]	✓	✓
Intervention Required - Load Manual [Custom Type Name]	41xyy	Load single sheet feeder with [Custom Type Name]	X	X

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Load Manual [Custom String]	41xxy	Load single sheet feeder with [Custom String]	X	X
Intervention Required - Load Manual [paper size]	41xxy	Load single sheet feeder with [paper size]	X	X
Intervention Required - Load Manual [paper type] [paper size]	41xxy	Load single sheet feeder with [paper type] [paper size]	X	X
Intervention Required - Change Request	41xxy	Change [paper source] to [Custom Type Name]	✓	✓
Intervention Required - Change Request	41xxy	Change [paper source] to [Custom Type Name], load [orientation]	✓	✓
Intervention Required - Change Request	41xxy	Change [paper source] to [Custom String]	✓	✓
Intervention Required - Change Request	41xxy	Change [paper source] to [Custom String] load [orientation]	✓	✓
Intervention Required - Change Request	41xxy	Change [paper source] to [paper type] [paper size]	✓	✓
Intervention Required - Change Request	41xxy	Change [paper source] to [paper type] [paper size] load [orientation]	✓	✓

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Load Manual Request	41xxxy	Load Manual Feeder with [Custom Type Name]	X	X
Intervention Required - Load Manual Request	41xxxy	Load Manual Feeder with [Custom String]	X	X
Intervention Required - Load Manual Request	41xxxy	Load Manual Feeder with [paper size]	X	X
Intervention Required - Load Manual Request	41xxxy	Load Manual Feeder with [paper type] [paper size]	X	X
Intervention Required - Incorrect Media	41xyy	34 Incorrect Media	X	X
Intervention Required - Insert Duplex Pages & Press Go.	412yy	Insert Duplex Pages & Press Go.	X	X
Intervention Required - Insert Tray [x]	4300x	Insert tray [x]	✓	✓
Intervention Required - Insert Tray Request	4300x	Insert Tray [x]	X	X

PJL messages for paper jams

✓ = Supported X = Not supported		Printer model	
Message	Status code	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Paper Jam	4200x	X	X
Intervention Required - Paper Jam	4200z	✓	✓
Intervention Required - Paper Jam	4201x	X	X
Intervention Required - Paper Jam	4201z	✓	✓
Intervention Required - Paper Jam	4202x	X	X
Intervention Required - Paper Jam	4202z	✓	✓
Intervention Required - Paper Jam	4203x	X	X
Intervention Required - Paper Jam	4203z	✓	✓
Intervention Required - Paper Jam	4204x	X	X
Intervention Required - Paper Jam	4205x	X	X
Intervention Required - Paper Jam	4206x	X	X
Intervention Required - Paper Jam	4207x	X	X
Intervention Required - Paper Jam	4208x	X	X
Intervention Required - Paper Jam	4209x	X	X
<p>w indicates that this message includes a letter indicating a door or cover that needs to be opened. x represents the number of jammed pages in the printer. y represents the tray number. z represents the bin number.</p>			

✓ = Supported X = Not supported		Printer model	
Message	Status code	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Paper Jam	4210x	X	X
Intervention Required - Paper Jam	4211x	X	X
Intervention Required - Paper Jam	4220x	X	X
Intervention Required - Paper Jam	4221x	X	X
Intervention Required - Paper Jam	4222x	X	X
Intervention Required - Paper Jam	4230x	X	X
Intervention Required - Paper Jam	4230z	✓	✓
Intervention Required - Paper Jam	4231x	X	X
Intervention Required - Paper Jam	4231z	X	X
Intervention Required - Paper Jam	4232x	X	X
Intervention Required - Paper Jam	4233x	X	X
Intervention Required - Paper Jam	4234	X	X
Intervention Required - Paper Jam	424yx	X	X
Intervention Required - Paper Jam	424xz	✓	✓
Intervention Required - Paper Jam	4241wy	X	X

w indicates that this message includes a letter indicating a door or cover that needs to be opened.
x represents the number of jammed pages in the printer.
y represents the tray number.
z represents the bin number.

✓ = Supported X = Not supported		Printer model	
Message	Status code	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Paper Jam	4241z	X	X
Intervention Required - Paper Jam	4242wy	X	X
Intervention Required - Paper Jam	4242z	X	X
Intervention Required - Paper Jam	4243w	X	X
Intervention Required - Paper Jam	4243z	X	X
Intervention Required - Paper Jam	4244wy	X	X
Intervention Required - Paper Jam	4244z	X	X
Intervention Required - Paper Jam	4245w	X	X
Intervention Required - Paper Jam	4246w	X	X
Intervention Required - Paper Jam	4247wy	X	X
Intervention Required - Paper Jam	4248w	X	X
Intervention Required - Paper Jam	4249w	X	X
Intervention Required - Paper Jam	4250w	X	X
Intervention Required - Paper Jam	4250x	X	X
Intervention Required - Paper Jam	4250z	✓	✓

w indicates that this message includes a letter indicating a door or cover that needs to be opened.
x represents the number of jammed pages in the printer.
y represents the tray number.
z represents the bin number.

✓ = Supported X = Not supported		Printer model	
Message	Status code	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Paper Jam	4251wy	X	X
Intervention Required - Paper Jam	4251x	X	X
Intervention Required - Paper Jam	4252w	X	X
Intervention Required - Paper Jam	4253w	X	X
Intervention Required - Paper Jam	4254wy	X	X
Intervention Required - Paper Jam	4255	X	X
Intervention Required - Paper Jam	4256w	X	X
Intervention Required - Paper Jam	4257w	X	X
Intervention Required - Paper Jam	4258w	X	X
Intervention Required - Paper Jam	4259wy	X	X
Intervention Required - Paper Jam	4260w	X	X
Intervention Required - Paper Jam	4260x	X	X
Intervention Required - Paper Jam	4260z	X	X
Intervention Required - Paper Jam	4261w	X	X
Intervention Required - Paper Jam	4261x	X	X

w indicates that this message includes a letter indicating a door or cover that needs to be opened.
x represents the number of jammed pages in the printer.
y represents the tray number.
z represents the bin number.

✓ = Supported X = Not supported		Printer model	
Message	Status code	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Paper Jam	427xz	✓	✓
Intervention Required - Paper Jam	427zx	X	X
Intervention Required - Paper Jam	4271	X	X
Intervention Required - Paper Jam	4271z	X	X
Intervention Required - Paper Jam	4272	X	X
Intervention Required - Paper Jam	4272z	X	X
Intervention Required - Paper Jam	4273	X	X
Intervention Required - Paper Jam	4280w	X	X
Intervention Required - Paper Jam	4280x	X	X
Intervention Required - Paper Jam	4280z	✓	✓
Intervention Required - Paper Jam	4281w	X	X
Intervention Required - Paper Jam	4281x	X	X
Intervention Required - Paper Jam	4281z	X	X
Intervention Required - Paper Jam	4282w	X	X
Intervention Required - Paper Jam	4282x	X	X

w indicates that this message includes a letter indicating a door or cover that needs to be opened.
x represents the number of jammed pages in the printer.
y represents the tray number.
z represents the bin number.

✓ = Supported X = Not supported		Printer model	
Message	Status code	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Paper Jam	4282z	X	X
Intervention Required - Paper Jam	4283w	X	X
Intervention Required - Paper Jam	4283x	X	X
Intervention Required - Paper Jam	4283z	✓	✓
Intervention Required - Paper Jam	4284w	X	X
Intervention Required - Paper Jam	4284x	X	X
Intervention Required - Paper Jam	4284z	X	X
Intervention Required - Paper Jam	4285w	X	X
Intervention Required - Paper Jam	4285z	X	X
Intervention Required - Paper Jam	4286w	X	X
Intervention Required - Paper Jam	4286z	X	X
Intervention Required - Paper Jam	4287	X	X
Intervention Required - Paper Jam	4287z	X	X
Intervention Required - Paper Jam	4288	X	X
Intervention Required - Paper Jam	4288z	X	X

w indicates that this message includes a letter indicating a door or cover that needs to be opened.
x represents the number of jammed pages in the printer.
y represents the tray number.
z represents the bin number.

✓ = Supported X = Not supported		Printer model	
Message	Status code	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Intervention Required - Paper Jam	4289	X	X
Intervention Required - Paper Jam	4289z	X	X
Intervention Required - Paper Jam	4290	X	X
Intervention Required - Paper Jam	4291	X	X
Intervention Required - Paper Jam	4292	X	X
Intervention Required - Paper Jam	4293	X	X
Intervention Required - Paper Jam	4294	X	X
Intervention Required - Paper Jam	4295	X	X
w indicates that this message includes a letter indicating a door or cover that needs to be opened. x represents the number of jammed pages in the printer. y represents the tray number. z represents the bin number.			

Service errors

✓ = Supported X = Not supported		Printer model	
Message	Error code	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
ALL SERVICE MESSAGES	50000	X	X

Device attendance messages

✓ = Supported X = Not supported	Printer model	
Message	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
RDYMSG	✓	✓
OPMSG	✓	✓
STMSG	✓	✓

Lexmark-unique PJL commands

These commands are Lexmark extensions which have been added to the PJL command set to provide the user with remote control of many printer functions.

✓ = Supported X = Not supported	Printer model	
Command	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
LBEEP	✓	✓
LPORTROTATE	✓	✓
LPRINT testpage	✓	✓
• LPRINTDIRECTORY	✓	✓
• LPRINTTESTPAGE	✓	✓
• LPRINTMENUS	✓	✓
• LPRINTPCLFONTS	✓	✓
• LPRINTPSFONTS	✓	✓
LESCAPECHAR	✓	✓
LFAX PHONENUMBER	x	✓
LOPENFILE	✓	✓
LCLOSEFILE	✓	✓
LREADFILE	✓	✓
LWRITEFILE	✓	✓

✓ = Supported X = Not supported	Printer model	
Command	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
LRUNFILE	✓	✓
LRENAMEFILE	✓	✓
LDELETEFILE	✓	✓
LFORMAT	✓	✓
LDEFrag	✓	✓

File and device protection commands

✓ = Supported X = Not supported	Printer model	
Command	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
LBYPASSPASSWORD KEY	✓	✓
LDECLARE LRESOURCE	✓	✓
LDELETEPASSWORD	✓	✓
LQUERYSEED	✓	✓

Appendix C: PostScript support

Supplemental operators

Operator name	C792e, C792de, C792dte, C792dhe	Printer model
appletalktype	✓	✓
buildtime	✓	✓
byteorder	✓	✓
checkpassword	✓	✓
currentfilenameextend	✓	✓
currentmanualduplexmode	✓	✓
currentuniversalsize	✓	✓
default timeouts	x	x
deletefile	✓	✓
devcontrol	✓	✓
devdismount	✓	✓
devforall	✓	✓
devformat	✓	✓
devmount	✓	✓
devstatus	✓	✓
diskonline	✓	✓
diskstatus	✓	✓
displayoperatormsg	✓	✓
doidlefonts	✓	✓
dojamrecovery	✓	✓
doprinterrors	✓	✓
doret	x	x

✓ = Supported X = Not supported	Printer model	
Operator name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
dostartpage	✓	✓
dosysstart	✓	✓
duplexer	✓	✓
duplexmode	✓	✓
enginesync	✓	✓
file	✓	✓
filenameforall	✓	✓
fileposition	✓	✓
firstside	✓	✓
fontnonzerowinding	✓	✓
hardwareiomode	✓	✓
idlefonts	✓	✓
ignoresize	✓	✓
initializedisk	✓	✓
jobname	✓	✓
jobsource	✓	✓
jobtimeout	x	x
manualfeed	✓	✓
manualfeedtimeout	x	x
newsheet	✓	✓
pagecount	✓	✓
pagesprinted	✓	✓
papertray	✓	✓
printername	✓	✓
product	✓	✓
PS2fonts	✓	✓

✓ = Supported X = Not supported	Printer model	
Operator name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
PS3fonts	✓	✓
quiet	✓	✓
ramsize	✓	✓
realformat	✓	✓
renamefile	✓	✓
resolution	✓	✓
revision	✓	✓
sccbatch	✓	✓
sccinteractive	✓	✓
setcoverpage	x	x
setdefault timeouts	✓	✓
setdoidlefonts	✓	✓
setdojamrecovery	✓	✓
setdoprinterrors	✓	✓
setdoret	x	x
setdosstartpage	✓	✓
setdosysstart	✓	✓
setduplexmode	✓	✓
setenginesync	✓	✓
setethernetaddress	✓	✓
setfilenameextend	✓	✓
setfileposition	✓	✓
sethardwareiomode	✓	✓
setidlefonts	✓	✓
setignoresize	✓	✓
setjobtimeout	x	x

✓ = Supported X = Not supported	Printer model	
Operator name	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
setmanualduplexmode	✓	✓
setpapertray	✓	✓
setprintername	✓	✓
setquiet	✓	✓
setresolution	✓	✓
setsccbatch	✓	✓
setsccinteractive	✓	✓
setsoftwareiomode	✓	✓
settumble	✓	✓
setuniversalsize	✓	✓
setuserdiskpercent	✓	✓
softwareiomode	✓	✓
tumble	✓	✓
userdiskpercent	✓	✓
waittimeout	x	x

Page device parameters

✓ = Supported X = Not supported	Printer model	
Key	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
BeginPage	✓	✓
Collate	✓	✓
DeferredMediaSelection	✓	✓
DeviceRenderingInfo	✓	✓
• Screening	x	x

✓ = Supported X = Not supported	Printer model	
Key	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
- ColorGrade	X	X
- PictureGrade	X	X
- IET	X	X
- IETImagesOnly	X	X
- IETPictureGrade	X	X
- None	X	X
• TonerSaver	✓	✓
• PictureGrade	X	X
• ImageEnhancement	X	X
• ImageEnhancementType	X	X
• PrintDarkness	✓	✓
• AutoMediaType	✓	✓
• EdgeToEdge	✓	✓
• DefaultPoliciesPageSize	X	X
• SubstituteSize	✓	✓
• LineDetail	✓	✓
• Type	✓	✓
• ColorCorrection	✓	✓
• ColorBalance	✓	✓
• ColorSaver	✓	✓
• ImageBrightness	X	X
• Imageess	✓	✓
• ImageContrast	✓	✓
• ImageSaturation	✓	✓
• ManualColor	✓	✓
• PrintQuality	X	X
Duplex	✓	✓

✓ = Supported X = Not supported	Printer model	
Key	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
EndPage	✓	✓
ExitJamRecovery	✓	✓
HWResolution	✓	✓
ImagingBBox	✓	✓
InputAttributes	✓	✓
• 0 - Tray 1	✓	✓
• 1 - Tray 2	✓	✓
• 2 - Envelope Feeder	✓	✓
• 3 - Tray 3	✓	✓
• 4 - Multipurpose Feeder	✓	✓
• 5 - Tray 4	✓	✓
• 6 - Tray 5	✓	✓
- PageSize	✓	✓
- MatchAll	✓	✓
- MediaColor	✓	✓
- MediaType	✓	✓
- MediaWeight	✓	✓
- InputLocation	✓	✓
• Mode	✓	✓
• Priority	✓	✓
Install	✓	✓
Jog	✓	✓
ManualFeed	✓	✓
ManualFeedTimeout	✓	✓
MediaColor	✓	✓
MediaPosition	✓	✓

✓ = Supported X = Not supported	Printer model	
Key	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
MediaType	✓	✓
MediaWeight	✓	✓
NumCopies	✓	✓
Nup	✓	✓
NupDetails	✓	✓
• Rows	✓	✓
• Columns	✓	✓
• Orientation	✓	✓
• Border	✓	✓
• Order	✓	✓
• Type	✓	✓
• LandscapeOverride	✓	✓
OutputAttributes	✓	✓
• 0 - Standard Bin	✓	✓
• 1 - Optional Bin 1	✓	✓
• 2 - Optional Bin 2	✓	✓
• 3 - Optional Bin 3	✓	✓
• 4 - Optional Bin 4	✓	✓
• 5 - Optional Bin 5	✓	✓
• 6 - Optional Bin 6	X	X
• 7 - Optional Bin 7	X	X
• 8 - Optional Bin 8	X	X
• 9 - Optional Bin 9	X	X
• 10 - Optional Bin 10	X	X
- OutputType	✓	✓
- OutputLocation	✓	✓

Key	Printer model
✓ = Supported	
X = Not supported	
C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
- PunchModesSupported	✓
• Priority	✓
OutputPage	✓
OutputType	✓
PageDeviceName	✓
PageSize	✓
Policies	✓
• PageSize	✓
• PolicyNotFound	✓
• PolicyReport	✓
PostRenderingEnhance	X
PostRenderingEnhanceDetails	X
• REValue	X
• Type	X
PowerSave	✓
ProcessColorModel	X
Punch	✓
SlipSheet	✓
SlipSheetDetails	✓
• SlipSheetSource	✓
• Type	✓
Staple	✓
TraySwitch	✓
Tumble	✓
UniversalDetails	✓
• Type	✓

✓ = Supported X = Not supported		Printer model	
Key		C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
• PageSize		✓	✓
• Orientation		✓	✓
• Prompt		✓	✓

User interpreter parameters

✓ = Supported X = Not supported		Printer model	
Key	Default	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
AccurateScreens	false	✓	✓
CollatedCopies	Collation - Collated Copies (QTY) value	✓	✓
HalftoneMode	0	✓	✓
IdiomRecognition	true	✓	✓
JobName	()	✓	✓
JobTimeout	JobTimeout system parameter	✓	✓
MaxDictStack	255	✓	✓
MaxExecStack	10015	✓	✓
MaxFontItem	12500	✓	✓
MaxFormItem	100000	✓	✓
MaxLocalVM	2147483647	✓	✓
MaxOpStack	100000	✓	✓
MaxPatternItem	20000	✓	✓
MaxScreenItem	48000	✓	✓
MaxSuperScreen	1024	✓	✓
MaxUPathItem	5000	✓	✓

✓ = Supported X = Not supported		Printer model	
Key	Default	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
MinFontCompress	2147483647	✓	✓
PageCount	0	✓	✓
UseOldcopypage	false	✓	✓
VMReclaim	0	✓	✓
VMThreshold	25000 per MB of RAM	✓	✓
WaitTimeout	WaitTimeout system parameter	✓	✓

System interpreter parameters

✓ = Supported X = Not supported		Printer model	
Key		C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
BuildTime		✓	✓
ByteOrder		✓	✓
CurDisplayList		✓	✓
CurFontCache		✓	✓
CurFormCache		✓	✓
CurInputDevice		✓	✓
CurOutlineCache		✓	✓
CurOutputDevice		✓	✓
CurPatternCache		✓	✓
CurScreenStorage		✓	✓
CurSourceList		✓	✓
CurUPathCache		✓	✓
DisableFastProcs		✓	✓
DoPrintErrors		✓	✓

Key	Printer model
DoStartPage	✓
EnableExtraFonts	✓
EngineBoot	✓
EngineCode	✓
EngineSpeed	✓
EnvironmentSave	✓
FactoryDefaults	✓
FatalErrorAddress	✓
FontResourceDir	✓
FontVersion	✓
GenericResourceDir	✓
GenericResourcePathSep	✓
InstalledRam	✓
JobTimeout	✓
languagelevel	✓
MaxDisplayList	✓
MaxDisplayAndSourceList	✓
MaxFontCache	✓
MaxFormCache	✓
MaxImageBuffer	✓
MaxOutlineCache	✓
MaxPatternCache	✓
MaxPermanentVM	✓
MaxRasterMemory	✓
MaxScreenStorage	✓
MaxSourceList	✓

Key	Printer model
MaxUPathCache	✓
PageCount	✓
PanelCode	✓
PrinterCode	✓
PrinterName	✓
RamSize	✓
RealFormat	✓
Revision	✓
SearchBuiltInFontsFirst	✓
SerialNumber	✓
StartJobPassword	✓
StartupMode	✓
StaticRamSize	✓
SystemParamsPassword	✓
UseOldcopypage	✓
UseOldfonts	✓
ValidNV	✓
WaitTimeout	✓

Devices supported

Device	Printer model
%AppSocketA%	✓
%AppSocketB%	✓

✓ = Supported X = Not supported	Printer model	
Device	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
%AppSocketC%	✓	✓
%AppSocketD%	✓	✓
%EthernetPhysicalA%	✓	✓
%EthernetPhysicalB%	✓	✓
%EthernetPhysicalC%	✓	✓
%EthernetPhysicalD%	✓	✓
%EtherTalkA%	✓	✓
%EtherTalkB%	✓	✓
%EtherTalkC%	✓	✓
%EtherTalkD%	✓	✓
%IP_A%	✓	✓
%IP_B%	✓	✓
%IP_C%	✓	✓
%IP_D%	✓	✓
%IR_A%	X	X
%IR_B%	X	X
%IR_C%	X	X
%IR_D%	X	X
%LexLinkA%	X	X
%LexLinkB%	X	X
%LexLinkC%	X	X
%LexLinkD%	X	X
%LocalTalkA%	✓	✓
%LocalTalkB%	✓	✓
%LocalTalkC%	✓	✓
%LocalTalkD%	✓	✓
%LPR_A%	✓	✓

✓ = Supported X = Not supported	Printer model	
Device	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
%LPR_B%	✓	✓
%LPR_C%	✓	✓
%LPR_D%	✓	✓
%ParallelA%	✓	✓
%ParallelB%	✓	✓
%ParallelC%	✓	✓
%ParallelD%	✓	✓
%PrintServerA%	✓	✓
%PrintServerB%	✓	✓
%PrintServerC%	✓	✓
%PrintServerD%	✓	✓
%RemotePrinterA%	✓	✓
%RemotePrinterB%	✓	✓
%RemotePrinterC%	✓	✓
%RemotePrinterD%	✓	✓
%SerialA%	✓	✓
%SerialB%	✓	✓
%SerialC%	✓	✓
%SerialD%	✓	✓
%TokenRingPhysicalA%	X	X
%TokenRingPhysicalB%	X	X
%TokenRingPhysicalC%	X	X
%TokenRingPhysicalD%	X	X
%TokenTalkA%	X	X
%TokenTalkB%	X	X
%TokenTalkC%	X	X
%TokenTalkD%	X	X

✓ = Supported X = Not supported	Printer model	
Device	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
%USB_A%	✓	✓
%USB_B%	✓	✓
%USB_C%	✓	✓
%USB_D%	✓	✓

Device parameters

✓ = Supported X = Not supported	Printer model	
Key	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
Device Parameters for the Communication Device %Parallel%, %ParallelA%, %ParallelB%, %ParallelC%, %ParallelD%		
DelayedOutputClose	✓	✓
Enabled	✓	✓
Filtering	✓	✓
Handshake	✓	✓
HasNames	✓	✓
Interpreter	✓	✓
On	✓	✓
OutputDevice	✓	✓
PCLSmartSwitch	✓	✓
PortLocation	✓	✓
PSSmartSwitch	✓	✓
Type	✓	✓
Device Parameters for the Communication Device %Serial%, %SerialA%, %SerialB%, %SerialC%, %SerialD%		
Baud	✓	✓

✓ = Supported X = Not supported	Printer model	
Key	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
CheckParity	✓	✓
DataBits	✓	✓
DelayedOutputClose	✓	✓
Enabled	✓	✓
Filtering	✓	✓
FlowControl	✓	✓
HasNames	✓	✓
HonorDSR	✓	✓
Interpreter	✓	✓
On	✓	✓
Parity	✓	✓
PCLSmartSwitch	✓	✓
PortLocation	✓	✓
PSSmartSwitch	✓	✓
RobustXon	✓	✓
SerialMode	✓	✓
StopBits	✓	✓
Type	✓	✓
Device Parameters for the Communication Device %LocalTalk%, %LocalTalkA%, %LocalTalkB%, %LocalTalkC%, %LocalTalkD%		
DelayedOutputClose	✓	✓
Enabled	✓	✓
Filtering	✓	✓
HasNames	✓	✓
Interpreter	✓	✓
LocalTalkType	✓	✓

✓ = Supported X = Not supported	Printer model	
Key	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
NodeID	✓	✓
On	✓	✓
PCLSmartSwitch	✓	✓
PortLocation	✓	✓
PSSmartSwitch	✓	✓
Type	✓	✓
Device Parameters for the Communication Device %EtherTalk%, %EtherTalkA%, %EtherTalkB%, %EtherTalkC%, %EtherTalkD%		
DelayedOutputClose	✓	✓
Enabled	✓	✓
EthernetAddress	✓	✓
EtherTalkType	✓	✓
EtherTalkZone	✓	✓
Filtering	✓	✓
HasNames	✓	✓
Interpreter	✓	✓
NodeID	✓	✓
On	✓	✓
PCLSmartSwitch	✓	✓
PortLocation	✓	✓
PSSmartSwitch	✓	✓
Type	✓	✓
Device Parameters for the Communication Device %IR%, %IR_A%, %IR_B%, %IR_C%, %IR_D%		
DelayedOutputClose	X	X
Enabled	X	X
Filtering	X	X

Key	Printer model
HasNames	X
Interpreter	X
On	X
PCLSmartSwitch	X
PortLocation	X
PSSmartSwitch	X
Type	X
Device Parameters for the Communication Device %USB%, %USB_A%, %USB_B%, %USB_C%, %USB_D%	
DelayedOutputClose	✓
Enabled	✓
Filtering	✓
HasNames	✓
Interpreter	✓
On	✓
PCLSmartSwitch	✓
PortLocation	✓
PSSmartSwitch	✓
Type	✓
Device Parameters for the Communication Device %TokenTalk%, %TokenTalkA%, %TokenTalkB%, %TokenTalkC%, %TokenTalkD%	
Address	X
Bridging	X
DelayedOutputClose	X
Enabled	X
Filtering	X
HasNames	X
Interpreter	X
NodeID	X
On	X

Key	Printer model
✓ = Supported	
X = Not supported	
	C792e, C792de, C792dte, C792dhe
PCLSmartSwitch	X X
PortLocation	X X
PSSmartSwitch	X X
TokenTalkType	X X
Type	X X
Zone	X X
Device Parameters for the Communication Device %AppSocket%, %AppSocketA%, %AppSocketB%, %AppSocketC%, %AppSocketD%	
DelayedOutputClose	✓ ✓
Enabled	✓ ✓
Filtering	✓ ✓
HasNames	✓ ✓
Interpreter	✓ ✓
On	✓ ✓
PortLocation	✓ ✓
Type	✓ ✓
Device Parameters for the Communication Device %RemotePrinter%, %RemotePrinterA%, %RemotePrinterB%, %RemotePrinterC%, %RemotePrinterD%	
DelayedOutputClose	✓ ✓
Enabled	✓ ✓
Filtering	✓ ✓
HasNames	✓ ✓
Interpreter	✓ ✓
On	✓ ✓
PortLocation	✓ ✓
Type	✓ ✓

Key	Printer model
✓ = Supported	
X = Not supported	
Device Parameters for the Communication Device %PrintServer%, PrintServerA%, PrintServerB%, %PrintServerC%, %PrintServerD%	
DelayedOutputClose	✓
Enabled	✓
Filtering	✓
HasNames	✓
Interpreter	✓
On	✓
PortLocation	✓
Type	✓
Device Parameters for the Communication Device %LPR%, %LPR_A%, %LPR_B%, %LPR_C%, %LPR_D%	
Enabled	✓
Filtering	✓
HasNames	✓
Interpreter	✓
On	✓
PortLocation	✓
Type	✓
Device Parameters for the Communication Device %LexLink%, %LexLinkA%, %LexLinkB%, %LexLinkC%, %LexLinkD%	
DelayedOutputClose	X
Enabled	X
HasNames	X
Interpreter	X
On	X
PortLocation	X
Type	X

Key	Printer model
✓ = Supported	
X = Not supported	
Device Parameters for the Communication Device %IP%, %IP_A%, %IP_B%, %IP_C%, %IP_D%	
GatewayAddress	✓
IPAddress	✓
IPAddressDynamic	✓
NetworkMask	✓
On	✓
Physical	✓
PortLocation	✓
Type	✓
Device Parameters for the Communication Device %EthernetPhysical%, %EthernetPhysicalA%, %EthernetPhysicalB%, %EthernetPhysicalC%, %EthernetPhysicalD%	
EthernetAddress	✓
On	✓
PortLocation	✓
Type	✓
Device Parameters for the Communication Device %TokenRingPhysical%, %TokenRingPhysicalA%, %TokenRingPhysicalB%, %TokenRingPhysicalC%, %TokenRingPhysicalD%	
Address	X
On	X
PortLocation	X
Speed	X
Type	X
Device Parameters for the Parameters Device %Engine%	
BSizeStandard	✓
Darkness	X
PageCount	✓

✓ = Supported X = Not supported	Printer model	
Key	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
TimeToStandby	✓	✓
Type	✓	✓
Device Parameters for the Parameters Device %Console%		
Language	✓	✓
Type	✓	✓
Device Parameters for the Parameters Device %Calendar%, %CalendarA%, %CalendarB%, %CalendarC%, %CalendarD%		
Day	✓	✓
Hour	✓	✓
Minute	✓	✓
Month	✓	✓
Running	✓	✓
Second	✓	✓
Type	✓	✓
Year	✓	✓
DateTime	✓	✓
DayOfWeekLong	✓	✓
DayOfWeekNum	✓	✓
DayOfWeekShort	✓	✓
Device Parameters for the Parameters Device %disk1%		
BlockSize	✓	✓
Free	✓	✓
HasNames	✓	✓
InitializeAction	✓	✓
LogicalSize	✓	✓
Mounted	✓	✓

✓ = Supported X = Not supported	Printer model	
Key	C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
PhysicalSize	✓	✓
Removable	✓	✓
Searchable	✓	✓
SearchOrder	✓	✓
Type	✓	✓
Writable	✓	✓
Device Parameters for the Parameters Device %flash1%		
BlockSize	✓	✓
Free	✓	✓
HasNames	✓	✓
InitializeAction	✓	✓
LogicalSize	✓	✓
Mounted	✓	✓
PhysicalSize	✓	✓
Removable	✓	✓
Searchable	✓	✓
SearchOrder	✓	✓
Type	✓	✓
Writable	✓	✓
Device Parameters for the Parameters Device %rom%		
BlockSize	✓	✓
Free	✓	✓
HasNames	✓	✓
InitializeAction	✓	✓
LogicalSize	✓	✓
Mounted	✓	✓

✓ = Supported X = Not supported		Printer model	
Key		C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
PhysicalSize		✓	✓
Removable		✓	✓
Searchable		✓	✓
SearchOrder		✓	✓
Type		✓	✓
Writable		✓	✓

PostScript message keys commands

✓ = Supported X = Not supported		Printer model	
Key		C792e, C792de, C792dte, C792dhe	X792de, X792dte, X792dtfe, X792dtpe, X792dtme, X792dtse
job		✓	✓
status		✓	✓
source		✓	✓

Index

A

air temperature ranges
cartridges 22
printer with cartridges 22
airflow requirement 19
altitude specifications 23
ambient operating environment 22
atmospheric pressure 23

C

clearance requirements 22
commands
PJL, file and device protection 89
PJL, Lexmark-unique 88
PostScript, message keys 113
commands supported
GL/2 31
PJL, common variables for both languages 35
PJL, Lexmark-unique variables for both languages 37
PJL, Lexmark-unique variables for LRESOURCE 49
PJL, Lexmark-unique variables for PCL emulation 48
PJL, Lexmark-unique variables for PostScript emulation 49
PJL, Status Readback 50
PJL, USTATUS variables 50
commands, supported
PCL emulation 25
PJL, common variables for PCL emulation 48
PJL, common variables for PostScript emulation 49

D

devices supported
PostScript 101
dimensions, printer 21

E

electrical specifications 20
envelope sizes
support in PostScript 15
envelope sizes supported
Lexmark C792 10

Lexmark X792 10
envelope tray support
PostScript operators 17
environmental conditions 22
errors
PJL, service 87

F

finding more information about the printer 7

G

GL/2
commands supported 31

H

humidity ranges 22

L

letter meanings 5
logical page
PCL emulation 9

M

meanings, letters after model number 5
messages
PJL, attendance conditions 58
PJL, auto-continuable conditions 51
PJL, device attendance 88
PJL, paper handling 76
PJL, paper jams 81
model numbers
understanding letters 5

N

noise emission levels 19

O

operators, envelope sizes
PostScript 15

P

page, printable
PCL emulation 9

paper sizes supported

Lexmark C792 10
Lexmark X792 10
paper sizes, PostScript
supported by printer 13
paper tray
operators, PostScript 14, 15
support in PostScript 14

parameters

PostScript, device 104
PostScript, page device 93
PostScript, system interpreter 99
PostScript, user interpreter 98
PCL emulation
supported commands 25

PCL emulation, paper and envelope dimensions

Lexmark C792 10
Lexmark X792 10
physical page
PCL emulation 9
physical specifications 21
PJL commands
common variables, both languages 35
common variables, PCL emulation 48
common variables, PostScript emulation 49
file and device protection 89
Lexmark-unique 88

Lexmark-unique variables, both languages 37

Lexmark-unique variables, LRESOURCE 49

Lexmark-unique variables, PCL emulation 48

Lexmark-unique variables, PostScript emulation 49

Status Readback 50
USTATUS variables 50

PJL commands, information location

Printer Languages and Interfaces Technical Reference 12

PJL errors
service errors 87

PJL messages
attendance conditions 58
auto-continuable conditions 51
device attendance 88
paper handling 76
paper jams 81

PostScript
device parameters 104
devices supported 101
operators, envelope sizes 15
page device parameters 93
supplemental operators 90
supported paper sizes 13
tray operators 14

PostScript commands
message keys 113

PostScript operators
envelope tray support 17

PostScript parameters
system interpreter 99
user interpreter 98

power requirements 20

printable areas 9

printer dimensions 21

printer information
where to find 7

printer specifications
airflow requirement 19
altitude 23

atmospheric pressure 23

clearance requirements 22

electrical 20

environmental conditions 22

noise emission levels 19

power requirements 20

publications

where to find 7

R

required clearance 22

S

size, printer 21
supplemental operators
PostScript 90

T

tray operators
PostScript 14

W

weight, printer 21
wet-bulb temperature values 22