

ST122LEA

2-Port VGA Video Splitter with Audio - USB Powered

StarTech.com
Making hard-to-find easy!®

CONVERGEAV


Installation Guide

Packaging Contents

- 1 x ST122LEA video splitter
- 1 x USB power cable
- 1 x Installation Guide

System Requirements

- VGA enabled video source device
- Available USB port on the video source device
- VGA enabled display device
- Analog stereo audio source with 3.5mm mini-jack interface
- Stereo speakers with 3.5mm mini-jack interface

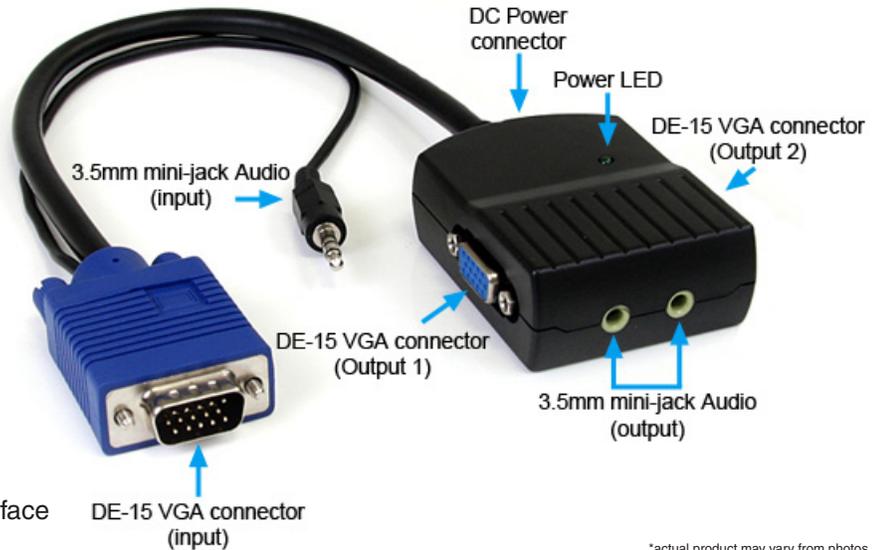

*actual product may vary from photos

Installation

1. Make sure all devices are powered off and unplugged before attempting installation.
2. Connect the male VGA connector on the ST122LEA to the VGA output on the video source device (i.e. computer system).
3. If using audio, connect the integrated 3.5mm mini-jack audio connector to the audio output on the source device.
4. Connect the video display devices (i.e. monitor, projector, etc.) to the female VGA connectors on the ST122LEA, using standard male/male VGA cables.
5. If using audio, connect a set of stereo speakers (or integrated speakers on the display device) using 3.5mm mini-jack audio cables to the splitter unit.

NOTE: Both outputs on the ST122LEA are identical, so the same audio and video will be output.

6. Connect the USB power cable from the DC power connector on the ST122LEA splitter unit to an available USB port on the source device.
7. Power on the display devices and speakers (if applicable).
8. Power on the video source device.

Warranty Information

This product is backed by a one year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Specifications

Video Signal	RGBHV (VGA)
Number of Ports	2
Connectors	2 x DE-15 VGA female 1 x DE-15 VGA male 2 x 3.5mm mini-jack female 1 x 3.5mm mini-jack male 1 x DC power
LEDs	1 x Power
Maximum Video Resolution	2048x1536
Maximum Distance	65m / 213ft
Maximum Video Bandwidth	300MHz
DDC Support	DDC, DDC2, DDCB2 (Port 1 only)
Operating Temperature	0°C ~ 70°C (32°F ~ 158°F)
Storage Temperature	-20°C ~ 85°C (-4°F ~ 185°F)
Humidity	0 ~ 95% RH
Dimensions	68.0mm x 53.0mm x 23.0mm
Weight	115g