

48" Full HD LED Commercial Display

Convenience and Control for Hospitality Environments

CDE4803



Versatility and good looks go hand-in-hand in a display destined to shine in any hospitality environment. Loaded with control, management and connectivity features, the ViewSonic® CDE4803 48" commercial LED display makes it easy to deploy and maintain multiple screens throughout your establishment. From in-room entertainment to eye-catching digital signage to stunning sports coverage, guests will enjoy vibrant multimedia content – while you enjoy the convenience of customizable, automated multi-screen control. Plus, with a sleek finish, slim bezel and optional stand, it's sure to add appeal to any décor.

Key Features:

Integrated USB multimedia player

Free-bundled vController™ software

Hospitality mode for automated multi-screen control

Control multiple devices with HDMI CEC and IR pass-through

Enhanced viewing comfort


Designed for:

Hospitality

Retail

48" Full HD LED Commercial Display

CDE4803

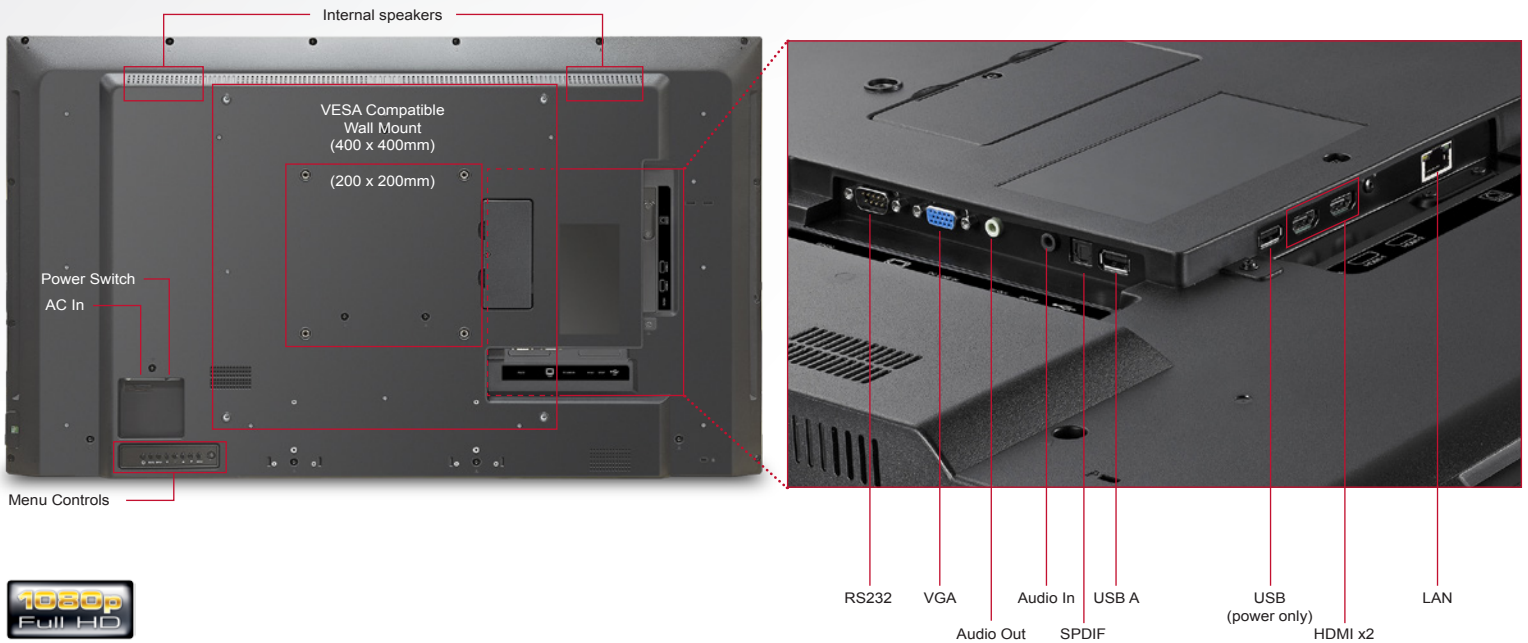

Specifications

PANEL	Type	TFT LCD Module (VA type) with DLED Backlight	
	Display Area	41.5" horizontal x 23.3" vertical; 48" diagonal	
	Optimum Resolution	1920 x 1080	
	Contrast Ratio	4000:1 (typ)	
	Viewing Angles	178° horizontal, 178° vertical	
	Response Time	8ms	
	Light Source	Long life, 30,000 hrs. (typ)	
	Brightness	350 cd/m ²	
	Aspect Ratio	16:9	
	Panel Surface	Anti-glare, 3H scratch resistant	
INPUT	Video Input	HDMI (x2), VGA	
	Control Input	RS232, LAN	
AUDIO OUTPUT	Speakers	Internal 10-watt (x2)	
INPUT SIGNAL	TV/Video Comp	480i, 480p, 720p, 1080i, 1080p	
CONNECTOR	Analog	15-pin mini D-sub (VGA), Audio In, Audio out	
	Digital	HDMI (x2), RJ45, USB, Audio (SPDIF)	
	Power	3-pin plug	
CONTROLS	OSD	Panel	Power, Mute, Input, Vol-, Vol+, Up, Down, Menu
		Picture	Auto Picture, Brightness, Contrast, Color, Advanced settings, Reset picture setting
		Sound	Auto sound, Equalizer, Balance, Reset sound settings
		Clock	Sleep timer, Date/Time
Features	Language, PC settings, Button lock, Remote lock, Monitor ID, Current software info, Reset AV & features		
	USB Menu	Photo, Music, Movie	

POWER	Voltage	AC 100-240V (universal), 50-60Hz
	Consumption	115W (typ)
OPERATING CONDITIONS	Temperature	41-104°F (5-40°C)
	Humidity	20-80% (non-condensing)
DIMENSIONS (W x H x D)	Physical	42.6 x 24.5 x 2.4 in. / 1081.8 x 623.4 x 59.9 mm
	Packaging	46.9 x 30.43 x 6.7 in. / 1192 x 773 x 171 mm
WEIGHT	Net	25.4 lbs / 11.5 kg
	Gross	36.2 lbs / 16.4 kg
WALL MOUNT	VESA®	400 x 400 / 200 x 200 mm
REGULATIONS		CE, CB, ErP, WEEE, C-tick, cTUVus, FCC, ENERGY STAR, Mexico Energy
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
WARRANTY		Three-year limited warranty on parts and labor

Optional Accessories

The Solstice Pod™ SGE - 4 Users	NMP250-WL
The Solstice Pod - Unlimited Users.....	NMP250-WU
Solstice Software™ SGE - 4 Users	SW-51*
Solstice Software - Unlimited Users	SW-50*
Table Top Stand.....	STND-034
VESA Compatible Wall Mount.....	WMK-014

What's in the box?

CDE4803 display, power cable, VGA cable, RS232 cable, remote control with batteries, ViewSonic Wizard CD (User Guide and vController™ software)

*Requires Windows PC. Programs, specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2016 ViewSonic Corporation. All rights reserved. [18227-00B-12/15]



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.