

# WM645B.WM660B

6U 450mm/600mm Depth Wallmount Server Cabinet




## INTRODUCTION

Elegant and secured WM645B/WM660B wall mount cabinet by iStarUSA. The easy side panel access is convenient to perform routine maintenance, but also can be locked to prevent unauthorized access. Three ways, top, bottom, and rear cabling tunnels enable data and cable routing. WM series incorporate optimal cooling design. The partially vented frames and two optional AC fans that can be put on the top panel give the wall-mount cabinet excellent air ventilation. Heat-treated glass door provides extra strength and able to silkscreen logos, marks, and labels to boost product image.


## FEATURES

- A Sturdy and Rugged Welded Frame Structure Comes Pre-Assembled
- B Quick release door: the front door can be easily moved to the opposite side for left-handed or right-handed hinging
- C Three Ways, Top, Bottom, and Rear Cabling Tunnels
- D Air ventilation: partially vented frames and two optional AC fans give the cabinet max air flow
- E Meet IP20 Protection Grade
- F Enforced Strengthen Glass Front Door with Security Key Lock
- G Removable Side Panels with Easy Handy Latches
- H 2.0mm SPCC High-Quality Cold Roll Steel Post; 1.2mm for Enclosure
- I Degreasing, Acidification, Phosphoric, Static Electricity or Powder Coat Surface Finish

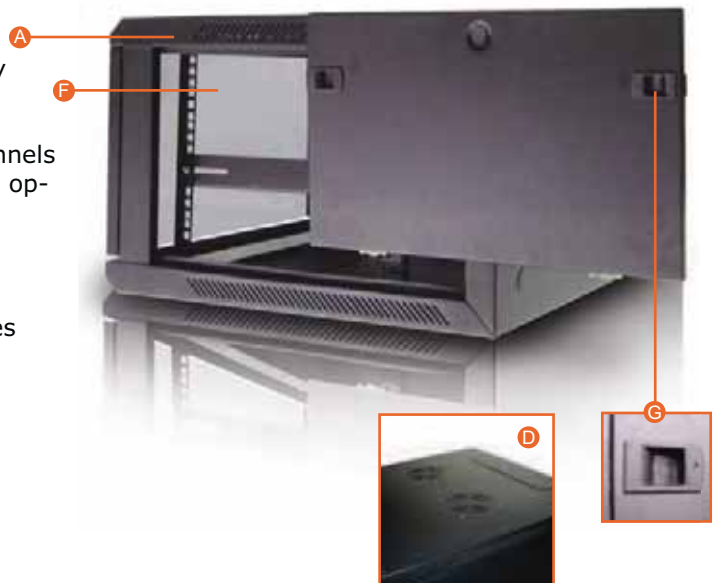

# WM645B.WM660B

## DRAWING

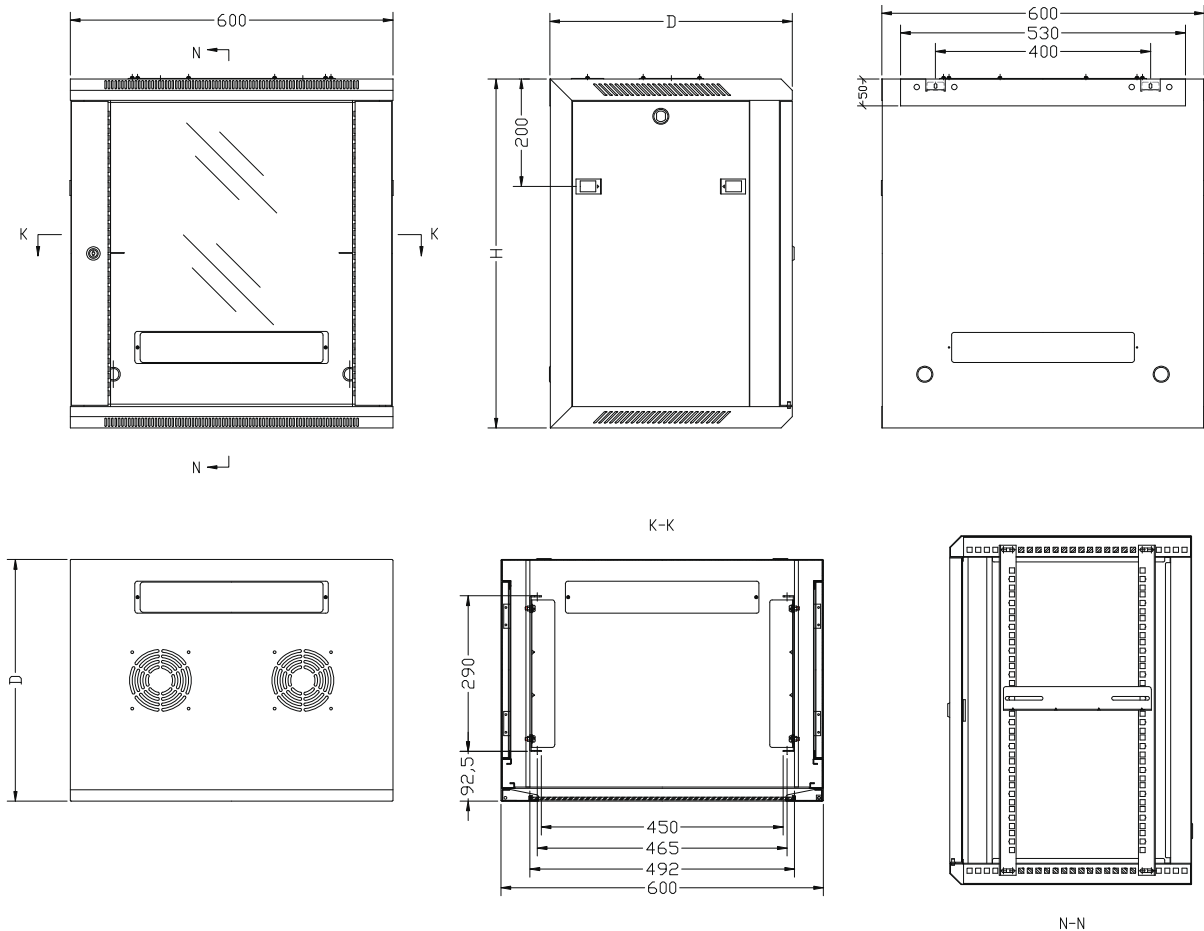

## SPECIFICATIONS

Model Number	WM645B	WM660B
RoHS Compliance Version	Yes	Yes
Rack Units	6U	6U
Dimensions [WxHxD]	600 x368 x 450 mm	600 x 368 x 600 mm
Internal Depth [mm]	420mm	570mm
Security	Front & Rear Locks	Front & Rear Locks
Industry Standard	Accord with ANSI/EIARS-310-D, IEC297, DIN41494, DIN41491, Part7GB/T3047.2-92	Accord with ANSI/EIARS-310-D, IEC297, DIN41494, DIN41491, Part7GB/T3047.2-92
Thickness	2.0mm SPCC High-Quality Cold Roll Steel Post; 1.2mm for Enclosure	
Materials	SPCC High-Quality Cold Roll Steel	
Safety	TUEV	
EMI Noise Filter	CE	

:: Specification and wiring diagram subject to change without notice  
 :: Limited Life Time Warranty  
 :: Last Update: Oct/2007



# WM945B.WM960B

9U 450mm/600mm Depth Wallmount Server Cabinet




## INTRODUCTION

Elegant and secured WM945B/WM960B wall mount cabinet by iStarUSA. The easy side panel access is convenient to perform routine maintenance, but also can be locked to prevent unauthorized access. Three ways, top, bottom, and rear cabling tunnels enable data and cable routing. WM series incorporate optimal cooling design. The partially vented frames and two optional AC fans that can be put on the top panel give the wall-mount cabinet excellent air ventilation. Heat-treated glass door provides extra strength and able to silkscreen logos, marks, and labels to boost product image.


## FEATURES

- A** Sturdy and Rugged Welded Frame Structure Comes Pre-Assembled
- B** Quick release door: the front door can be easily moved to the opposite side for left-handed or right-handed hinging
- C** Three Ways, Top, Bottom, and Rear Cabling Tunnels
- D** Air ventilation: partially vented frames and two optional AC fans give the cabinet max air flow
- E** Meet IP20 Protection Grade
- F** Enforced Strengthen Glass Front Door with Security Key Lock
- G** Removable Side Panels with Easy Handy Latches
- H** 2.0mm SPCC High-Quality Cold Roll Steel Post; 1.2mm for Enclosure
- I** Degreasing, Acidification, Phosphoric, Static Electricity or Powder Coat Surface Finish

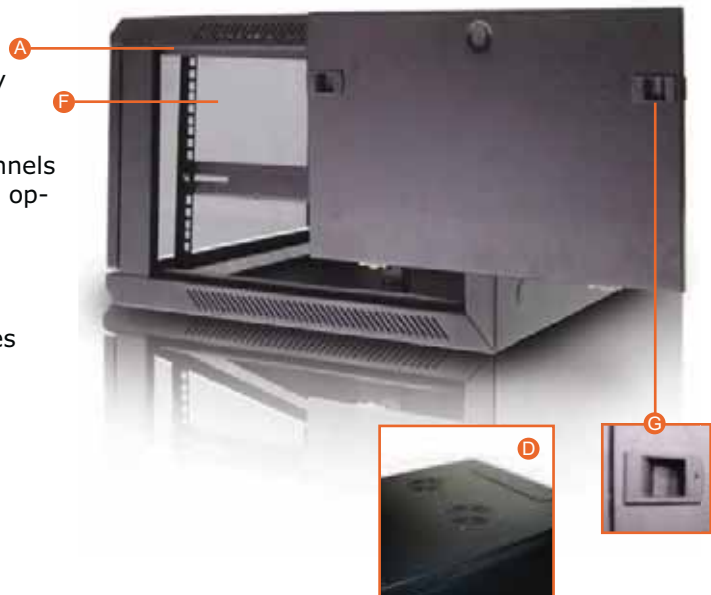

# WM945B.WM960B

## DRAWING

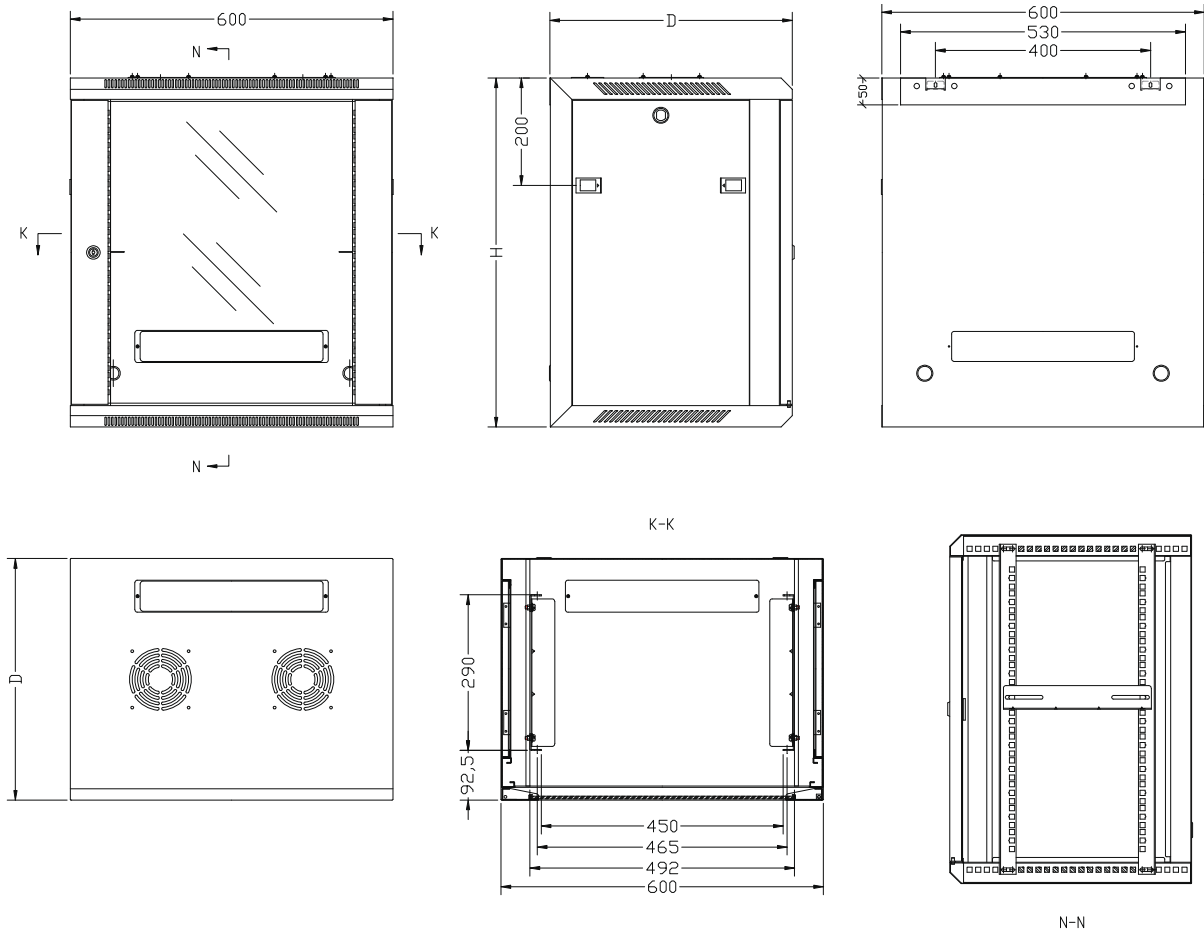

## SPECIFICATIONS

Model Number	WM945B	WM960B
RoHS Compliance Version	Yes	Yes
Rack Units	9U	9U
Dimensions [WxHxD]	600 x 501 x 450 mm	600 x 501 x 600 mm
Internal Depth [mm]	420mm	570mm
Security	Front & Rear Locks	Front & Rear Locks
Industry Standard	Accord with ANSI/EIARS-310-D, IEC297, DIN41494, DIN41491, Part7GB/T3047.2-92	Accord with ANSI/EIARS-310-D, IEC297, DIN41494, DIN41491, Part7GB/T3047.2-92
Thickness	2.0mm SPCC High-Quality Cold Roll Steel Post; 1.2mm for Enclosure	
Materials	SPCC High-Quality Cold Roll Steel	
Safety	TUEV	
EMI Noise Filter	CE	

:: Specification and wiring diagram subject to change without notice  
 :: Limited Life Time Warranty  
 :: Last Update: Oct/2007



# WM1245B.WM1260B

## 12U 450mm/600mm Depth Wallmount Server Cabinet



### INTRODUCTION

Elegant and secured WM1245B/WM1260B wall mount cabinet by iStarUSA. The easy side panel access is convenient to perform routine maintenance, but also can be locked to prevent unauthorized access. Three ways, top, bottom, and rear cabling tunnels enable data and cable routing. WM series incorporate optimal cooling design. The partially vented frames and two optional AC fans that can be put on the top panel give the wall-mount cabinet excellent air ventilation. Heat-treated glass door provides extra strength and able to silkscreen logos, marks, and labels to boost product image.


### FEATURES

- A** Sturdy and Rugged Welded Frame Structure Comes Pre-Assembled
- B** Quick release door: the front door can be easily moved to the opposite side for left-handed or right-handed hinging
- C** Three Ways, Top, Bottom, and Rear Cabling Tunnels
- D** Air ventilation: partially vented frames and two optional AC fans give the cabinet max air flow
- E** Meet IP20 Protection Grade
- F** Enforced Strengthen Glass Front Door with Security Key Lock
- G** Removable Side Panels with Easy Handy Latches
- H** 2.0mm SPCC High-Quality Cold Roll Steel Post; 1.2mm for Enclosure
- I** Degreasing, Acidification, Phosphoric, Static Electricity or Powder Coat Surface Finish



# WM1245B.WM1260B

## DRAWING

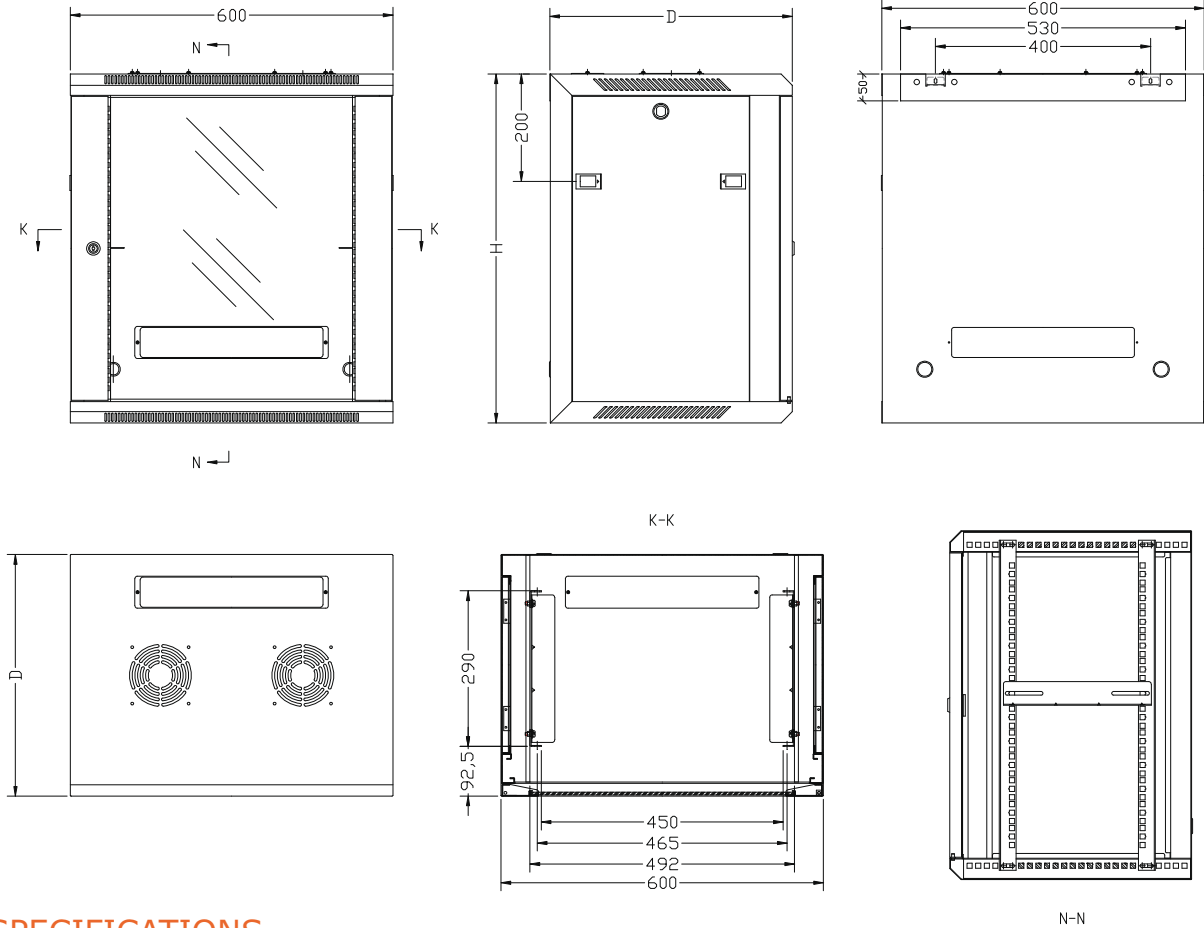

## SPECIFICATIONS

Model Number	WM1245B	WM1260B
RoHS Compliance Version	Yes	Yes
Rack Units	12U	12U
Dimensions [WxHxD]	600 x 635 x 450 mm	600 x 635 x 600 mm
Internal Depth [mm]	420mm	570mm
Security	Front & Rear Locks	Front & Rear Locks
Industry Standard	Accord with ANSI/EIARS-310-D, IEC297, DIN41494, DIN41491, Part7GB/T3047.2-92	Accord with ANSI/EIARS-310-D, IEC297, DIN41494, DIN41491, Part7GB/T3047.2-92
Thickness	2.0mm SPCC High-Quality Cold Roll Steel Post; 1.2mm for Enclosure	
Materials	SPCC High-Quality Cold Roll Steel	
Safety	TUEV	
EMI Noise Filter	CE	

:: Specification and wiring diagram subject to change without notice  
 :: Limited Life Time Warranty  
 :: Last Update: Oct/2007



# WM1545B.WM1560B

15U 450mm/600mm Depth Wallmount Server Cabinet



## INTRODUCTION

Elegant and secured WM1545B/WM1560B wall mount cabinet by iStarUSA. The easy side panel access is convenient to perform routine maintenance, but also can be locked to prevent unauthorized access. Three ways, top, bottom, and rear cabling tunnels enable data and cable routing. WM series incorporate optimal cooling design. The partially vented frames and two optional AC fans that can be put on the top panel give the wall-mount cabinet excellent air ventilation. Heat-treated glass door provides extra strength and able to silkscreen logos, marks, and labels to boost product image.


## FEATURES

- A** Sturdy and Rugged Welded Frame Structure Comes Pre-Assembled
- B** Quick release door: the front door can be easily moved to the opposite side for left-handed or right-handed hinging
- C** Three Ways, Top, Bottom, and Rear Cabling Tunnels
- D** Air ventilation: partially vented frames and two optional AC fans give the cabinet max air flow
- E** Meet IP20 Protection Grade
- F** Enforced Strengthen Glass Front Door with Security Key Lock
- G** Removable Side Panels with Easy Handy Latches
- H** 2.0mm SPCC High-Quality Cold Roll Steel Post; 1.2mm for Enclosure
- I** Degreasing, Acidification, Phosphoric, Static Electricity or Powder Coat Surface Finish



# WM1545B.WM1560B

## DRAWING

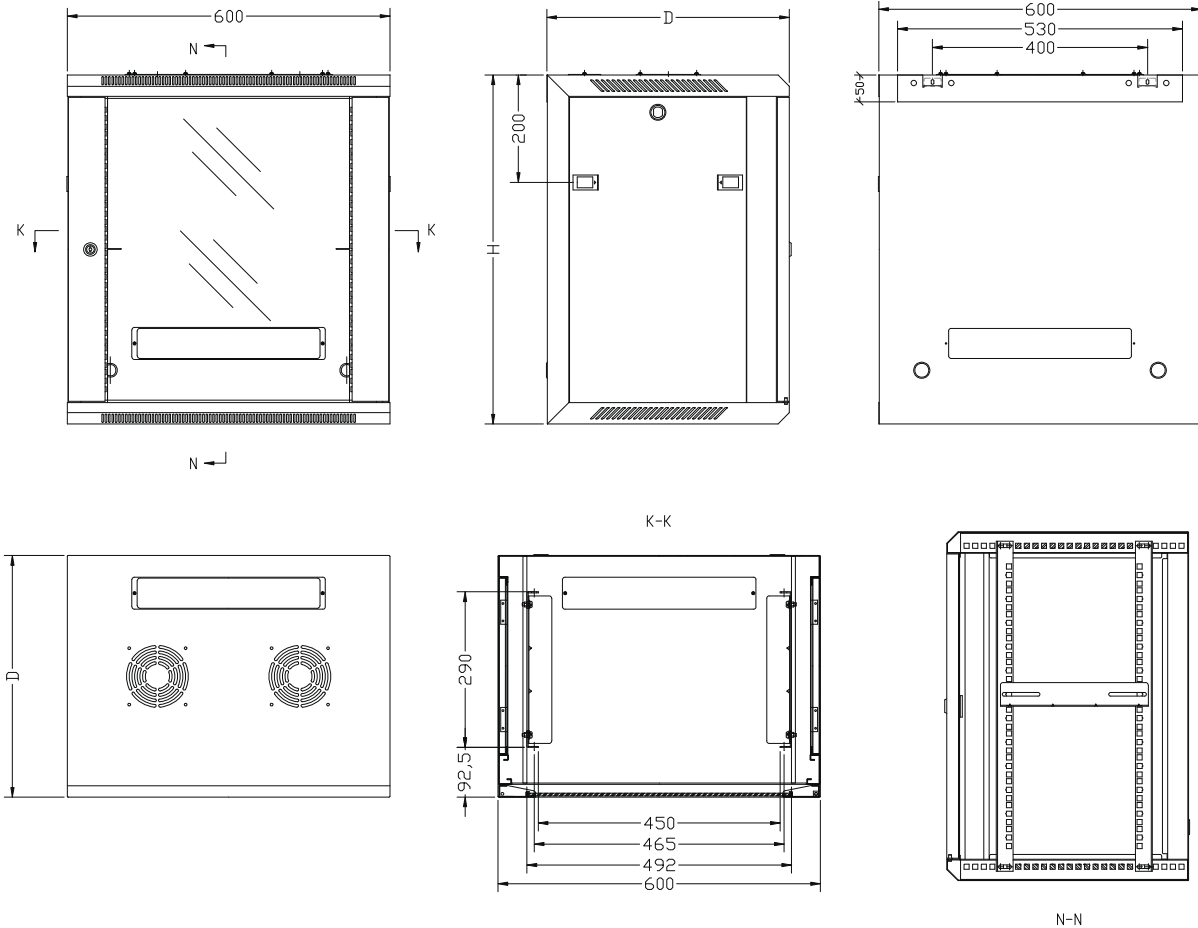

## SPECIFICATIONS

Model Number	WM1545B	WM1560B
RoHS Compliance Version	Yes	Yes
Rack Units	15U	15U
Dimensions [WxHxD]	600 x 769 x 450 mm	600 x 769 x 600 mm
Internal Depth [mm]	420mm	570mm
Security	Front & Rear Locks	Front & Rear Locks
Industry Standard	Accord with ANSI/EIARS-310-D, IEC297, DIN41494, DIN41491, Part7GB/T3047.2-92	Accord with ANSI/EIARS-310-D, IEC297, DIN41494, DIN41491, Part7GB/T3047.2-92
Thickness	2.0mm SPCC High-Quality Cold Roll Steel Post; 1.2mm for Enclosure	
Materials	SPCC High-Quality Cold Roll Steel	
Safety	TUEV	
EMI Noise Filter	CE	

:: Specification and wiring diagram subject to change without notice  
 :: Limited Life Time Warranty  
 :: Last Update: Oct/2007





# WM1845B.WM1860B

## 18U 450mm/600mm Depth Wallmount Server Cabinet



### SPECIFICATIONS

Elegant and secured WM1845B/WM1860B wall mount cabinet by iStarUSA. The easy side panel access is convenient to perform routine maintenance, but also can be locked to prevent unauthorized access. Three ways, top, bottom, and rear cabling tunnels enable data and cable routing. WM series incorporate optimal cooling design. The partially vented frames and two optional AC fans that can be put on the top panel give the wall-mount cabinet excellent air ventilation. Heat-treated glass door provides extra strength and able to silkscreen logos, marks, and labels to boost product image.


### FEATURES

- A** Sturdy and Rugged Welded Frame Structure Comes Pre-Assembled
- B** Quick release door: the front door can be easily moved to the opposite side for left-handed or right-handed hinging
- C** Three Ways, Top, Bottom, and Rear Cabling Tunnels
- D** Air ventilation: partially vented frames and two optional AC fans give the cabinet max air flow
- E** Meet IP20 Protection Grade
- F** Enforced Strengthen Glass Front Door with Security Key Lock
- G** Removable Side Panels with Easy Handy Latches
- H** 2.0mm SPCC High-Quality Cold Roll Steel Post; 1.2mm for Enclosure
- I** Degreasing, Acidification, Phosphoric, Static Electricity or Powder Coat Surface Finish



# WM1845B.WM1860B

## DRAWING

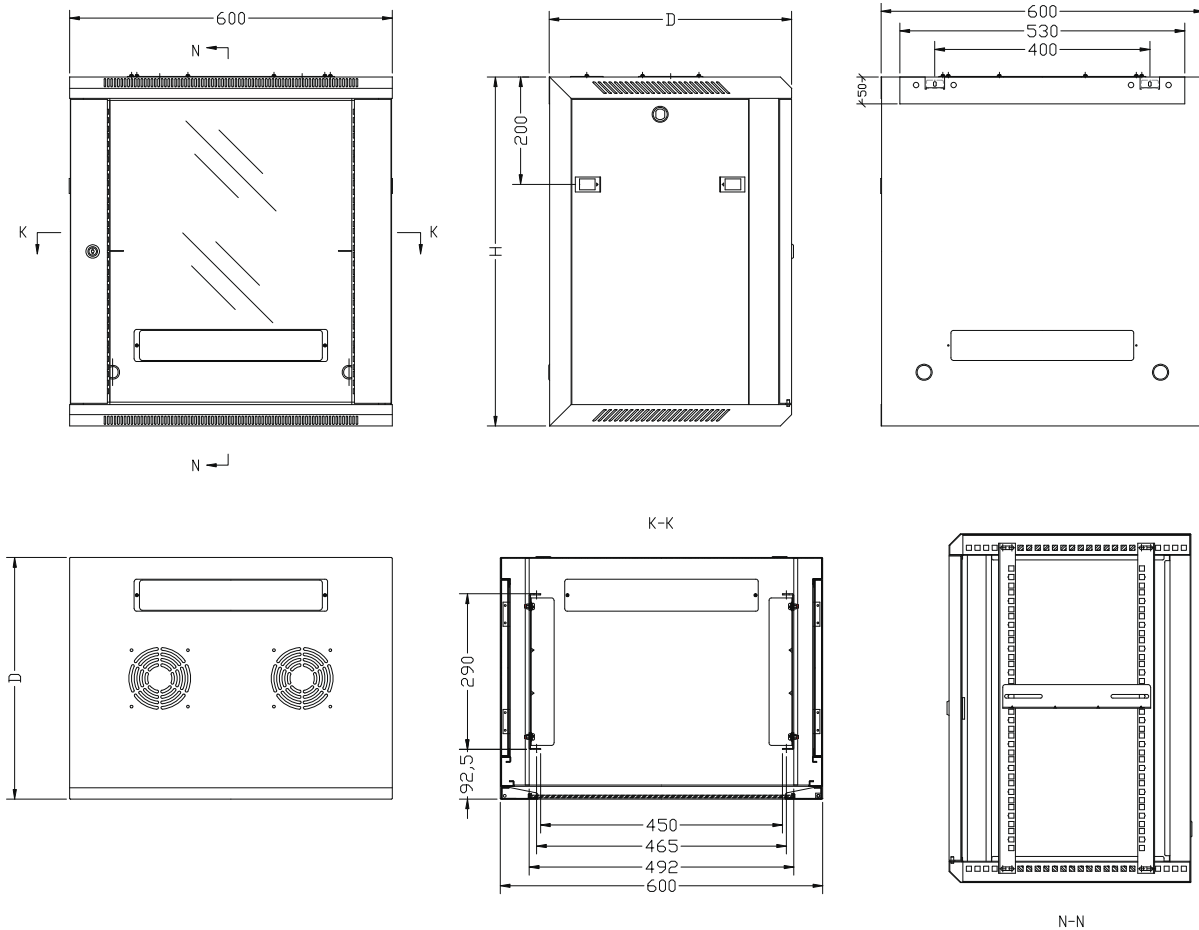

## SPECIFICATIONS

Model Number	WM1845B	WM1860B
RoHS Compliance Version	Yes	Yes
Rack Units	18U	18U
Dimensions [WxHxD]	600 x 901 x 450 mm	600 x 901 x 600 mm
Internal Depth [mm]	420mm	570mm
Security	Front & Rear Locks	Front & Rear Locks
Industry Standard	Accord with ANSI/EIARS-310-D, IEC297, DIN41494, DIN41491, Part7GB/T3047.2-92	Accord with ANSI/EIARS-310-D, IEC297, DIN41494, DIN41491, Part7GB/T3047.2-92
Thickness	2.0mm SPCC High-Quality Cold Roll Steel Post; 1.2mm for Enclosure	
Materials	SPCC High-Quality Cold Roll Steel	
Safety	TUEV	
EMI Noise Filter	CE	

:: Specification and wiring diagram subject to change without notice  
 :: Limited Life Time Warranty  
 :: Last Update: Oct/2007

