



## 2. Hardware Installation (Continued)


- Step 4** Remove the safety support bracket on the removable HDD tray prior to mounting the hard drive. The bracket will no longer be used after the drive is mounted to the tray; it is only used as a support to avoid damages to the tray when transporting.



- Step 5** Mount the hard drive onto the removable tray using the enclosed screws.



- Step 6** Re-insert the removable tray when hard drive is mounted. Please make sure the tray is securely inserted into the appropriate position.



- Step 7** When the hard drives are installed, turn on the unit by powering up the main system. Installation completed. Your operating system should automatically detect the hard drives (as RAID 1 or RAID 0 for IR12TB).

Please proceed to format and partition the drives. The unit will not function correctly without format and partition.



# INTERNAL STORAGE

ISI2TB | IRI2TB



QUICK INSTALLATION GUIDE v1.0


## 1. Package Contents

After opening the outer package, make sure that the following items are included:

- ISI2TB / IRI2TB
- Quick Installation Guide
- Manual CD
- Installation Screws

(If any of the above accessories is missing or the main unit is damaged prior to initial use, please contact Sans Digital at 1.800.980.1988.)

### Front View

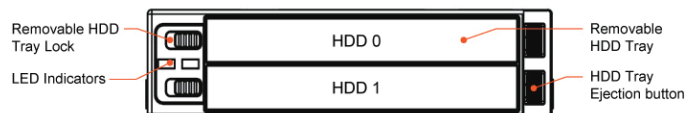


**Note:** When the "HDD lock" is position to the right, the removable HDD tray is locked into place. Do not press the "Eject Button" at this time as this may cause damages to the removable tray and HDD lock.



### Description of LED Indicators

ISI2TB		IR12TB	
Corresponding LED to HDD Position		HDD Access	Flashes purple color
LED A	HDD 1	No HDD in Position	Alternating blue and red colors
LED B	HDD 0	HDD Failure	Alternating blue and red colors
Status Indication Definition		Rebuilding (RAID 1)	Illuminates purple color (source) Alternating purple and red colors (target)
Power On	Illuminates blue color	HDD Idling	Illuminates blue color
Over high temperature	Illuminates purple color	HDD Verifying	Illuminates blue color (source) Illuminates purple color (target)
Fan Fail	Illuminates purple color		
HDD Access	Flashes blue color		


### Rear View

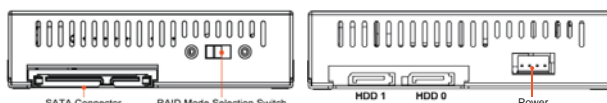

## 2. Hardware Installation

Please follow the following procedures to complete the hardware installation:


- Step 1** Open the outer packaging and retrieve the main unit.



- Step 2** For IR12TB only: ISI2TB is defaulted at RAID 1 mode. Please switch to "RAID 0" position if desired.



- Step 3** Install the unit into the housing and connect the relevant cables to the relevant connectors. Please refer to the accessory bag and use the enclosed screws to mount the unit into the system housing. Connect the data and power cable to the back of the unit.

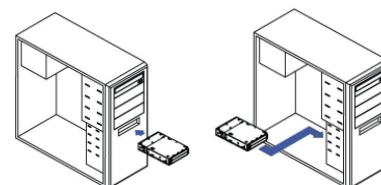

### Mounting Positions

