

Installation Instructions



TELEHOOK

32"-60" WALL FIXED

Important Notes



- The Telehook 32-60 Wall Fixed supports LCD and Plasma Flat Panel Displays from 32" (81cm) to 60" (152cm) and supports a maximum load of 91kgs (200lbs).
- This product suits displays with mounting hole patterns from 180mm to 740mm wide (7"-29") by 93mm to 500mm high (3^{11/16}"-20").
- The manufacturer does not accept responsibility for incorrect installation.

Component Checklist



TOOLS REQUIRED:

- Power Drill
- 12mm or 8mm Drill Bit
- Phillips Head Screw Driver
- Spirit Level
- 17mm (1^{1/16}") Socket Wrench or Shifter



Bits Bag



Mounting Screws




M8x15mm / M8x35mm / M8x45mm (x4 each)
 M6x15mm / M6x35mm / M6x45mm (x4 each)
 M5x15mm / M5x35mm / M5x45mm (x4 each)
 M4x15mm / M4x35mm / M4x45mm (x4 each)

A Mounting the Wall Plate

Masonry Wall

Note: Ensure the Wall Plate is mounted with the folded tabs pointing upwards.

TIP: Use a spirit level to ensure the wall plate is horizontal

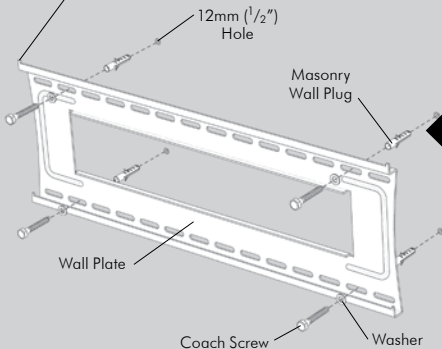


OR


Timber Stud Wall

Note: Ensure the Wall Plate is mounted with the folded tabs pointing upwards.

TIP: Use a spirit level to ensure the wall plate is horizontal

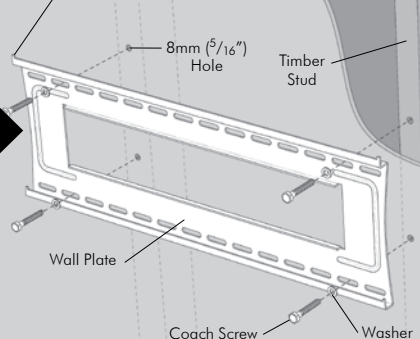


B Mounting the Display Brackets

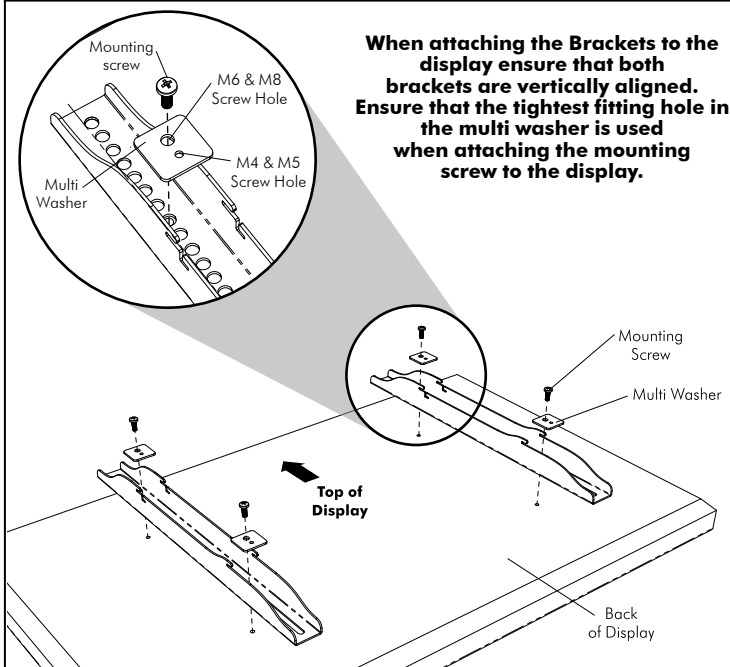

Recessed Mounting Holes


If the mounting holes are recessed into the back of the display, use the supplied Recessed Hole Bushes to pack the recessed hole. If the brackets require further clearance from the display, attach the Spacer Bushes. Ensure that the brackets are securely fixed to the display.



C Attaching the display to the wall plate

Note: This procedure will require two persons

With the Brackets attached to the display, lift the display and hook the brackets onto the Wall Plate as shown.




Note: For demonstration purposes, the wall has been omitted from the above images.


D Security Option

Note: For demonstration purposes, the display has been omitted from the images below.

D.1.

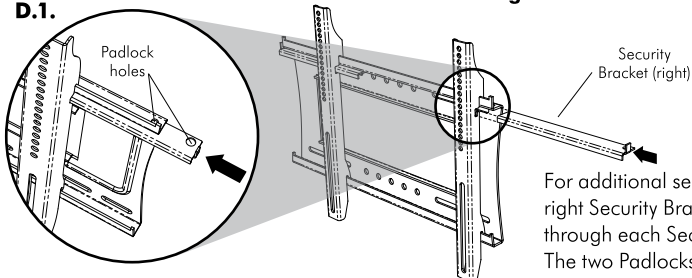

D.2.



For additional security, it is suggested that the left and right Security Brackets be inserted and a Padlock attached through each Security Bracket and the Wall Plate as shown. The two Padlocks (not supplied) should have a shackle diameter no larger than 5mm ($\frac{3}{16}$ ").

atdec