

Overview

HP ProDisplay P222va 21.5-inch Monitor

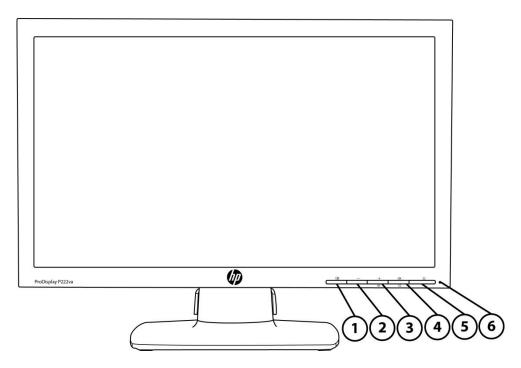

- 1. Menu button
- **2.** Minus ("-")
- 3. Plus ("+") /Input Control


- 4. OK/Auto,
- 5. Power button
- 6. Power indicator LED

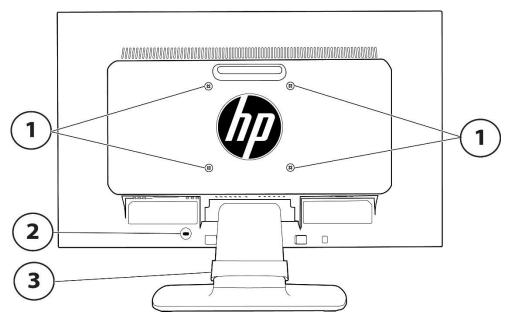


- 1. VESA mounting holes
- **2.** Security lock slot

3. Cable routing clip (stand not included on head only model)

Overview

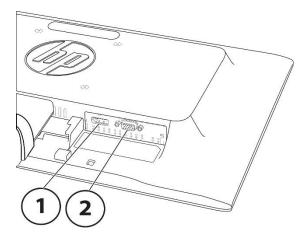

- 1. DisplayPort v 1.2
- 2. VGA

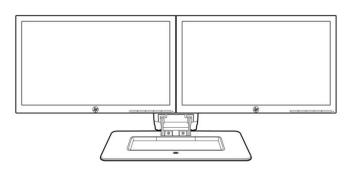

Your ideal office configuration begins with two HP ProDisplay P222va monitors combined with an HP Adjustable Dual Display Stand (AW664AA) for a small footprint, high productivity work solution.*

HP ProDisplay P222va and HP Adjustable Dual Display Stand dual monitor configuration shown. (Note: monitors and stands sold separately)

*NOTE: Multi-monitor support is dependent on your system. Check your user guide or technical specifications for compatibility. Optional accessories may be required.

Overview

Put your HP Pro PC content front and center on an ample 21.5-inch diagonal display with the HP ProDisplay P222va Monitor.

Key features:

- Share your content in crisp, clear color on the 21.5-inch diagonal screen with 1920 x 1080 resolution, and 3000:1 contrast ratio.¹
- Experience stunning FHD picture quality, ultra-fast graphics refresh, and vivid colors with DisplayPort.
- Attach your HP PC or select HP Thin Client directly behind the display.²
- Reduce power consumption and help lower your costs with an energy-efficient design.
- Free up valuable desk space with mounting options³ enabled by the 100-mm VESA pattern, or select the head-only model³ if you don't need a stand.
- Customize a total solution with options³ designed for your display.
- Design the screen for how you work with HP Display Assistant software.
- Get award-winning service and support by phone or online.
- 1 All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.
- 2 Requires HP Quick Release, sold separately. See product QuickSpecs for exact PC and thin client compatibility.
- 3 Each accessory sold separately. Mounting hardware sold separately. Head only model sold separately and availability varies by region.



Technical Specifications

Models: K7X30AA - HP ProDisplay P222va 21.5-inch Monitor

L5U12AA - HP ProDisplay P222va 21.5-inch Monitor Head Only

Panel	Tvpe	21.5-inch VA w/LED backligh
railei	IVDE	21.5-IIICII VA W/LED DACKIIUI

Viewable Image Area

(diagonal)

54,61 cm (21.5-inch) widescreen; diagonally measured

Panel Active Area

(W × H)

47,6 x 26,7 cm (18.74 × 10.51 in)

Resolution 1920 x 1080 @ 60 Hz

Aspect Ratio 16:9

Viewing Angle Up to 178° horizontal/178° vertical typical

Brightness 250 cd/m² **Contrast Ratio (Typical)** 3000:1 Static

Response Time (Typical):*

8 ms gray to gray

Pixel Pitch .248 mm
Pixels Per Inch (PPI) 102.4 DPI

Backlight Lamp Life (to half brightness)

30,000 hours minimum

Color Support Up to 16.7 million colors with the use of FRC technology

Color Gamut (Typical) 72%

^{*} Performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

User Controls	Buttons or Switches	Menu. Minus ("-"). Plus ("+") /Input Control. OK/Auto. Power

Languages 10 (English, Spanish, German, French, Italian, Netherlands, Portuguese,

Japanese, T-Chinese and S-Chinese)

On Screen Display Brightnes (OSD) User Controls Power Co

Brightness, Contrast, Input Control, Color Control, Image Control, Power Control, OSD control, Management, Language, Information, Exit

User Programmable

Modes

Yes, 10

Audio Controls N/A

Signal Interface/ Performance **Horizontal Frequency**

24-80 kHz

Vertical Frequency

50-60 Hz

Native Resolution

1920 x 1080 @ 60 Hz

Preset Graphic Modes (non-interlaced)

640 x 480 @ 60Hz

800 x 600 @ 60Hz

1024 x 768 @ 60Hz

1280 x 720 @ 60Hz

1280 x 800 @ 60Hz



Technical Specifications

1280 x 1024 @ 60Hz 1440 x 900 @ 60Hz 1600 x 900 @ 60Hz 1680 x 1050 @ 60Hz 1920 x1080 @ 60Hz

Anti-Glare Yes

Video/Other Inputs **Plug and Play** Yes

> **Input Connectors** (1) DisplayPort 1.2, (1) VGA

> > **HDCP** support on DisplayPort

USB N/A

Video Cables Included (1) DisplayPort **1,8 m** (5.9 ft)

(1) VGA 1,8 m (5.9 ft)

Audio N/A

Multimedia **Speakers** N/A

Power Power Supply Internal

> **Input Power** 100 - 240 VAC 50/60 Hz

Maximum Power 28 W **Typical Power** 24 W **Sleep Power** 0.5 W

Power Cable Length 1,9 m (6.2 ft)

Mechanical **Dimensions**

 $(W \times D \times H)$

Unpacked w/stand (highest setting) Unpacked w/o stand (head only)

51,8 x 18,66 x 37,92 cm (20.39 x 7.35 x 14.93 in) 51,8 x 4,75 x 31,52 cm (20.39 x 1.87 x 12.41 in)

58,9 x 13,2 x 40,9 cm Packaged (23.19 x 5.20 x 16.10 in)

Weight **Head Only 2,94 kg** (6.48 lb)

> **Unpacked with stand 3,61 kg** (7.95 lb)

> **Packaged** 4,9 kg (10.79 lb)

Ergonomic Features - Not available on head only model

Detachable Stand

Yes, ships detached*

*Not included with head only model

Height Adjustment N/A

Tilt Range -5° to + 22° vertical

Swivel N/A **Pivot** N/A

Environmental Temperature -

Operating

Temperature - Non-

operating

-20° to 60° C (-4° to 140° F)

5° to 35° C (41° to 95° F)



Technical Specifications

Options

Humidity - Operating

20% to 80% non-condensing

Humidity - Non-

5% to 95%, 38.7° C max wet-bulb

operating

Altitude - Operating

White LED Backlights

0 to 5,000 m (0 to 16,404 ft)

Altitude - Non-

0 to 12,192 m (0 to 40,000 ft)

operating

CCFL Panel

Yes

No

Arsenic-Free Display

Yes

Glass Low Halogen¹

Yes (except cables)

Mercury-Free Display

Backlighting

HP LCD Speaker Bar—

Part number NQ576AA

Powered directly by the connected PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and dual external headphone jacks. Sold separately. For more information, refer to the product's QuickSpecs.

HP Adjustable Dual Display Stand—Part Number AW664AA

Premium space-saving dual screen solution provides access to more monitor real estate and makes it possible to manage multiple applications simultaneously. Weight adjustable for dual monitors from

17-24". Rotate displays into portrait/landscape positions.

HP Integrated Work Center for Desktop Mini and Thin Client—Part Number G1V61AA

Make the most of small work spaces with an HP IWC Desktop Mini/Thin Client that lets you create a compact desktop solution by combining a compatible display up to 24 diagonal inches with your choice of compatible platform to give you convenient front access to all of its inputs.

HP DisplayPort Cable Kit —Part number VN567AA

Connects a DisplayPort connector on an HP Business Desktop

computer to a DisplayPort connector on a monitor

HP LCD Monitor Ouick Release — Part number

EM870AA4

An easy-to-use, VESA-compliant, LCD monitor mounting solution that allows you to quickly and securely attach an LCD monitor to a variety of stands, brackets, arms or wall mounts. For more information, refer to this product's QuickSpecs document.

HP Business PC Security Lock Kit — Part number

PV606AA

Attaches to the rear of the PC with a six-foot steel cable that can be used to secure a PC or peripherals such as mice, keyboards, monitors or USB security devices to protect them against unauthorized removal by physically connecting the system to an anchor point.

What's in the box?

Monitor and Accessories **Documentation** HP ProDisplay P222va 21.5-inch Monitor, AC power cord (1.9m) 6.2 ft,

DisplayPort cable (1.8m) VGA cable (1.8m) 5.9 ft

CD (includes user guide, warranty, drivers)

Software **HP Display Assistant**

Other User Guide Languages English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish,

Swedish and Turkish.



Technical Specifications

Warranty Languages English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish,

French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish,

Swedish and Turkish.

Color Black

VESA Mounting 100 mm VESA mount

Security Lock-Ready Yes
Country of Origin China

Certification and Compliance

TCO Certified, CEL Grade 1, Microsoft WHQL Certification (Windows 8.1 and Windows 7), ENERGY STAR® Qualified, EPEAT® Gold², CE, CB, KC, KCC, NOM, PSB, ICE, TUV-S, CCC, CEL, CECP, SEPA, EPA, ISC,

VCCI, FCC, Taiwan: BMSI

Compatibility Compatible with platforms using the VESA standard video modes. Recommended for use with HP

products.

Service and Warranty Protected by HP, including a 3 year standard limited warranty. Optional HP Care Pack Services are

extended service contracts that extend your protection beyond the standard warranties.3



Environmental Data

Eco-Label Certifications & declarations Energy Consumption (in accordance with US ENERGY STAR® test method) Normal Operation Sleep Off	may be labeled IT ECO US ENI TCO 6.	with one or modeclaration ERGY STAR® 0 ® <gold> registration status in 5,60Hz 8 W</gold>	tered in the United States. So your country 230VAC, 50Hz 19.0 W 0.3 W 0.2 W		t for 60Hz W
Heat Dissipation*	115VAC	, 60Hz	230VAC, 50Hz	100VAC,	60Hz
Normal Operation	66 B1		65 BTU/hr	66 BTU	
Sleep Off	1 BT	•	1 BTU/hr 1 BTU/hr	1 BTU 1 BTU	
Additional Information	*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour. • This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC. • This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC. • This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986). • This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see www.epeat.net • Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043. • This product contains 16.8 % post-consumer recycled plastic (by wt.) • This product is 97.9 % recycle-able when properly disposed of at end of life.				
Packaging Materials	External:				646.4 g
	Internal:	PLASTIC/EPE	E-Expanded Polyethylene		21.7 g
		PLASTIC/EPS	(Expanded Polystyrene)		207.6 g
		PLASTIC/Oth	er plastics unknown		3.8 g
RoHS Compliance	regulations, inc Directive. HP's RoHS Directive eliminated (virt RoHS Directive,	cluding the Euro goal is to excee on a worldwido cually = to level o except where	d to compliance with all applopean Union Restriction of Hed compliance obligations by basis. By July 1, 2006, RoHes below legal limits) for all Hes widely recognized that to exemption under the EU Ro	azardous Substances (R meeting the requireme S substances will be virti IP electronic products su here is no technically fea	oHS) nts of the ually ıbject to the



Environmental Data

Material Usage	This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/qlobalcitizenship/environment/pdf/qse.pdf): - Asbestos - Certain Azo Colorants - Certain Brominated Flame Retardants – may not be used as flame retardants in plastics - Cadmium - Chlorinated Hydrocarbons - Chlorinated Paraffins - Formaldehyde - Halogenated Diphenyl Methanes - Lead carbonates and sulfates - Lead and Lead compounds - Mercuric Oxide Batteries - Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user Ozone Depleting Substances - Polybrominated Biphenyl Ethers (PRRES)
	 Polybrominated Biphenyl Ethers (PBBEs) Polybrominated Biphenyl Oxides (PBBOs) Polychlorinated Biphenyl (PCB) Polychlorinated Terphenyls (PCT) Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications. Radioactive Substances Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
Packaging	 HP follows these guidelines to decrease the environmental impact of product packaging: Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials. Eliminate the use of ozone-depleting substances (ODS) in packaging materials. Design packaging materials for ease of disassembly. Maximize the use of post-consumer recycled content materials in packaging materials. Use readily recyclable packaging materials such as paper and corrugated materials. Reduce size and weight of packages to improve transportation fuel efficiency. Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.
End-of-life Management and Recycling	Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/qo/reuse-recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/qo/recyclers . These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.



Environmental Data

Hewlett-Packard Corporate Environmental Information	For more information about HP's commitment to the environment: Global Citizenship Report



QuickSpecs HP ProDist

HP ProDisplay P222va 21.5-inch Monitor HP ProDisplay P222va 21.5-inch Monitor Head Only

Environmental Data

© Copyright 2015 Hewlett-Packard Development Company, L.P.

ENERGY STAR is a registered mark owned by the U.S. government. All specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

- External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.
- 2. EPEAT® Gold where HP registers commercial display products. See www.epeat.net for registration status in your country.
- 3. Service levels and response times for HP Care Pack Services may vary depending on your geographic location. Service starts from date of hardware purchase. Restrictions and limitations apply. See www.hp.com/go/cpc for details.
- 4. The HP Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) for all devices mounted. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads.



HP ProDisplay P222va 21.5-inch Monitor HP ProDisplay P222va 21.5-inch Monitor Head Only

QuickSpecs

Change Log

Change Log		

