




Tripp Lite
1111 West 35th Street
Chicago, IL 60609 USA
Telephone: +(773) 869 1234
E-mail: saleshelp@tripplite.com

Model #: PDUV15

Single-Phase Basic PDU, 15A 120V, 0U Vertical Rackmount, NEMA 5-15R outlets, NEMA 5-15P input plug

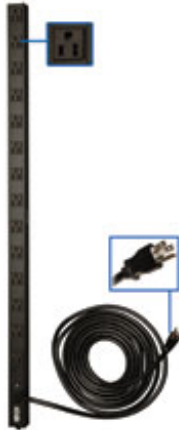

Highlights

- 15A 120V Basic Power Distribution Unit
- 0U Vertical Rackmount format with 36 in / .9m height
- 14 NEMA 5-15R outlets
- NEMA 5-15P input plug
- 15 ft. / 4.6m attached line cord
- Toolless mounting buttons and bolt-down brackets included

Description

Tripp Lite PDUV15 offers 15A 120V power distribution in 36 in. / .9m vertical rackmount format. Includes NEMA 5-15P input plug, attached 15 ft. / 4.6m line cord and 14 NEMA 5-15R outlets. 0U vertical rackmount installation with included mounting brackets. Toolless button-mount installation supported in compatible racks.

Applications

- Ideal for network power distribution in datacenters, computer rooms and network closets

Package Includes

- PDUV15 Basic Vertical PDU
- Mounting hardware
- Owner's manual with warranty information

Features

- PDUV15 offers reliable 15A 120V power distribution in 36 inch / .9m 0U vertical rackmount format
- 14 NEMA 5-15R output receptacles
- NEMA 5-15P input plug
- 15 ft. / 4.6m attached line cord
- 15A resettable circuit breaker
- Switch-free design prevents accidental shutoff
- Toolless mounting buttons enable simple installation in Tripp Lite and other button-mount compatible equipment racks
- Rear facing installation buttons can be relocated to the left or right surface of the PDU for rear, center or forward-facing outlet orientation in compatible racks
- Included nut and bolt mounting brackets supports installation in non button-mount compatible racks
- Mounting brackets also enable secure wallmount installation in a variety of raceway or workbench applications

Specifications

OVERVIEW

Model Type	Basic
PDU Type	Basic
OUTPUT	
Frequency compatibility	50 / 60 Hz
Output VA	1800
Output nominal voltage	120V
Overload protection	15A
Outlet quantity / type	14 NEMA 5-15R
INPUT	
PDU Input Voltage	100; 120; 127
Recommended Electrical Service	120V
Maximum Input Amps (A)	15
Input connection type	NEMA 5-15P
Plug Type	NEMA 5-15P (15A 120V)
PDU Plug Type	NEMA 5-15P
Input cord length (ft.)	15
Voltage compatibility (VAC)	120
Phase	Single-Phase
PHYSICAL	
Shipping weight (lbs)	3.8
Unit Dimensions (HWD/in)	36 x 1.25 x 1.75
Shipping Dimensions (HWD/in)	40 x 2.8 x 3
Unit weight (lbs)	3.3
Material of construction	Aluminum
Style	Vertical Rackmount, Wallmount, Raceway, Workbench
Form factors supported	Vertical (0U) mounting in rack enclosures, horizontal mount in raceways and a variety of other applications
PDU Form Factor	Vertical (0U)
SPECIAL FEATURES	
Appearance	Black housing
CERTIFICATIONS	
Certifications	Tested to UL60950-1 (USA) and CAN/CSA C22.2 No. 60950-1-03 (Canada), RoHS Compliant
WARRANTY	
Product Warranty Period (U.S., Canada & Puerto Rico)	Lifetime limited warranty

Related Items

Optional Products

Product Type	Related Model	Description	Qty.
Power Cables	P002-002	2-ft. Power Cord (IEC-320-C14 to NEMA 5-15R)	-
Power Cables	P007-002	2-ft. Heavy-Duty 14AWG Power cord (IEC-320-C13 to NEMA 5-15P)	-
Power Cables	P007-006	6-ft. Heavy-Duty 14AWG Power cord (IEC-320-C13 to NEMA 5-15P)	-
Power Cables	P007-010	10-ft. Heavy-Duty 14AWG Power cord (IEC-320-C13 to NEMA 5-15P)	-
Power Cables	P010-012	12-ft. 18AWG Power cord (NEMA 5-15P to IEC-320-C13)	-
Power Cables	P012-006	6-ft. Notebook Power cord (NEMA 1-15P to IEC-320-C7)	-
Power Cables	P022-001	1-ft. 18AWG Power Extension cord (NEMA 5-15R to NEMA 5-15P)	-
Power Cables	P023-001	1-ft. 14AWG Power Adapter cord (NEMA L5-15R to NEMA 5-15P)	-
Power Cables	P034-010	10-ft. 14AWG Heavy Duty Power cord (IEC-320-C19 to NEMA 5-15P)	-

More information, including related products, owner's manuals, and additional technical specifications, can be found online at www.tripplite.com/en/products/model.cfm?txtModelID=3880.

Copyright © 2011 Tripp Lite. All rights reserved. All trademarks are the sole property of their respective owners. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Photos may differ slightly from final products.