


## 3.84kW Single-Phase Metered PDU, 200/220/230/240V Outlets (32-C13, 6-C19), IEC309 16A Blue 16A, 0U Vertical

MODEL NUMBER: **PDUMV16HV**

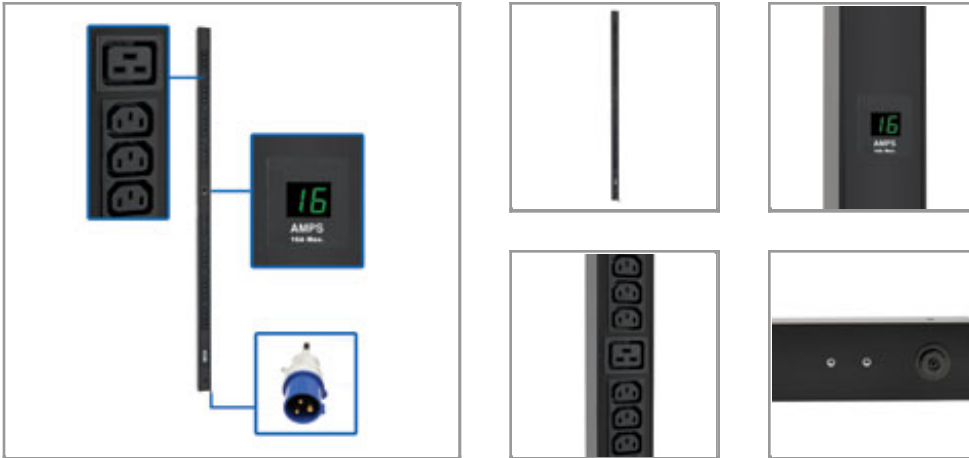

### Description

Tripp Lite single phase Metered PDU / Power Distribution Units offer real-time local reporting of load level in amps via built-in digital display. Enables visual monitoring of PDU load levels to prevent overloads as additional equipment is added. Offers reliable rackmount multi-outlet power distribution from any protected UPS, generator or mains input power source. High quality design includes rugged all-metal housing and secure rackmount installation with included mounting accessories.

### Features

- 3.84kW 16A single phase 200/220/230/240V Metered Power Distribution Unit / PDU
- Two-digit lighted meter reports combined total output current in amps
- 10ft / 3m input cable with Blue IEC309 16A input plug
- 0U 63.75in / 162cm vertical rackmount format installs vertically, using no rack spaces
- 38 total outlets (6 C19, 32 C13)
- Plug-lock cord retention sleeves keep C20 and C14 equipment plugs from accidental disconnection
- Toolless installation supported in button-mount compatible equipment racks
- Bolt-down installation brackets support installation in other racks and additional surfaces

### Highlights

- Metered single phase 16A 200/220/230/240V 0U 63.75in / 162cm vertical rackmount PDU
- Two-digit meter reports output current in amps
- 10ft / 3m input cable with IEC309 Blue 16A input connection
- 38 output receptacles (6 C19, 32 C13), included plug-lock cord retention sleeves
- Toolless button mount and bolt-down bracket installation hardware included

### Applications

- Ideal means of powering networking equipment in datacenters, computer rooms and network closets

### Package Includes

- PDUMV16HV 63.75 inch metered PDU with owner's manual
- Plug-lock cord retention sleeves (32 C14 and 6 C20)
- Set of mounting brackets and installation hardware

## Specifications

SELECTOR	
Selector Type	PDU'S
General Info	



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
www.tripplite.com

Product Group	PDUS
<b>SELECTOR</b>	
Digital Load Meter	Yes
Redundant Power Cords	No
SNMP Compatible	No
<b>General Info</b>	
TAA Compliant	No
<b>OVERVIEW</b>	
Style	Vertical Rackmount, Wallmount, Raceway, Workbench
PDU Type	Metered
<b>OUTPUT</b>	
Output Capacity Details	3.2kW (200V), 3.52kW (220V), 3.68kW (230V), 3.84kW (240V input); 16A maximum
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(32) C13; (6) C19
Output Nominal Voltage	200/220/230/240V nominal, single phase
Outlet Quantity / Type	38 total (6 C19, 32 C13)
Number of Outlets	38
Outlet Type	IEC-C13, IEC-C19
<b>INPUT</b>	
PDU Input Voltage	200; 220; 230; 240
Maximum Input Amps	16
PDU Plug Type	IEC-309 16A BLUE (2P+E)
Input Cord Length (ft.)	10
Input Cord Length (m)	3.05
Input Phase	Single-Phase
<b>LEDS ALARMS &amp; SWITCHES</b>	
Switches	n/a
Front Panel LEDs	Includes built-in 2-character LED meter to display whole PDU power consumption
<b>PHYSICAL</b>	
Shipping Dimensions (hwd / in.)	64.9 x 3 x 5



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
[www.tripplite.com](http://www.tripplite.com)

Shipping Dimensions (hwd / cm)	164.8 x 7.6 x 12.7
Shipping Weight (lbs.)	7.9
Shipping Weight (kg)	3.6
Unit Dimensions (hwd / in.)	63.75 x 2.25 x 3.75
Unit Dimensions (hwd / cm)	162 x 5.7 x 9.5
Unit Weight (lbs.)	5.3
Unit Weight (kg)	2.4
Material of Construction	Aluminum
Form Factors Supported	0u vertical installation in equipment racks, plus under-counter and wallmount
PDU Form Factor	Vertical (0U)
<b>ENVIRONMENTAL</b>	
Relative Humidity	0-95% non-condensing
<b>SPECIAL FEATURES</b>	
KVM Demo LP Ad Flag	0
US & Canada Only Flag	0
Console Server Demo LP Ad Flag	0
Charging Station Video Ad Flag	0
16kVA Hotswap Video Ad Flag	0
3kVA Hotswap Video Ad Flag	0
<b>CERTIFICATIONS</b>	
Certifications	Tested to CE (IEC 60950-1), GOST (Russia), Class A (Emissions),
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2015 Tripp Lite. All rights reserved. All trademarks are the sole property of their respective owners. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Photos may differ slightly from final products.