

Overview

HP ProLiant ML350 Generation9 (Gen9)

The ML350 Gen9 is the 2P premium server which delivers a class-leading combination of performance, availability, expandability, manageability, reliability and serviceability making it the choice for remote offices, growing businesses and data centers.

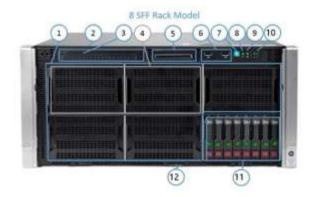

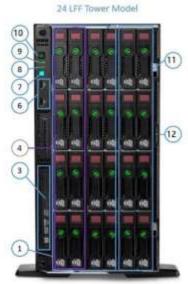


Front view details for Rack (SFF) and Tower (LFF)

- 1. Optional HDD cage Drive Cage Bays (Rack shown with blanks. Tower shown with 16 LFF Optional drives)
- 2. Quick removal access panel (shown on Rack)
- 3. Slim Height Drive Bay for Optional Slim Height SATA DVD-ROM or DVD RW Optical Drive (shown on Tower)
 - Media Drive Cage Bays (Rack supports two half height
- or one full height device; Tower supports one half height device)
- 5. Systems Insight Display Bay for Optional SID (Rack models only)
- 6. Two (2) USB 2.0 connectors
- 7. Unit ID LED button
- 8. Health LED
- 9. NIC Activity LED
- 10. Power On /Standby button & system power LED button
- 11. Eight (8) SFF (Rack)/LFF (Tower) SAS/SATA HDD cage
- 12. Serial label pull tab



Overview

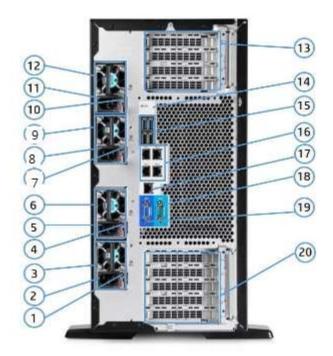


Rear View (Tower Model)

- 1. **Power supply Power LED**
- **Power supply Power connection** 2.
- HP Flexible Slot 4 Power Supply (Optional 500w Power 3. Supply shown)
- 4. **Power supply Power LED**
- Power supply Power connection 5.
- HP Flexible Slot 3 Power Supply (Optional 500w Power 6. Supply shown)
- 7. **Power supply Power LED**
- 8. **Power supply Power connection**
- HP Flexible Slot 2 Power Supply (Optional 500w Power 9. Supply shown)
- 10. Power supply Power LED
- 11. Power supply Power connection
- HP Flexible Slot 1 Power Supply (Standard Entry Model -12. 500w Power Supply shown)
- PCI Slots (Slots 1-4) Slot 1 and 3 can support Optional 13. GPU
- 14. Unit ID LED
- USB 3.0 Connectors (2) top & USB 2.0 Connectors (2) 15.
- 16. Embedded 4 x 1GbE Network Adapter
- 17. **Dedicated iLO Connector**
- **Serial Connector** 18.
- 19. Video Connector
- PCI Slots (Slots 5-9) (requires Optional second 20. processor)-Slot 6 and 8 can support Optional GPU



Overview

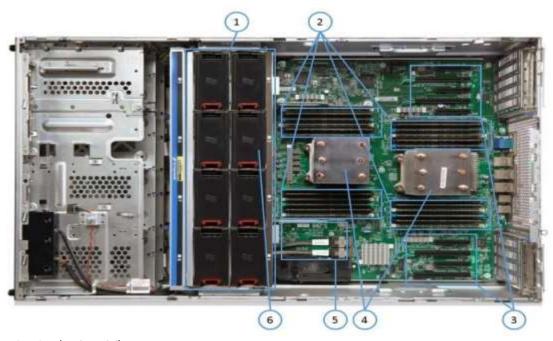

Interior View (Rack Model)

- 1. System fans: Three (3) fans are standard Optional Five (5) systems fans are shown.
- 2. Twenty four DIMM slots: DDR4 Registered (RDIMM) or Load Reduced Registered (LRDIMM) memory
- 3. Nine (9) PCIe expansion slots (8 PCIe Gen3 and 1 PCIe Gen2)
- 4. Two (2) processors and heatsinks (Second Processor is Optional)
- 5. Optional HP Flexible Smart Array or Smart HBA (not shown here)
- 6. Optional HP Smart Storage Battery is under the system fans





NOTE: For more information regarding Intel Xeon processors, please see the following URL: http://www.intel.com/xeon.

Intel® Xeon® processor E5-2600 v3 product family is designed to deliver the best combination of performance, built-in capabilities, and costeffectiveness. One (or two) of the following Intel® Xeon® E5-2600 v3 processors based on the model.

Processor One of the following depending on Model

Model	CPU frequency	Cores	L3 Cache	Power	QPI	DDR4 Hz
E5-2699v3	2.3GHz	18	45MB	145W	9.6GT/s	2133
E5-2698v3	2.3GHz	16	40MB	135W	9.6GT/s	2133
E5-2697v3	2.6GHz	14	35MB	145W	9.6GT/s	2133
E5-2695v3	2.3GHz	14	35MB	120W	9.6GT/s	2133
E5-2690v3	2.6GHz	12	30MB	135W	9.6GT/s	2133
E5-2683v3	2.0GHz	14	35MB	120W	9.6GT/s	2133
E5-2680v3	2.5GHz	12	30MB	120W	9.6GT/s	2133
E5-2670v3	2.3GHz	12	30MB	120W	9.6GT/s	2133
E5-2667v3	3.2GHz	8	20MB	135W	9.6GT/s	2133
E5-2660v3	2.6GHz	10	25MB	105W	9.6GT/s	2133
E5-2650v3	2.3GHz	10	25MB	105W	9.6GT/s	2133
E5-2650Lv3	1.8GHz	12	30MB	65W	9.6GT/s	2133
E5-2643v3	3.4GHz	6	20MB	135W	9.6GT/s	2133
E5-2640v3	2.6GHz	8	20MB	90W	8.0GT/s	1866
E5-2630v3	2.4Ghz	8	20MB	85W	8.0GT/s	1866
E5-2630Lv3	1.8GHz	8	20MB	55W	8.0GT/s	1866
E5-2620v3	2.4GHz	6	15MB	85W	8.0GT/s	1866
E5-2609v3	1.9GHz	6	15MB	85W	6.4GT/s	1600
E5-2603v3	1.6GHz	6	15MB	85W	6.4GT/s	1600

NOTE: E5-2623 v3 will be available in Early 2015.

Chipset Intel® C610 Series Chipset

Intel® E5-2600v3 Processor Family

NOTE: For more information regarding Intel® chipsets, please see the following URL:

http://www.intel.com/products/server/chipsets/.

On System

HP iLO (Firmware HP iLO4 2.0) 4GB NAND

Management Chipset NOTE: 1GB USB user space configurable via UEFI and accessible via iLO. Read and learn more in the iLO

QuickSpecs.

Memory Type:

HP SmartMemory

DDR4 Registered (RDIMM) or Load Reduced (LRDIMM)

(12 DIMM slots per processor, 4 channels per processor, 3 DIMMs per **DIMM Slots Available** 24

channel)

Maximum Capacity

768GB (24 x 16GB RDIMM) (LRDIMM)

Maximum Capacity (RDIMM) 384GB (24 x 32GB LRDIMM)

Memory Protection Advanced ECC Advanced ECC uses single device data correction to detect and correct single and all

multibit error that occurs within a single DRAM chip.

Online spare Memory online spare mode detects a rank that is degrading and switches operation

to the spare rank.

Expansion Slots





Expansion Slots #	Technology	Bus Width	Connector Width	Bus Number	Form Factor	Notes
9	PCle 3.0	x4	x8		Full Length/Full Height	For processor 2
8	PCle 3.0	x16	x16		Full Length/Full Height	For processor 2
7	PCle 3.0	x4	x8		Full Length/Full Height	For processor 2
6	PCle 3.0	x16	x16		Full Length/Full Height	For processor 2
5	PCle 2.0	x4	x8		Half Length/Full Height	For processor 2
4	PCle 3.0	x4	x8	0	Full Length/Full Height	For processor 1
3	PCle 3.0	x16	x16	0	Full Length/Full Height	For processor 1
2	PCle 3.0	x4	x8	0	Full Length/Full Height	For processor 1
1	PCle 3.0	x8	x16	0	Full Lenath/Full Height	For processor 1

NOTE: Bus number - Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number.

NOTE: Nine total expansion slots. Three PCle 3.0 x16 (x16 speed); One PCle 3.0 x16 (x8 speed); Four PCle 3.0 x8 (x4 speed); One PCle 2.0 x8 (x4 speed).

Storage Controller One of the following depending on Model

Entry Models HP Dynamic Smart Array B140i

Base Models HP Flexible Smart Array P440ar/2GB

Performance Models HP Flexible Smart Array P440ar/2GB

Internal Storage
Devices
One of the following

depending on Model

Optical Drive Optional SATA 9.5mm DVD-ROM Optical Drive

Optional SATA 9.5mm DVD RW Optical Drive

NOTE: Optical is optional in entry, base and performance pre-configured models.

Hard Drives None ship standard

Hard Drive Bays (8) Hot plug SFF SAS/SATA HDD bays; upgradable to (48) (8) Hot Plug LFF SAS/SATA HDD Bays; upgradable to (24)

NOTE: All pre-configured models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using either P/N 666987-B21: HP SFF HDD Blank Kit or P/N 666986-B21: HP LFF

HDD Blank Kit. These part numbers for single HDD blanks below are also provided should the customer require replacement HDD blanks for their server.

Maximum Internal Storage

One of the following depending on Model

	CAPACITY	CONFIGURATION
Hot Plug LFF SAS	144TB	24 x 6TB
Hot Plug LFF SATA	144TB	24 x 6TB
Hot Plug SFF SAS	48TB	48 x 1TB
Hot Plug SFF SATA	57.6TB	48 x 1.2TB
Hot Plug SFF SATA SSD	76.8TB	48 x 1.6TB
Hot Plug SFF SAS SSD	76.8TB	48 x 1.6TB
Hot Plug LFF SATA SSD	38.4TB	24 x 1.6TB

Power Supply

One of the following depending on Model

HP 500W Flex Slot Platinum Hot Plug Power Supply HP 800W Flex Slot Platinum Hot Plug Power Supply

HP 1400W Flex Slot Platinum Plus Hot Plug Power Supply

HP Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HP ProLiant Gen9 Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.





All pre-configured server models ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the ProLiant Power Cables web page.

To review the power requirements for your selected system, please use the HP Power Advisor Tool located at www.hp.com/go/hppoweradvisor.

Power specifications and technical content for all HP Server power supplies can be found at www.hp.com/qo/proliant/powersupply.

NOTE: Mixing of power supplies in the same server is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server.

System FansOne of the following depending on Model

Non-redundant Redundant
1P model 3 fans 6 fans

NOTE: Fan Redundancy is standard in performance model. Option 725878-B21 includes four fans and PCIe

baffles are required for fan redundant kit.

Non-redundant Redundant 2P model 4 fans 8 fans

Interfaces

Serial 1
Video 1 (rear)
Network RJ-45 (Ethernet) 4

HP iLO Remote Management Network 1 Gb Dedicated

Port

SD Slot 1 (internal)

NOTE: The Micro-SD slot is not a hot-pluggable device. Customers should not attempt to plug a Micro-SD card

into the Micro-SD slot while the server is powered.

USB 2.0 Ports 5 (2 front, 2 rear, 1 internal)

USB 3.0 3 (2 rear, 1 internal)

Operating Systems and Virtualization Software Support for ProLiant Servers

Microsoft Windows Server

Canonical Ubuntu

Red Hat Enterprise Linux (RHEL)
SUSE Linux Enterprise Server (SLES)

VMware

Citrix XenServer

NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: http://www.hp.com/go/ossupport and our driver download page http://www.hp.com/support/ML350Gen9.

Upgradeability

Upgradable for two processors (Up to 18 Cores)

NOTE: Total 6, 8, 10, 12, 14, 16, 18 cores.

Up to 24 DIMM slots available for higher Memory capacity Up to 48 SFF Hard Drive Bays; Or 24 LFF Hard Drive Bays

8 PCIe 3.0 and 1 PCIe 2.0 I/O slots for additional communications and storage expansion

Redundant Power Supply and Redundant Fans

Optional optical drive (up to 1)
Optional System Insight Display

NOTE: Rack model only.

Industry Standard Compliance

ACPI 2.0b Compliant
PCIe 3.0 Compliant
PXE Support
WOL Support
Novell Certified





IPMI 2.0. SMASH CLP. DCMI 1.0 compliant Microsoft® Logo certifications **USB 3.0 Support SMBIOS 2.7.1** ASHRAE A3/A4 **Energy Star**

Graphics

16 bit color: maximum resolution of 1600 x 1200 Integrated Matrox G200 video standard 32 bit color: maximum resolution of 1280 x 1024

- 16 MB Flash
- 256 MB DDR3

HP Server UEFI/Legacy ROM

HP Server UEFI /Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration while interacting with your server at boot time. HP ProLiant Gen9 platform defaults to UEFI and can be factory or field configured for Legacy BIOS Boot Mode.

NOTE: The UEFI System Utilities function is analogous to the HP ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit http://www.hp.com/go/proliantuefi/docs.

UEFI enables numerous new capabilities specific to HP ProLiant servers such as:

- Secure Boot
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- **Embedded UEFI Shell**
- Mass Configuration Deployment Tool using HP RESTful API.
- PXE boot support for IPv6 networks
- Boot support for option cards that only support a UEFI option ROM

For more information please visit www.hp.com/go/proliant/uefi.

NOTE: For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

NOTE: HP UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory.

Form Factor

Tower or Rack (5U)

Embedded Management

HP Integrated

Monitor your servers for ongoing management, service alerting, reporting and remote **Lights-Out (HP iLO)** management with iLO. Learn more at www.hp.com/go/ilo.

UEFI Configure and boot your servers securely with industry standard Unified Extensible

Firmware Interface (UEFI). Learn more at www.hp.com/go/ProLiant/uefi.

HP RESTful API RESTful API is an application programming interface. RESTful Web Service API served by

iLO's web server. Learn more at www.hp.com/go/restfulapi.

Intelligent **Provisioning**

Provision servers by discovering and deploying 1 to few servers with Intelligent

Provisioning. Learn more at www.hp.com/go/intelligentprovisioning.

Embedded Remote Support

HP's embedded remote support, used with Insight Online direct connect or HP Insight Remote Support, allows HP ProLiant servers to transmit hardware events directly to HP or





an HP Authorized Partner for automated phone home support. Learn more at www.hp.com/go/insightonline/info.

_					
Se	ru	۵r	111	Hil	ίρο

HP Smart Update

Optimize firmware and driver updates with HP Smart Update solutions.

Learn more at www.hp.com/go/smartupdate.

HP Systems Insight Manager (HP

SIM)

HP SIM allows you to monitor the health of your HP ProLiant Servers and HP Integrity Servers, and also provides you with basic support for non-HP

servers.

HP SIM also integrates with HP SUM to provide quick and seamless firmware

updates. Learn more at www.hp.com/go/sim.

Scripting Tool Kit and Windows

PowerShell

Provision 1 to many servers using your own scripts to discover and deploy them with HP Scripting Tool Kit for Windows and Linux or HP Scripting Tools for Windows PowerShell. Learn more at www.hp.com/go/ProLiantSTK or

www.hp.com/go/powershell.

HP RESTful Interface Tool HP RESTful Interface tool is a scripting tool to provision servers using

RESTful API Interface to discover and deploy servers at scale. Learn more at

www.hp.com/go/restfulapi.

HP iLO Mobile Application Enables the ability to access, deploy, and manage your server anytime from

anywhere from select smartphones and mobile devices. For additional

information please visit: www.hp.com/go/ilo/mobileapp.

HP Insight Online HP Insight Online, available at no additional cost as part of your HP

warranty, Care Pack or contractual support agreement with HP, is a personalized dashboard for simplified tracking of IT operations and support

information from anywhere, anytime. Learn more at

www.hp.com/go/insightonline/info.

NOTE: The Service Pack for ProLiant (which includes HP SUM) can be downloaded from

www.hp.com/go/spp/download. More information can be found: http://www.hp.com/go/SmartUpdate,

www.hp.com/go/spp and http://www.hp.com/go/hpsum.

Security

Power-on password Setup password Serial interface control Power switch security Administrator's password

TPM 1.2 UEFI

Warranty

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html.



Optional Features

Embedded Management

iLO Advanced

HP iLO Advanced licenses offer smart remote functionality without compromise, for all HP ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HP iLO Advanced at www.hp.com/go/iloadvanced.

Server Management HP Insight Control

HP Insight Control, lets you deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see http://www.hp.com/go/insightcontrol.

HP OneView

Powerful converged management of servers, storage, and network for IT service automation and infrastructure simplicity, see www.hp.com/go/oneview.

NOTE: HP OneView support for HP ProLiant Gen9 rack (DL) and blade (BL) servers will be available with a future version of HP OneView to be released Early 2015. Customers may purchase HP OneView licenses now, and will be granted rights to use HP Insight Control software and transition to HP OneView with a free upgrade, when available. Customers also have the option to purchase HP Insight Control.

HP Insight Cluster Management Utility (CMU)

HP Insight Cluster Management Utility is a hyperscale-optimized management framework that includes software for the provisioning, control, performance management and monitoring of groups of nodes and infrastructure. Learn more at www.hp.com/go/cmu.

Rack and Power Infrastructure

HP Rack and Power Infrastructure products and services create highly efficient and intelligent solutions for existing or new IT data centers. HP Rack and Power infrastructure solutions – rack infrastructure, power protection and management, performance optimized data centers (PODs) – are the foundation you are looking for to help secure your long-term IT success. These products are designed to help you react to changes in the industry. They deliver efficient, easy-to-use capabilities to manage, monitor, deploy and provision infrastructure from entry to enterprise. As an industry leader, HP is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

Learn more at HP Rack and Power Infrastructure.

HPC Interconnects

NOTE: High Performance Computing (HPC) interconnect technologies are available for this server under the HP Cluster Platform product portfolio. These high-speed interconnects are fully supported by HP when they are part of these configure to order clusters. Solutions can be defined with a lot of flexibility with the help of configuration tools. Please visit the following URL to configure HPC Clusters with InfiniBand Interconnects: http://www.hp.com/techservers/clusters/ucp/index.html.

Storage Software

Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than HP storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities.

Storage software that gets the job done:

Data Protection and Recovery Software

Whether you're a large enterprise or a smaller business, HP data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.

Data Archive and Migration Software

HP's storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.

Storage Resource Management Software (SRM)

HP's storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.

Data Replication Software

HP offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting.





Optional Features

• Storage Device Management Software

Maximize your investment in HP storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management.

HP StoreVirtual VSA

With HP StoreVirtual VSA you can use the power of virtualization to create a virtual array within your host server. Manage it as a single pool of shared storage capacity, and scale it to match your evolving needs. HP ProLiant Gen9 servers include a 3-year limited license for HP StoreVirtual VSA software with 1TB of capacity at no extra cost. Simply select to install HP StoreVirtual VSA software during server setup within Intelligent Provisioning. More information, instructional videos, and free console management software are available at www.hp.com/qo/vsa1TB.

NOTE: For more information about Storage Software including QuickSpecs, please see: www.hp.com/go/storage/software.

One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact HP's Customer Business Center or an Authorized Partner for assistance. http://www.hp.com/products/configurator.





Service and Support

HP Technology Services

HP Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to HP to help prevent problems and solve issues faster. Our support technology lets you to tap into the knowledge of millions of devices and thousands of experts to stay informed and in control, anywhere, any time.

HP Care Pack Services

Protect your business HP Care Pack Services enable you to order the right service level, length of coverage and response time as beyond warranty with you purchase your new server, giving you full entitlement for the term you select.

Optimized Support recommendation

HP Proactive Care - Call to Repair commitment, 24x7 coverage, three year Care Pack Service

Prevent problems and stabilize IT by utilizing secure, real-time, predictive analytics and proactive consultations when your products are connected to HP. Includes enhanced escalation management and the industry's highest level of hardware support commitment – hardware will be returned to operating conditions within six (6) hours after you open your case. Comes with collaborative software call management with two hour call back to reduce troubleshooting.

As a leading global support provider for Microsoft, Red Hat, VMware, SUSE and other operating systems, HP is able to simplify and shorten your time to resolution with one call for hardware or software questions. http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf.

HP ProLiant Server Hardware Installation

Help ensure your new HP ProLiant hardware is installed smoothly, efficiently and with minimal disruption to your IT and business operations. http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf.

Standard Support recommendation

HP Proactive Care - 24x7 coverage, three year Care Pack Service

This service helps prevent problems and stabilize IT by utilizing secure, real-time, predictive analytics and proactive consultations when your products are connected to HP. Includes four hour response for hardware, and collaborative call management for software with a two hour callback. http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf.

HP ProLiant Hardware Installation

Help ensure your new HP ProLiant hardware is installed smoothly, efficiently and with minimal disruption to your IT and business operations. http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf.

Related Services

Data Center Platform Consulting Services

These services help modernize key systems and leverage new technology to support a changing business climate and prepare you for the new style of IT. HP understands the needs of the data center of the future and will serve as your guide for the journey. www.hp.com/services/consulting

Data Privacy Services

Protect your data through better media management. HP Data privacy services help manage and protect sensitive data. www.hp.com/services/dataprivacy

Factory Express for Servers and storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Choose how your factory solutions are built, tested, integrated, shipped and deployed. http://www.hp.com/go/factory-express.

HP Foundation Care

Hardware and software support services provide easy connection to HP to resolve support issues quickly. Includes collaborative call management for industry leading software; full software support may also be purchased, giving you one place to call for help. www.hp.com/services/foundationcare.

Additional HP Care Pack services can be found at: www.hp.com/go/cpc.

Parts and Materials

HP will provide HP-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.





Service and Support

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HP due to malfunction.





Pre-configured Models

For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

- 1. Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.
- 2. HP does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.
- 3. If you desire a custom configuration please see "Configuration Information Factory Integrated Models" section of this QuickSpecs.

NOTE: All pre-configured servers come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using either P/N 666987-B21: HP SFF Hard Drive Blank Kit or P/N 666986-B21: HP LFF Hard Drive Blank Kit. **NOTE:** All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (AOKO2A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the ProLiant Power Cables web page.

Caution: HP recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

	Entry Models	Base Models	
[SKU Number]	765819-001	765820-001	
Model Name	HP ProLiant ML350 Gen9 E5-2609v3 8GB-R B140i 8LFF 500W PS Entry Server	HP ProLiant ML350 Gen9 E5-2620v3 16GB-R P440ar 8SFF 500W PS Base Server	
Processor	Intel® Xeon® E5-2609v3	Intel® Xeon® E5-2620v3	
Number of Processors	0	ne	
Memory	8GB (1x8GB Registered DIMMs, 2133 MHz)	16GB (1x16GB Registered DIMMs, 2133 MHz)	
Network Controller	HP Embedded 1Gb Ethe	rnet 4-port 331i Adapter	
Storage Controller	HP Dynamic Smart Array B140i	HP Smart Array P440ar/2G Controller	
Hard Drive	None ship standard; includes 6 LFF hard drive blanks	None ship standard; includes 6 SFF hard drive blanks	
Internal Storage	8 LFF HDD Bays (upgradable to 24)	(8) Hot plug SFF SAS/SATA HDD bays; upgradable to (48)	
Optical Drive Bay	1; (Optional: DVD-ROM, DVD-RW)		
Optical Drive	Optional Slim Optical Bay (SA	TA DVD-RW/ROM Optical Drive)	
PCI-Express Slots	9 PCI	e slots	
Power Supply	(1) HP 500W Flex Slot	Platinum Power Supply	
Fans	3 hot plug fans, non-redundant		
Management	iLO Management (standard), Intelligent Provisioning (sta	ndard), iLO Advanced (optional), Insight Control (optional)	
Form Factor	Tower (5U)		
Warranty	Server Warranty includes 3-Year Parts, 3-Year Labor,	3-Year Onsite support with next business day response	

	Energy Star Models	Performance Models		
[SKU Number]	765821-001	765822-001		
Model Name	HP ProLiant ML350 Gen9 2xE5-2630v3 2P 32GB-R P440ar 8SFF 2x800W PS ES Rack Server	HP ProLiant ML350 Gen9 2xE5-2650v3 2P 32GB-R P440ar 8SFF 2x800W PS ES Tower Server		
Processor	Intel® Xeon® E5-2630v3	Intel® Xeon® E5-2650v3		
Number of Processors	Т	wo		
Memory	32GB (2x16GB Registe	ered DIMMs, 2133 MHz)		
Network Controller	HP Embedded 1Gb Ethe	rnet 4-port 331i Adapter		
Storage Controller	HP Smart Array P4	140ar/2G Controller		
Hard Drive	None ship standard; includes 6 SFF hard drive blanks			
Internal Storage	(8) Hot plug SFF SAS/SATA HDD bays; upgradable to (48)			
Optical Drive Bay	1; (Optional: DVD-ROM, DVD-RW)	Optional Slim Optical Bay (SATA DVD-RW/ROM Optical Drive)		
Optical Drive	Optional Slim Optical Bay (SA	ATA DVD-RW/ROM Optical Drive)		
PCI-Express Slots	9 PCI	e slots		
Power Supply	(2) HP 800W Flex Slot	Platinum Power Supply		
Fans	8 hot plug fa	ns, redundant		
Management	iLO Management (standard), Intelligent Provisioning (standard), iLO Advanced (optional), Insight Control (optional)			
Energy Star	Meets Energy Star requirements			
Accessories	Rack Kit included			
Form Factor	Rack (5U), HP Easy Install Rails	Tower (5U)		





Pre-configured Models

Warranty	Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response





Configuration Information - Factory Integrated Models

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

- 1. Factory Integrated Models must start with a CTO Server.
- 2. FIO indicates that this option is only available as a factory installable option.
- 3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
- 4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Step 1: Base Configuration (choose one of the following configurable models)

[Chassis]	HP ProLiant ML350 Gen9 Hot Plug 8SFF Configure-to-order Rack Server	HP ProLiant ML350 Gen9 Hot Plug 8SFF Configure-to-order Tower Server	HP ProLiant ML350 Gen9 Hot Plug 8LFF Configure-to-order Tower Server	
SKU Number	754534-B21	754536-B21	754537-B21	
Processor		2 (optional) x HP Smart Socket Guide	S	
DIMMSlots	24 D	24 DIMM slots for RDIMM, LRDIMM DDR4 Memory		
Storage Controller		HP Dynamic Smart Array B140i		
PCIe		9 Standard (8 FH/FL, 1 FH/HL)		
Drive Cage	8SFF I	Hot Plug	8LFF Hot Plug	
Network Controller	HP E	mbedded 1Gb Ethernet 4-port 331i A	dapter	
Fans		3 hot plug fans, non-redundant		
Management	iLO Management (standard), Into	elligent Provisioning (standard), iLO A (optional)	dvanced (optional), Insight Control	
USB		2 front, 2 internal, 4 rear		

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

HP Processors Entry Processors - E5-2600v3 series Processors

HP ML350 Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) FIO Processor Kit	726661-L21
HP ML350 Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W) FIO Processor Kit	726664-L21
Base Processors - E5-2600v3 series Processors	
HP ML350 Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) FIO Processor Kit	726651-L21
HP ML350 Gen9 Intel® Xeon® E5-2630v3 (2.4GHz/8-core/20MB/85W) FIO Processor Kit	726654-L21
HP ML350 Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W) FIO Processor Kit	726658-L21
HP ML350 Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W) FIO Processor Kit	726671-L21
Performance Processors - E5-2600v3 series Processors	
HP ML350 Gen9 Intel® Xeon® E5-2690v3 (2.6GHz/12-core/30MB/135W) FIO Processor Kit	726636-L21
HP ML350 Gen9 Intel® Xeon® E5-2680v3 (2.5GHz/12-core/30MB/120W) FIO Processor Kit	726639-L21
HP ML350 Gen9 Intel® Xeon® E5-2670v3 (2.3GHz/12-core/30MB/120W) FIO Processor Kit	726642-L21
HP ML350 Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W) FIO Processor Kit	726645-L21
HP ML350 Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10-core/25MB/105W) FIO Processor Kit	726648-L21
HP ML350 Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W) FIO Processor Kit	726668-L21
HP ML350 Gen9 Intel® Xeon® E5-2697v3 (2.6GHz/14-core/35MB/145W) FIO Processor Kit	726674-L21
HP ML350 Gen9 Intel® Xeon® E5-2695v3 (2.3GHz/14-core/35MB/120W) FIO Processor Kit	726677-L21
HP ML350 Gen9 Intel® Xeon® E5-2667v3 (3.2GHz/8-core/20MB/135W) FIO Processor Kit	726680-L21
HP ML350 Gen9 Intel® Xeon® E5-2643v3 (3.4GHz/6-core/20MB/135W) FIO Processor Kit	726683-L21
HP ML350 Gen9 Intel® Xeon® E5-2683v3 (2GHz/14-core/35MB/120W) FIO Processor Kit	765794-L21
HP ML350 Gen9 Intel® Xeon® E5-2699v3 (2.3GHz/18-core/45MB/145W) FIO Processor Kit	781828-L21
HP ML350 Gen9 Intel® Xeon® E5-2698v3 (2.3GHz/16-core/40MB/135W) FIO Processor Kit	781830-L21





Configuration Information - Factory Integrated Models

NOTE: If two processors are desired, select one xxxxxx-L21 and one xxxxxx-B21

NOTE: Up to 2 processors supported. Mixing different processor models is not supported.

NOTE: DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

NOTE: For the Intel® C600 Chipset E5-2600 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x v#, 2 = number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, x = L for low power SKUs and v# (not yet designated) = version number

HP Memory

Registered DIMMs (RDIMMs) for E5-2600v3 Series

HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15 Registered Memory Kit 726718-B21 HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit 726719-B21

Load Reduced DIMMs (LRDIMMs) for E5-2600v3 Series

HP 32GB (1x32GB) Ouad Rank x4 DDR4-2133 CAS-15-15 Load Reduced Memory Kit 726722-B21

NOTE: Order quantity one or more of HP Memory kit.

NOTE: LRDIMM, RDIMM are all distinct memory technologies and cannot be mixed within a server. The majority of ProLiant Gen9 servers support LRDIMM and RDIMM.

NOTE: HP memory from previous generation servers are not qualified or warranted with this HP ProLiant Server. HP SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9.

NOTE: If only one processor is installed, only half of the total DIMM slots are available. When populating with two processors all DIMM slots are available.

NOTE: Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: www.hp.com/go/proliant-energy-efficient.

NOTE: Depending on the memory configuration and processor model, the memory speed may run at 2133MHz. 1866MHz, 1600MHz or 1333MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: www.hp.com/go/ddr4memory-configurator

HP Power Supplies

NOTE: Mixing of power supplies in the same server is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server.

NOTE: Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HP Power Advisor tool to determine the right size power supply for your server configuration. The HP Power Advisor is located at: www.hp.com/qo/hppoweradvisor.

HP Flex Slot Platinum Hot-plug Power supplies

HP 500W Flex Slot Platinum Hot Plug Power Supply Kit 720478-B21 HP 800W Flex Slot Platinum Hot Plug Power Supply Kit 720479-B21

Enablement Kit

HP ML350 Gen9 X4 Redundant Power Supply Enablement FIO Kit

NOTE: If more than quantity two of 720478-B21 or 720479-B21 are ordered, then X4 Redundant Power Supply Enablement FIO Kit must be selected.

Step 3: Choose Additional Factory Integratable Options (only one of the following from each list unless otherwise noted)

Embedded B140i Settings

HP Enable Kit Hamer BIOS Setting

784308-B21

725870-B21

NOTE: enable the embedded B140i controller for RAID and Hot-plug capabilities

HP Legacy FIO Mode Setting

NOTE: UEFI is the default, this part can be used to enable Legacy mode. If Legacy FIO Mode Setting is selected, then the embedded B140i will no longer be a primary controller and an HP Storage Controller must be selected.

HP Storage Controllers NOTE: The embedded SATA controller will be used as the primary controller if no controller has been selected from the list below. Embedded SATA controller can support up to 8 SATA hard drives.

SAS Controller

HP Smart Array P440ar/2GB FBWC 12Gb 2-ports Int FIO SAS Controller	749974-B21
HP H240ar 12Gb 1-port Int FIO Smart Host Bus Adapter	749976-B21
HP Smart Array P440/4GB FBWC 12Gb 1-port Int FIO SAS Controller	761872-B21





Configuration Information - Factory Integrated Models

HP Smart Array P840/4GB FBWC 12Gb 2-ports Int FIO SAS Controller 761874-B21

HP Cable Options

HP ML350 Gen9 Mini SAS Cable FIO Kit 765654-B21

NOTE: If no SAS controller is selected one Mini SAS Cable FIO Kit is required.

NOTE: if total number of hard drives ordered is greater than the controller's supportable hard drives, one Mini

SAS Cable FIO Kit is required.

Embedded HP iLO Advanced

Management HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle FIO Electronic C6N36ABE

License

HP Rack Options HP ML350 Gen9 Discover service FIO Kit 726549-B21

NOTE: this option can only be selected with HP ProLiant ML350 Gen9 Hot Plug 8SFF Configure-to-order Rack

Server.

HP ML350 Gen9 5U Rail FIO Kit 790357-B2

NOTE: this option can only be selected with HP ProLiant ML350 Gen9 Hot Plug 8SFF Configure-to-order Rack

Server

Step 4: Choose Additional Options for Factory Integration from Core and Additional Options sections below.





NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

	t your total sales representative for additional information.	
IP Unique Options	HP ML350 Gen9 8SFF Hard Drive Cage Kit	778157-B21
	HP ML350 Gen9 8LFF Hot Plug Drive Cage Kit	726547-B21
	HP ML350 Gen9 Redundant Fan Kit	725878-B21
	HP ML350 Gen9 Flexible Smart Array Controller Mini-SAS Cable Kit	765652-B21
	HP ML350 Gen9 Smart Array Cable Kit	765650-B21
	HP ML350 Gen9 LFF Media Cage Kit	726561-B21
	HP ML350 Gen9 Host Bus Adapter Mini-SAS Cable Kit	765648-B21
	HP ML350 Gen9 Graphic Card Support Kit	726565-B21
	HP ML350 Gen9 SFF Media Cage Kit	726545-B21
	HP ML350 Gen9 Tower to Rack Conversion Kit	726567-B21
	HP ML350 Gen9 System Insight Display Kit	726563-B21
HP Processors	Entry Processors - E5-2600v3 series Processors	
	HP ML350 Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) Processor Kit	726661-B21
	HP ML350 Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W) Processor Kit Base Processors - E5-2600v3 series Processors	726664-B21
	HP ML350 Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) Processor Kit	726651-B21
	HP ML350 Gen9 Intel® Xeon® E5-2630v3 (2.4GHz/8-core/20MB/85W) Processor Kit	726654-B21
	HP ML350 Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W) Processor Kit	726658-B21
	HP ML350 Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W) Processor Kit	726671-B21
	Performance Processors - E5-2600v3 series Processors	
	HP ML350 Gen9 Intel® Xeon® E5-2690v3 (2.6GHz/12-core/30MB/135W) Processor Kit	726636-B21
	HP ML350 Gen9 Intel® Xeon® E5-2680v3 (2.5GHz/12-core/30MB/120W) Processor Kit	726639-B21
	HP ML350 Gen9 Intel® Xeon® E5-2670v3 (2.3GHz/12-core/30MB/120W) Processor Kit	726642-B21
	HP ML350 Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W) Processor Kit	726645-B21
	HP ML350 Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10-core/25MB/105W) Processor Kit	726648-B21
	HP ML350 Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W) Processor Kit	726668-B21
	HP ML350 Gen9 Intel® Xeon® E5-2697v3 (2.6GHz/14-core/35MB/145W) Processor Kit	726674-B21
	HP ML350 Gen9 Intel® Xeon® E5-2695v3 (2.3GHz/14-core/35MB/120W) Processor Kit	726677-B21
	HP ML350 Gen9 Intel® Xeon® E5-2667v3 (3.2GHz/8-core/20MB/135W) Processor Kit	726680-B21
	HP ML350 Gen9 Intel® Xeon® E5-2643v3 (3.4GHz/6-core/20MB/135W) Processor Kit	726683-B21
	HP ML350 Gen9 Intel® Xeon® E5-2683v3 (2GHz/14-core/35MB/120W) Processor Kit	765794-B21
	HP ML350 Gen9 Intel® Xeon® E5-2699v3 (2.3GHz/18-core/45MB/145W) Processor Kit	781828-B21
	HP ML350 Gen9 Intel® Xeon® E5-2698v3 (2.3GHz/16-core/40MB/135W) Processor Kit	781830-B21
HP Memory	Registered DIMMs (RDIMMs) for E5-2600v3 Series	
	HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726718-B21
	HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726719-B21
	Load Reduced DIMMs (LRDIMMs) for E5-2600v3 Series	
	HP 32GB (1x32GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726722-B21
HP Optical Drives	HP 9.5mm SATA DVD-ROM JackBlack Gen9 Optical Drive	726536-B21
	HP 9.5mm SATA DVD-RW JackBlack G9 Optical Drive	726537-B21
HP Drives	SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives	
	HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Dual Port Enterprise 3yr Warranty Hard Drive	718162-B21
	HP 900GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652589-B21





HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759212-B21
HP 600GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652583-B21
HP 450GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759210-B21
HP 450GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652572-B21
HP 300GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759208-B21
HP 300GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652564-B21
HP 146GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652605-B21
SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives	
HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	652745-B21
SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives	
HP 450GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	737394-B21
HP 300GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	737261-B21
HP 600GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	765424-B21
SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives	
HP 6TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	761477-B21
HP 4TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	695510-B21
HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652766-B21
HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652757-B21
HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652753-B21
SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives	032733 021
HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	655710-B21
SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives	033710 021
HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	753874-B21
HP 4TB 6G SATA 7.2k rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	693687-B21
HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	628061-B21
HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	658079-B21
HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	657750-B21
HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	658071-B21
SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives	030071-021
HP ML350 Gen9 8SFF Hard Drive Cage Kit	778157-B21
•	//015/-D21
12G SAS Hot Plug SFF (2.5-inch) Enterprise Performance Solid State Drives	7411F0 D21
HP 800GB 12G SAS High Endurance SFF 2.5-in SC Enterprise Performance 3yr Wty Solid State Drive	741159-B21
HP 400GB 12G SAS High Endurance SFF 2.5-in SC Enterprise Performance 3yr Wty Solid State Drive	741155-B21
HP 200GB 12G SAS High Endurance SFF 2.5-in SC Enterprise Performance 3yr Wty Solid State Drive	741151-B21
12G SAS Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives	
HP 800GB 12G SAS Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	741146-B21
HP 400GB 12G SAS Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	741142-B21
HP 200GB 12G SAS Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	741138-B21
12G SAS Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives	
HP 1.6TB 12G SAS Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	762263-B21
HP 800GB 12G SAS Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	762261-B21
12G SAS Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives	
HP 800GB 12G SAS Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	762270-B21
HP 1.6TB 12G SAS Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	762272-B21





CC CATA Hat Dive CET (3 E inch) Entennying Mainstroom Colid State Drives	
6G SATA Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives	CO10CO B31
HP 800GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691868-B21
HP 400GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691866-B21
HP 200GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691864-B21
HP 100GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691862-B21
6G SATA Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives	
HP 800GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	717973-B21
HP 600GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	739898-B21
HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	717971-B21
HP 300GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	739888-B21
HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	717969-B21
6G SATA Hot Plug SFF (2.5-inch) Enterprise Boot Solid State Drives	
HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Boot 3yr Wty Solid State Drive	717965-B21
HP 80GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Boot 3yr Wty Solid State Drive	734360-B21
6G SATA Hot Plug LFF (3.5-inch) Enterprise Mainstream Solid State Drives	
HP 800GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691860-B21
HP 400GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691856-B21
HP 200GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691854-B21
HP 100GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691852-B21
6G SATA Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives	
HP 800GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	718189-B21
HP 600GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	739900-B21
HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	718183-B21
HP 300GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	739890-B21
HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	718177-B21
6G SATA Hot Plug LFF (3.5-inch) Enterprise Boot Solid State Drives	
HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Boot 3yr Wty Solid State Drive	718171-B21
HP 80GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Boot 3yr Wty Solid State Drive	734362-B21
Hard Drive Blank Kits	
HP Large Form Factor Hard Drive Blank Kit	666986-B21
HP Small Form Factor Hard Drive Blank Kit	666987-B21
Hard Drive Kits	
HP ML350 Gen9 SFF Media Cage Kit	726545-B21
HP ML350 Gen9 8LFF Hot Plug Drive Cage Kit	726547-B21
HP ML350 Gen9 LFF Media Cage Kit	726561-B21
HP ML350 Gen9 8SFF Hard Drive Cage Kit	778157-B21
Disk Enclosures	
HP D2600 w/12 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 48TB Bundle	E7W32A
1 Gigabit Ethernet adapters	
HP Ethernet 1Gb 2-port 361T Adapter	652497-B21
HP Ethernet 1Gb 2-port 332T Adapter	615732-B21
10 Gigabit Ethernet adapters	



HP Networking



HP Ethernet 10Gb 2-port 560SFP+ Adapter	665249-B21
HP Ethernet 10Gb 2-port 530T Adapter	656596-B21
HP Ethernet 10Gb 2-port 530SFP Adapter	652503-B21
HP Ethernet 10Gb 2-port 561T Adapter	716591-B21
HP StoreFabric CN1200E 10Gb Converged Network Adapter	E7Y06A

HP InfiniBand

HP InfiniBand FDR 2-port 545QSFP Adapter

702211-B21

HP Power Supplies

NOTE: Mixing of power supplies in the same server is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server.

NOTE: Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HP Power Advisor tool to determine the right size power supply for your server configuration. The HP Power Advisor is located at: www.hp.com/go/hppoweradvisor.

HP Flex Slot Platinum Hot-plug Power supplies

HP 500W Flex Slot Platinum Hot Plug Power Supply Kit	720478-B21
HP 800W Flex Slot Platinum Hot Plug Power Supply Kit	720479-B21

HP Computation and HP ML350 Gen9 Graphic Card Support Kit

726565-B21

730874-B21

Graphics Accelerators NOTE: One Graphic Card Support Kit is required for each computation or graphics accelerator.

NVIDIA Quadro K6000 PCI-E Graphics Adapter

NOTE: A maximum of four Graphics cards can be selected. Each requires one Graphic Card Support Kit (726565-B21).

NOTE: If this SKU is selected then at least two of 800W Power Supply Kit (725870-B21) must

be selected. HP NVIDIA Quadro K5200 GPU Graphics Accelerator

JOG91A

NOTE: A maximum of four of Graphics cards can be selected. Each requires one Graphic Card Support Kit (726565-B21).

HP NVIDIA Quadro K4200 Graphics Accelerator

JOG90A

NOTE: A maximum of four Graphics cards can be selected. Each requires one Graphic Card Support Kit (726565-B21).

NOTE: Only the above listed Graphics cards are HP standard supported options in this server.

NOTE: The NVIDIA Quadro modules are supported only on 64-bit versions of Linux and Windows operating systems as well as on Virtual Machine client operating systems. The supported bare metal operating systems are RHEL6, SLES 11 and Windows Server 2012 R2

NOTE: Please see the HP Power Advisor for estimated power consumption of your individual system configuration prior to installing GPUs. The HP Power Advisor is located at: www.hp.com/go/hppoweradvisor.

HP Cooling Options

HP ML350 Gen9 Redundant Fan Kit

725878-B21

NOTE: 4 fans are included





NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

Insight Softwa	

HP Insight Software HP Insight Control

HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License	C6N27A
HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License	C6N28ABE
HP Insight Control Server Provisioning Media Kit	BD883A
HP Insight Management Media Kit	C6N31A

Embedded Management

HP iLO Advanced

HP iLO Advanced 1 Server License with 3yr 24x7 Tech Support and Updates	BD505A
HP iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU	E6U59ABE
HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License	512485-B21
HP iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU	E6U64ABE
HP iLO Advanced Electronic License with 3yr 24x7 Tech Support and Updates	BD506AAE
HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle FIO Electronic License	C6N36ABE
HP iLO Advanced including 1yr 24x7 Technical Support and Updates Electronic License	TA850AAE

HP Security

HP Trusted Platform Module Option

488069-B21 660584-B21

HP Security Bezel Kit

NOTE: Supported only on rack models.

NOTE: The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline. For more information about TPM, including a white paper, go to: www.hp.com/go/TPM.

NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment.

NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.

HP Storage Controllers

SAS Controller

HP Smart Array P440ar/2GB FBWC 12Gb 2-ports Int SAS Controller NOTE: Smart Storage Battery included	726736-B21
HP H240ar 12Gb 1-port Int Smart Host Bus Adapter	726757-B21
HP Smart Array P440/4GB FBWC 12Gb 1-port Int SAS Controller	726821-B21
HP Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller	726825-B21
HP Smart Array P840/4GB FBWC 12Gb 2-ports Int SAS Controller	726897-B21
SAS Controller Options	
HP 96W Smart Storage Battery with 145mm Cable for DL/ML/SL Servers	727258-B21
HP Cable Options	
HP ML350 Gen9 Host Bus Adapter Mini-SAS Cable Kit	765648-B21
HP ML350 Gen9 Smart Array Cable Kit	765650-B21
HP ML350 Gen9 Flexible Smart Array Controller Mini-SAS Cable Kit	765652-B21

HP Tape Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media see: http://www.hp.com/go/tape. For hardware and software compatibility of HP tape backup products see: http://www.hp.com/storage/SPOCK and http://www.hp.com/go/ebs.

Tape Drives

HP StoreEver LTO-6 Ultrium 6650 SAS Internal Tape Drive	EH963A
HP StoreEver LTO-6 Ultrium 6650 SAS External Tape Drive	EH964A





HP StoreEver LTO-6 Ultrium 6250 Internal Tape Drive	EH969A
HP StoreEver 1/8 G2 LTO-6 Ultrium 6250 FC Tape Autoloader	COH19A
HP StoreEver LTO-6 Ultrium 6250 Tape Drive in 1U Rack-mount Kit	COL99A
HP StoreEver LTO-3 Ultrium 920 SAS Internal Tape Drive	EH847B
HP StoreEver LTO-3 Ultrium 920 SAS External Tape Drive	EH848B
HP StoreEver LTO-4 Ultrium 1760 SAS Internal WW Tape Drive	EH919B
HP StoreEver LTO-4 Ultrium 1760 SAS External Tape Drive	EH920B
HP StoreEver LTO-4 Ultrium 1760 SAS (1) in 1U Rack-mount Kit	EH946C
HP StoreEver LTO-5 Ultrium 3000 SAS Internal Tape Drive	EH957B
HP StoreEver LTO-5 Ultrium 3000 SAS External Tape Drive	EH958B
HP StoreEver LTO-5 Ultrium 3000 SAS Tape Drive in 1U Rack-mount	EJ014B
HP StoreEver LTO-5 Ultrium 3280 SAS Internal Tape Drive	EH899B
HP StoreEver LTO-5 Ultrium 3280 SAS External Tape Drive	EH900B
HP StoreEver LTO-5 Ultrium 3280 SAS Tape Drive in 3U Rack-mount	EJ013B
HP StoreEver LTO-6 Ultrium 6250 External Tape Drive	EH970A
HP StoreEver 1U SAS Rack-mount Kit	AE459B
HP Tape Storage Systems	
HP StoreEver MSL6480	
HP StoreEver MSL6480 Scalable Expansion Module	QU626A
NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
http://h18000.www1.hp.com/products/quickspecs/14604_na/14604_na.html	0116354
HP StoreEver MSL6480 Scalable Base Module	QU625A
HP MSL2024 0-Drive Tape Library	AK379A
HP MSL4048 0-Drive Tape Library	AK381A
HP MSL Library Extender Kit	AQ746A
HP RDX Removable Disk Backup Systems USB	
HP RDX 2TB USB3.0 Internal Disk Backup System	E7X52A
NOTE: For the complete range of RDX drives and media see: http://www.hp.com/go/rdx.	
For hardware and software compatibility of HP disk backup products see:	
http://www.hp.com/storage/SPOCK.	
NOTE: The following is a list of all Fibre Channel Host Bus Adapters for Windows and Linux. For de	etailed compatibility
information please see: http://h18006.www1.hp.com/storage/saninfrastructure/hba.html.	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
Emulex Fibre Channel HBAs	
HP 81E 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AJ762B
HP 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ763B
HP StoreFabric SN1100E 16Gb Single Port Fibre Channel Host Bus Adapter	C8R38A
HP StoreFabric SN1100E 16Gb Dual Port Fibre Channel Host Bus Adapter	C8R39A
QLogic Fibre Channel HBAs	
HP 81Q 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AK344A
HP 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ764A
HP StoreFabric SN1000Q 16GB 1-port PCIe Fibre Channel Host Bus Adapter	QW971A
HP StoreFabric SN1000Q 16GB 2-port PCIe Fibre Channel Host Bus Adapter	QW972A
Converged Network Adapter	
HP StoreFabric CN1100R Dual Port Converged Network Adapter	QW990A

HP Disk Storage Systems

HP Disk Backup

HP Storage Options

Disk Enclosures

HP D6000 Dual I/O Module Disk Enclosure

QQ695A





NOTE: See the D6000 Disk Enclosure QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: http://h18000.www1.hp.com/products/quickspecs/14419_na/14419_na.html

HP D6000 w/35 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 140TB Bundle	E7W30A
HP D6000 w/70 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 280TB Bundle	E7W31A
HP D6000 w/35 2TB 6G SAS 7.2K LFF Dual port MDL HDD 70TB Bundle	QQ697A
HP D6000 w/70 2TB 6G SAS 7.2K LFF Dual port MDL HDD 140TB Bundle	QQ698A
HP D6000 w/35 3TB 6G SAS 7.2K LFF Dual port MDL HDD 105TB Bundle	QQ699A
HP D6000 w/70 3TB 6G SAS 7.2K LFF Dual port MDL HDD 210TB Bundle	QQ700A

HP Data Center Racks Rack 10000 G2 series

HP 11648 1075mm Pallet Universal Rack	H6J87A
HP 11648 1075mm Shock Universal Rack	H6J88A
HP 11642 1075mm Pallet Universal Rack	H6J65A
HP 11642 1075mm Shock Universal Rack	H6J66A
HP 11642 1200mm Pallet Universal Rack	H6J67A
HP 11642 1200mm Shock Universal Rack	H6J68A
HP 11636 1075mm Pallet Universal Rack	H6J77A
HP 11636 1075mm Shock Universal Rack	H6J78A
HP 11622 G2 1075mm Pallet Universal Rack	H6J83A
HP 11622 G2 1075mm Shock Universal Rack	H6J84A
HP 11614 1075mm Shock Universal Rack	H6J82A

NOTE: Please see the HP 11000 G2 Series Racks QuickSpecs for information on additional racks options and rack specifications.

HP Intelligent Series Rack

HP 647 1075mm Pallet Intelligent Series Rack	BW911A
HP 647 1075mm Shock Intelligent Series Rack	BW912A
HP 647 1200mm Pallet Intelligent Series Rack	BW913A
HP 647 1200mm Shock Intelligent Series Rack	BW914A
HP 642 1075mm Pallet Intelligent Series Rack	BW903A
HP 642 1075mm Shock Intelligent Series Rack	BW904A
HP 642 1200mm Pallet Intelligent Series Rack	BW907A
HP 642 1200mm Shock Intelligent Series Rack	BW908A
HP 636 1075mm Pallet Intelligent Series Rack	BW895A
HP 636 1075mm Shock Intelligent Series Rack	BW896A
HP 842 1075mm Pallet Intelligent Series Rack	BW917A
HP 842 1075mm Shock Intelligent Series Rack	BW918A

NOTE: Please see the HP Intelligent Series Racks QuickSpecs for information on additional racks options and rack specifications.

HP Value Series Rack

HP V142 1075mm deep Pallet 100 series Rack

AF046A

NOTE: Please see the HP Value Series Rack QuickSpecs for information on additional racks options and rack specifications.

HP Power Distribution Units (PDUs)

HP Basic Power Distribution Unit (bPDU)

HP 4.9kVA 24A High Voltage NA/JP Core Modular Power Distribution Unit	252663-D74
HP 8.3kVA 40A High Voltage NA/JP Core Modular Power Distribution Unit	252663-D75
HP 17.3kVA 48A Three Phase NA/JP Modular Power Distribution Unit	AF511A
HP 3.6kVA 200-240 Volt Detachable C20 Input (12xC13) WW Basic PDU	H5M56A
HP 4.9kVA 208 Volt L6-30 Input (20xC13) NA/JP Basic PDU	H5M58A





NOTE: To learn more about HP Basic Power Distribution Units (bPDU), please visit the HP website at www.hp.com/go/pdu.

HP Monitored	Power Distribution	Units (mPDII)

D9N43A
D9N45A
D9N47A
D9N59A

NOTE: Please see the HP Monitored Power Distribution Units QuickSpecs for information on additional options and product specifications.

HP Intelligent Power Distribution Units (iPDU)

HP 4.9kVA 24A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF520A
HP 8.3kVA 40A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF521A
HP 8.6kVA 24A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF522A
HP 17.3kVA 48A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF523A
HP 17.3kVA 48A 208V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit	AF535A
HP 4.9kVA 24A Single Phase NA/JP Intelligent Modular Power Distribution Kit	AF531A
HP 8.6kVA 24A Three Phase NA/JP Intelligent Modular Power Distribution Kit	AF532A

NOTE: Please see the HP Intelligent Power Distribution Units QuickSpecs for information on additional options and product specifications.

HP Rack Mount Consoles, KVM Switches, and Keyboards

Rack location options

HP 36U Location Discovery Kit	BW945A
HP 42U Location Discovery Kit	BW946A
HP 47U Location Discovery Kit	BW947A

Rail Kits

HP ML350 Gen9 Tower to Rack Conversion Kit 726567-B21

HP Rack Mount Consoles

HP TFT7600 G2 KVM Console Rackmount Keyboard US Monitor AZ870A

NOTE: Please see the HP Rack Console QuickSpecs for information on additional options and product specifications.

HP KVM Switches

HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software	AF620A
HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software	AF621A
HP Server Console 0x2x8 Port Analog Switch	AF616A
HP Server Console 0x2x16 Port Analog Switch	AF617A
HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software	AF618A
HP 1x4 USB/PS2 KVM Console Switch	AF611A

NOTE: To learn more, please visit the HP KVM Switches web page.

HP USB Keyboard and Mouse

HP USB BFR with PVC Free US Keyboard/Mouse Kit 631341-B21

NOTE: Please see the HP USB Keyboard and Mouse QuickSpecs for information on additional options and product specifications.

Micro SD Options

HP 32GB microSD Enterprise Mainstream Flash Media Kit	700139-B21
HP 8GB microSD Enterprise Mainstream Flash Media Kit	726116-B21
HP 8GB USB Enterprise Mainstream Flash Media Drive Kev Kit	737953-B21

HP Uninterruptible Power Systems (UPS)

HP Tower UPS





HP T1500 G3 1400VA NA Tower Uninterruptible Power System
HP T1000 G3 1000VA NA Tower Uninterruptible Power System
AF448A

HP Rack-mountable UPS

HP R/T3000 G2 2U L530 Low Voltage NA/JP Uninterruptible Power System

AF466A

NOTE: To learn more, please visit the HP Uninterruptible Power Systems (UPS) web page.

HP Care Pack Services Proactive Care

HP 3 year 24x7 ML350 Gen9 Proactive Care Service	U7BG4E
HP 3 year Call to Repair ML350 Gen9 Proactive Care Service	U7BH0E
HP 3 year 24x7 with Defective Media Retention ML350 Gen9 Proactive Care Service	U7BG5E
HP 3 year 24x7 with Comprehensive Defective Material Retention ML350 Gen9 Proactive Care Service	U7BG6E
HP 3 year Call to Repair with Defective Media Retention ML350 Gen9 Proactive Care Service	U7BH1E
HP 3 year CTR with Comprehensive Defective Material Retention ML350 Gen9 Proactive Care Service	U7BH2E





Memory

Memory Subsystem Architecture

Each Intel® Xeon® E5-2600v3 family processor socket contains four memory channels per installed processor with three DIMMs per channel for a total of twelve (12) DIMMs or a grand total of twenty-four (24) DIMMs for the server.

Memory Population guidelines

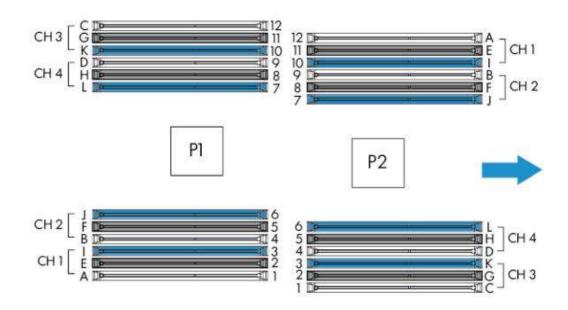

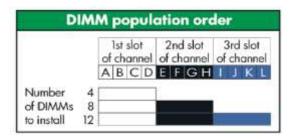

General Memory Population Rules and Guidelines:

- . Install DIMMs only if the corresponding processor is installed.
- . If only one processor is installed in a two processor system, only half of the DIMM slots are available.
 - To maximize performance, it is recommended to balance the total memory capacity between all installed
- processors and load the channels similarly whenever possible.
- . When two processors are installed, balance the DIMMs across the two processors.
- . White DIMM slots denote the first slot to be populated in a channel.
 - Place the DIMMs with the highest number of ranks in the white slot when mixing DIMMs of different ranks on the
- · same channel.
- . Do not mix RDIMMs or LRDIMMs.
- . Quad rank RDIMMs are not supported in HP ProLiant ML350 Gen9 servers.
- . Quad rank LRDIMMs are capable of up to three DIMMs per channel.
- . RDIMMs operating at 1.2V
- . DIMMs of different speeds may be mixed in any order; the server will select a common optimal speed.
- . The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- . The maximum memory capacity is a function of the memory type and number of installed processors.
- . To realize the performance memory capabilities listed in this document, HP SmartMemory is required.





Memory

There are four (4) channels per processor; eight (8) channels per server

There are three (3) DIMM slots for each memory channel; twenty-four (24) total slots

Memory channels 1 and 3 consists of the three (3) DIMMs that are furthest from the processor Memory channel 2 and 4 consists of the three (3) DIMMs that are closest to the processor

Intel Gen9 Supported Memory Bandwidth for HP ProLiant Gen9 Intel® Xeon®E5-2600v3 Series Processor Family

Memory Bandwidth and Capacity

[DIMM Type]	Registered Dimms (RDIMMs)		Load Reduced (LRDIMMs)
DIMM Rank	Single Rank	Dual Rank	Quad Rank
DIMM Capacity	8GB	16GB	32GB
Voltage	-	Std Voltage 1.2V	•
SLOTS THAT CAN BE POPUL	ATED		
24 slot servers		24	
MAXIMUM CAPACITY (GB)			
	192	384	768
1 DIMM Per Channel		2133	
2 DIMM Per Channel		2133	
3 DIMM Per Channel	1600	1600	1600

DIMM slot and configuration diagram

DIMM slot and configuration diagrams

- Population order; start with "A" first, "B" second, "C" third, etc.
- When one processor is installed, install DIMMs in sequential alphabetic order: A, B, C, D, E, F ...
- When two processors are installed, install DIMMs in sequential
- alphabetic order: CPU1-A, CPU2-A, CPU1-B, CPU2-B, CPU1-C, CP2-C

		CPU 1	CPU 2	
	Slot #	population order	Slot # population order	
	1	Α	1 C	
Chnl 1	2	E	2 G	Chnl 1
	3		3 K	
		CPU 1	CPU 2	
	Slot #	population order	Slot # population order	
	4	В	4 D	
Chnl 2	5	F	5 H	Chnl 2
	6	J	6 L	
		CPU 1	CPU 2	
	Slot #	CPU 1 population order	CPU 2 Slot # population order	
	Slot #			
Chnl 3	Slot # 7 8			Chnl 3
Chnl 3	7	population order L	Slot # population order 7 J	Chnl 3
Chnl 3	7 8	population order L H	Slot # population order 7 J 8 F	Chnl 3
Chnl 3	7 8	population order L H D	Slot # population order 7	Chnl 3
Chnl 3	7 8 9	population order L H D CPU 1	Slot # population order 7	Chnl 3
Chnl 3	7 8 9 Slot #	population order L H D CPU 1 population order	Slot # population order 7	Chnl 3



Memory

Memory Speed by Processor Model

Processor Models	Supported Memory Speeds
E5-2609v3, E5-2603v3,	1600MHz
E5-2640v3, E5-2630v3, E5-2620v3, E5-2630Lv3,	1866MHz
E5-2690v3, E5-2680v3, E5-2670v3, E5-2660v3, E5- 2650v3, E5-2650Lv3, E5-2697v3, E5-2695v3, E5-2667v3, E5-2643v3, E5-2683v3, E5-2699v3, E5-2698v3,	2133MHz


Standard and Maximum Memory Capacity (Preconfigured Models)

Pre-Configured Models			Standard Memory Replaced with Optional Memory
E5-2609v3,	8GB (1x8GB)	376GB (23x16GB, 1x8GB)	768GB (24x32GB)
E5-2620v3,	16GB (1x16GB)	384GB (23x16GB, 1x16GB)	768GB (24x32GB)
E5-2630v3, E5-2650v3,	32GB (2x16GB)	384GB (22x16GB, 2x16GB)	768GB (24x32GB)

DDR4 memory options part number decoder

NOTE: Capacity references are rounded to the common gigabyte (GB) values.


- 2GB = 2,048MB
- 4GB = 4,096MB
- 8GB = 8,192MB
- 16GB = 16,384MB
- 32GB = 32,768MB
- 64GB = 65,536MB

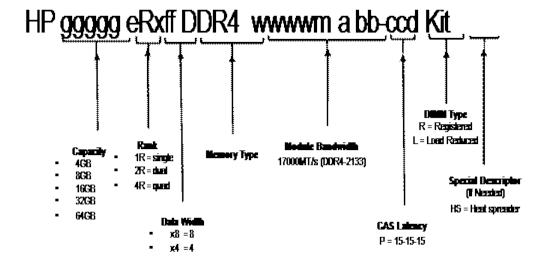




Storage

48 SFF hot-plug drive model

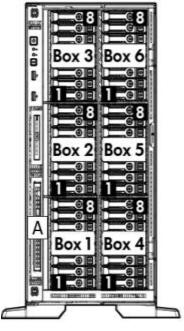

- A Optional Slim DVD-ROM/DVD-RW
- 1-8 8 x SFF SATA/SAS/SSD Hot Pluggable Hard Drive Bays

24 LFF hot-plug drive model

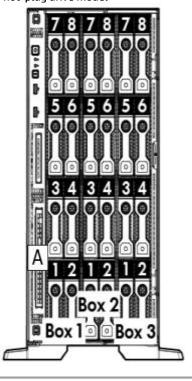

- A Optional Slim DVD-ROM/DVD-RW
- 1-8 8 x LFF SATA/SAS/SSD Hot Pluggable Hard Drive Bays



Technical Specifications

System Unit Tower Dimensions 18.27(H) x 8.62(W) x 30.28(D) in (46.4 x 21.9 x 76.9 cm) **Rack Dimensions**

8.58(H) x 17.51(W) x 29.37(D) in (21.8 x 44.5 x 74.6 cm) **Tower Weight** Minimum:

66.14lb(30kg) Maximum: 121.30lb (55kg)

Rack Weight Minimum: 57.3lb(26kg)

> 112.4lb(51kg) Maximum:

Input Range Line Voltage 100 to 120 VAC Requirements 200 to 240 VAC

BTU Rating Maximum For 800W Power Supply: 3207 BTU/hr (at 100 VAC), 3071 BTU/hr (at

200 VAC), 3112 BTU/hr (at 240 VAC) for China Only

For 500W Power Supply: 1979 BTU/hr (at 100 VAC), 1911 BTU/hr (at

200 VAC), 1965 BTU/hr (at 240 VAC) for China Only

Power **Specifications**

Power Supply Rated Steady-State Output Power

For 1400W Power Supply: 1400W (at 100 VAC), 1400W (at 240 VAC),

1400W (at 240 VAC)

For 800W Power Supply: 800W (at 100 VAC), 800W (at 240 VAC),

800W (at 240 VAC) input for China only

For 500W Power Supply: 500W (at 100 VAC), 500W (at 240 VAC).

500W (at 240 VAC) input for China only

Maximum Peak Power

For 1400W Power Supply: 1400W (at 100 to 127 VAC), 1400W (at 200

to 240 1VAC), 1400W (at 240 VAC) input for China only

For 800W Power Supply: 800W (at 100 to 127 VAC), 800W (at 200 to

240 1VAC), 800W (at 240 VAC) input for China only

For 500W Power Supply: 500W (at 100 to 127 VAC), 500W (at 200 to

240 VAC), 500W (at 240 VAC) input for China only

System Inlet **Temperature** Standard Operating

Support

10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C

per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained

sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. For approved hardware configurations, the supported system inlet range is extended to be: 5° to 40°C (41° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: www.hp.com/go/proliant/Ashrae For approved hardware configurations, the supported system inlet range is extended to be: 5° to 45°C (41° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware

configurations for this system are listed at the URL: www.hp.com/servers/ASHRAE

Extended Ambient Operating Support

Non-operating -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr

(36°F/hr).

Relative Humidity Operating Minimum to be the higher (more moisture) of -12°C (10.4°F) dew point

or 8% relative humidity. Maximum to be the lower (less moisture) of

24°C (75.2°F) dew point or 90% relative humidity.

5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb Non-operating

temperature, non-condensing.

Altitude Operating 3050 m (10,000 ft). This value may be limited by the type and number

of options installed. Maximum allowable altitude change rate is 457

m/min (1500 ft/min).





Technical Specifications

Non-operating 9144 m (30,000 ft). Maximum allowable altitude change rate is 457

m/min (1500 ft/min).

Acoustic Noise

Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).

Idle

L WAd 3.6 Bels (1P LFF Entry)

> 3.5 Bels (1P SFF Base) 3.6 Bels (2P SFF E-star Rack) 3.4 Bels (2P SFF E-star Tower)

L pAm 21 dBA (1P LFF Entry)

> 21 dBA (1P SFF Base) 20 dBA (2P SFF E-star Rack) 19 dBA (2P SFF E-star Tower)

Operating

L WAd 3.7 Bels (1P LFF Entry)

> 3.6 Bels (1P SFF Base) 4.5 Bels (2P SFF E-star Rack) 4.5 Bels (2P SFF E-star Rack)

L pAm 21 dBA (1P LFF Entry)

> 22 dBA (1P SFF Entry) 28 dBA (2P SFF E-star Rack) 28 dBA (2P SFF E-star Tower)

NOTE: Configurations tested for 1P LFF Entry models included two (2) 500GB LFF SATA

Midline HDD and Windows 2012 Enterprise 64-bit.

NOTE: Configurations tested for 1P and 2P SFF models included two (2) 500GB SFF SATA

Midline HDD and Windows 2012 Enterprise 64-bit.

NOTE: The Listed sound levels apply to standard shipping configurations. Additional options

may result in increased sound levels.

Emissions Classification FCC Rating

Normative Standards CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438;

GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC

60950-1

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

HP Dynamic Smart

Array B140i **Number of PCI links** Four Controller

> **PCI link rate** 4 Gb/s Storage protocol SATA support

SAS/SATA peak data tranfer rate

6 Gb/s

Number of SAS/SATA links

10 links

SAS/SATA connectivity

2x4 connectors; 2x1 connectors

Expander support

Drives supported

(max)

Up to 10 Internal Drives

RAID support 0, 1, 10, 5 SATA Software HP SSA, SMH, SIM management





Technical Specifications

Warranty **HP Secure Encryption license** Server warranty Not Supported

HP SmartCache License

Not Supported

HP Smart Storage Administrator

Supported

HP Ethernet 1Gb 4- Network Interface 10Base-T/100Base-TX/1000Base-TX

port 331i Adapter

IEEE 802.3 10Base-T

Compatibility IEEE 802.3ab 1000Base-T

IEEE 802.3u 100Base-TX

Ports

Data Transfer Method

PCI Express, two lanes (x2)

Controller BCM5719

10Base-T (Half-

Duplex) 10 Mb/s per port, 40 Mb/s combined

10Base-T (Full-

Duplex)

20 Mb/s per port, 80 Mb/s combined

100Base-TX (Half-**Network Transfer**

Rate

Duplex)

100Base-TX (Full-

Duplex)

200 Mb/s per port, 800 Mb/s combined

1000Mb/s per port, 4000 Mb/s combined

2000Mb/s per port, 8000 Mb/s combined

100 Mb/s per port, 400 Mb/s combined

100Base-TX (Half-

Duplex)

100Base-TX (Full-

Duplex)

10 Base-T

RJ-45

Cable Support

Connector

Categories 3, 4 or 5 UTP; up to 328 ft (100 m)

10/100/1000 Base-TX Category 5 or higher UTP; up to 328 ft (100 m)

Environment-friendly End-of-life Products and Approach Management and Recycling

Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to:

http://www.hp.com/go/green. To recycle your product, please go to:

http://www.hp.com/go/green or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at:

http://www.hp.com/go/green. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.





Summary of Changes

Date	Version History	Action	Description of Change
9/19/2014	From Version 1 to 2	Changed	Changes made throughout the entire QuickSpec.



hp.com/gref/ml350gen^o

© Copyright 2014 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

