


ADD-PCIE-2SFP+

Dual Port Open SFP+ 10GBASE-LR, SR

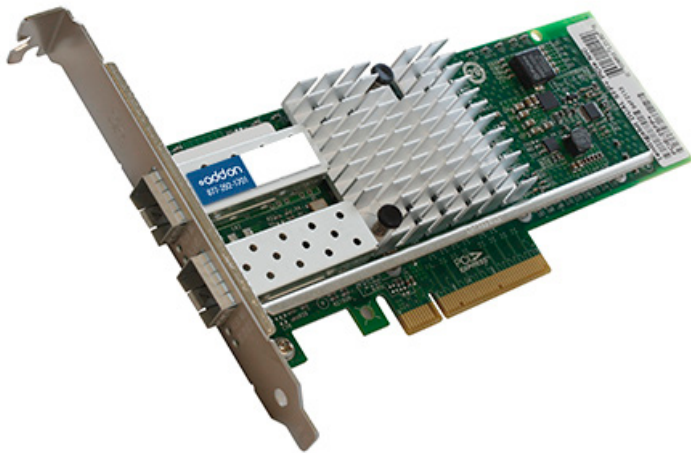

Features

- 2 SFP+ open port slot
- LEDS indicators for link / Activity Mode
- Supports 10 Gigabit Base-LR, SR
- Deep packet buffer per channel lowers CPU utilization
- Controllers offload TCP/UDP/IP checksum calculations
- Small Form Factor Pluggable (SFP+) Cage for SFP+ LC connectors
- Low-Profile Adapter
- Compliant with PCI Express Base Specification 2.0 Draft (5GT/s)
- Supports PCI E X8 bus
- IPSEC/LinkSec Security Features

Specifications

Products Type	Server Network Card
Bus Interface	PCI-E X8
Operating Distance	Single-Mode: 10km at 9 μ m Multimode fiber: 550m at 50 μ m 550m at 62.5 μ m
Network interface type	SFP+ Slot*2 (10GBASE-SR, 10GBASE-LR), LC fiber
Transmission speed (Gbps)	10G
Transmission medium type	Fiber
Network standard	IEEE802.3ae (10GBASE-SR, 10GBASE-LR)
PCI Connector	Gold Finger: X8
Compatible operating system	Windows XP Linux FreeBSD VMware
Working Temperature	0°C - 50°C
StorageTemperature	-20°C - 65°C