

# S601, S602, S602M Installing Batteries / Volume Adjustment



INSERT  
BATTERIES  
HERE



## Installing Batteries – S602 and S602M

1. Open the back cover with the silver latch
2. Insert 8 “C”-cell alkaline batteries in the clear plastic battery holder.
3. Place battery holder in battery slot
4. Close cover and turn megaphone “ON” to test siren, whistle and talk volume. Keep the switch in the “OFF/Talk” mode **WARNING:** the Siren or Whistle will sound loud immediately when the switch is on siren or whistle.

INSERT  
BATTERIES  
HERE



## Installing Batteries – S601

1. Open the back cover with the silver latch
2. Insert 8 “AA”-cell alkaline batteries in the black plastic battery carriage following diagram on megaphone.
3. Place battery carriage in battery slot
4. Close cover and turn megaphone “ON” to test siren, whistle and talk volume. Keep the switch in the “OFF/Talk” mode **WARNING:** the Siren or Whistle will sound loud immediately when the switch is on siren or whistle.

---

**If the sound is too loud or screeching you need to adjust the INTERNAL VOLUME CONTROL**


---

## Internal Volume Control - all models

1. Open the back cover with the silver latch
2. Where the letters “ADJ” are there is a hole. Insert a small Phillips screwdriver in the opening until you make contact with the adjusting mechanism. Turn clockwise to increase volume and turn it counter-clockwise to decrease volume.

INSERT  
BATTERIES  
HERE

INTERNAL  
VOLUME  
CONTROL

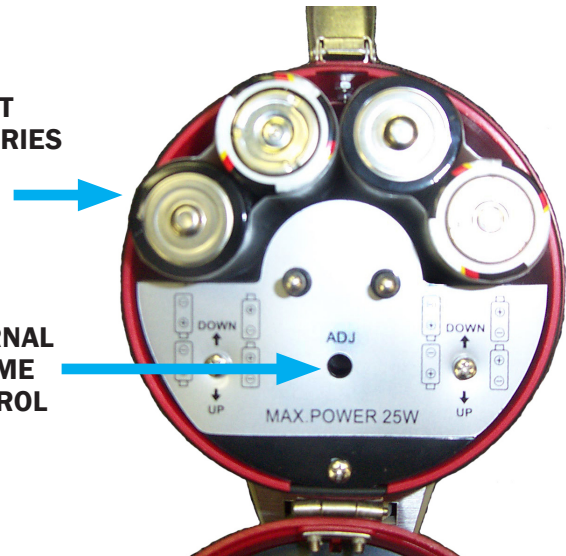

**If you need assistance, please call our toll free number and a representative will be happy to help you with this adjustment. 1-800-267-5486**