

Antec

TP-550C TruePower Classic



Power Supply

Antec's TruePower Classic series sets new standards for power supplies. TruePower Classic is one of the first series to comply with the toughest energy standard available, ErP Lot 6: 2013. By using a PSU that is 80 PLUS® GOLD certified, operating up to 92% efficient, you can reduce your electricity bill by up to 20% when compared to many other power supplies. Backed by a 5 year warranty and lifetime global 24/7 support, the TP-550C is the guaranteed gold standard for power.

550

W A T T

ATX12V V2.4

CONTINUOUS POWER

92%

MAX EFFICIENCY

20%

MAX ENERGY SAVINGS

120mm Fan

SPECIFICATIONS:

- **550W Continuous Power** - Guaranteed 550W of Continuous Power from Antec
- **80 PLUS® GOLD certified** - Up to 92% efficient, to reduce your electricity bill
- **Save Energy and Money** - Reduce your electricity bill by up to 20%
- **AQ5** - Antec Quality 5-year warranty and lifetime global 24/7 support
- **120 mm DBB Silence** - Whisper-quiet high-quality double ball bearing fan with long lifetime
- **Thermal Manager** - An advanced low voltage fan control for optimal heat & noise management
- **High Current Rails** - 2 High Current +12V rails with high load capabilities ensure maximum CPU & GPU compatibility
- **98% +12V** - Output for maximum CPU & GPU support
- **Multi PCI-E** - 2 PCI-E connectors for multiple GPU support
- **CircuitShield™** - Full suite of industrial grade protections: Over Current Protection (OCP), Over Voltage Protection (OVP), Under Voltage Protection (UVP), Short Circuit Protection (SCP), Over Power Protection (OPP), Over Temperature Protection (OTP), Surge & Inrush Protection (SIP) & No Load Operation (NLO)
- **Japanese Heavy-Duty Caps** - High-performance Japanese capacitors ensure tightest DC stability and regulation
- **ErP Lot 6: 2013** - Compliant to the toughest energy standard available
- **PhaseWave™ Design** - A server-class LLC design with a synchronous rectification based on a DC-DC topology
- **ATX12V 2.4** - Engineered according to the newest PSU guideline and compatible with the latest CPU generation

INPUT:

100VAC - 240VAC ~ ±10%
47Hz - 63Hz, 8A - 4A


OUTPUT:

	+3.3V	+5V	+12V ₁	+12V ₂	-12V	+5Vsb
MIN	0A	0A	0.1A	0A	0A	0A
MAX	20A	20A	30A	30A	0.3A	2.5A
TOTAL	100W		540W		3.6W	12.5W
	550W					

ENVIRONMENT:

Operating Temperature	0°C - 40°C
Safety Approvals	UL, cUL, CB, CE, FCC, TÜV, CCC, C-Tick, BSMI, Gost-R, SABS
Net Weight	4.6 lbs / 2.1 kg
Size	3.4" (H) x 5.9" (W) x 5.5" (D) 86 mm (H) x 150 mm (W) x 140 mm (D)

CONNECTORS:

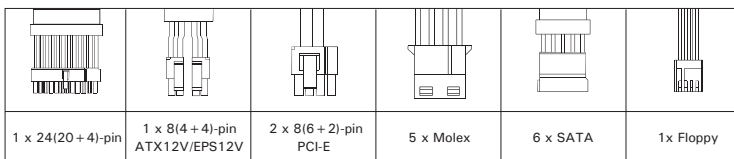

UPC#

0761345235563	0761345112017 IC
0761345112024 AU	0761345112048 JP
0761345112031 CN	0761345112055 TW
0761345077026 EC	0761345113410 ZA
0761345077033 GB	

www.antec.com/support
 1-800-22ANTEC (US)
 +31-(0)-10-462-2060 (EU)
 +886 (0)800-060-696
nasupport@antec.com
eusupport@antec.com
apsupport@antec.com

facebook.com/AntecInc
 Visit us on Facebook for contests, information & support



v1.0