

Professional Rack Mount Series

PURE SINE WAVE



Optional
Stand-up or
Rack-mount Design




PRODUCT FEATURES:

- Pure Sine Wave output
- Multiple outputs for multiple servers
- Multiple communication interfaces
- Automatic voltage regulator (AVR)
- Free Power Management software included
- User-replaceable batteries
- Programmable brownout and over voltage protection
- Microprocessor based full digital control
- EMI, RFI, Surge and lightning spike protection
- Phone / Fax / Modem and DSL / Network protection
- Scheduled shutdown and restart
- Auto-restart / auto-charge
- USB interface (included)
- SNMP / HTTP card (optional)

PowerPanel Plus™ Management Software



High-performance Power Protection with Perfect Pure Sine Wave Output!

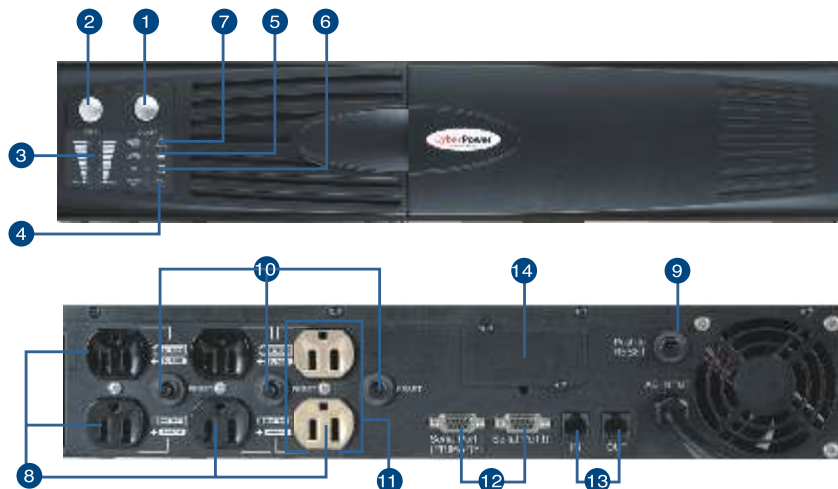

- 1 Power On/Off Switch
- 2 Self-Test / Silent Key
- 3 Battery / Load Level Indicators
- 4 Power On Indicator
- 5 Using Battery Indicator
- 6 AVR Indicator
- 7 Wiring Fault indicator
- 8 Battery Backup and Surge Protected Outlets
- 9 Re-settable Input Circuit Breaker
- 10 Re-settable Output Circuit Breaker
- 11 Individual Backup Power for Critical Load
- 12 Data Ports Support (2) Servers or Computers
- 13 Phone / Fax / Modem and DSL / Network Protection
- 14 SNMP/HTTP Network Interface

TECHNICAL SPECIFICATIONS

Model	PR1500	PR2200	PR3000
Capacity (VA/Watts)	1500VA / 1000W	2200VA / 1500W	3000VA / 2000W
Input			
Voltage Range	85Vac - 150Vac		
Frequency Range	47 - 63 Hz		
Output			
On Battery Output Voltage	Pure Sine Wave at 120Vac +/- 5%		
On Battery Output Frequency	60 Hz +/- 1%		
Transfer Time (Typical)	4ms		
Overload Protection	On Utility: Circuit Breaker, On Battery: Internal Current Limiting,		
Surge Protection and Filtering			
Lightning / Surge Protection	Yes		
Network / Phone / FAX / Modem Protection	RJ11/RJ45 (One In/One Out)		
Physical			
Total Numbers of UPS Receptacles	6		4-15amp, 2-20amp, 1-30amp
Dimensions (inches)	2U Rack 17.1x15.3x3.5		4U Rack - 17.1x15.3x3.5x2
Weight (lbs)	58.1	70.6	122.1
Battery			
Sealed Maintenance Free Lead Acid Battery	7AHx4	9AHx4	7AHx8
User Replaceable	Yes		
Typical Recharge Time	8 Hours		
Status Indication			
Indicators	Power On, Using Battery, AVR, Load Level, Battery Level		
Audible Alarms	On Battery, Low Battery, Overload		
Communication			
PowerPanel Plus™ Software	Windows 95/98/ME/NT/2000/XP, Server 2003, Mac OSX, Linux		
Management			
Self-Test	Manual Self-Test		
Auto-Charge	Yes		
Auto-Restart	Yes		
USB Cable	Yes		
SNMP/HTTP Network Card	Optional		
Run-time			
100% / 50% Load	5 / 14 min	4.5 / 12 min	4.5 / 12 min

For more information, Call: 877.297.6937



www.cyberpowersystems.com