4-PORT PS/2 KVM SWITCH

Control up to 4 PCs[1] using a single monitor, PS/2 keyboard, & PS/2 mouse	Switch between computers with a push of a button	Two 6ft standard KVM cables included

MINIMIZE DESKTOP CLUTTER

The D-Link® 4-Port PS/2 KVM Switch (DKVM-4K) is a cost-effective solution for controlling up to 4 computers[1] using a single monitor, PS/2 keyboard, and PS/2 mouse. With a sleek, compact design, the DKVM-4K minimizes desktop clutter by eliminating the need for multiple monitors and PS/2 devices.

CONVENIENT FEATURES

The DKVM-4K is convenient and simple to use with features such as at-a-glance LED indicators for computer status, port select push buttons and hot key support for easy switching between computers, autoscan mode for automatically detecting computers connected to the switch, and support for up to 2048 x 1536 video resolution. The DKVM-4K is also Plug-and-Play, allowing you to add or disconnect computers by simply unplugging the cables without having to power down.

The DKVM-4K comes with two 6-ft. standard KVM cables, requires no drivers, and is compatible with all Windows® Operating Systems. Versatile, portable, and convenient, the D-Link 4-Port PS/2 KVM Switch (DKVM-4K) can be easily integrated into your multiple computer workspace at home or in the office.

DKVM-4K

WHAT THIS PRODUCT DOES

The D-Link® 4-Port PS/2 KVM Switch (DKVM-4K) allows you to control up to four computers[1] using just one monitor, PS/2 keyboard, and PS/2 mouse. Conveniently switch between connected computers with a push of a button or use the hot key shortcuts on your keyboard for more advanced switching options. Minimize desktop clutter and simplify your workspace with the compact, time-saving 4-Port PS/2 KVM Switch.

ADDITIONAL FEATURES

The D-Link DKVM-4K requires no drivers and is compatible with all Windows® Operating Systems. It automatically scans and detects attached PCs and recalls Caps/Numbers/Scroll Lock key status for each computer for added convenience. In addition, the DKVM-4K supports up to 2048 x 1536 video resolution and includes two 6ft standard KVM cables.

YOUR DEVICE SETUP

TECHNICAL SPECIFICATIONS

COMPUTER CONTROL
+ Up to 4[1]

LEDs
+ Four (4) Port Status LEDs

CONSOLE CONNECTORS
+ Keyboard:
  - 6-pin Mini-DIN Female PS/2
+ Monitor:
  - 15-pin HDDB Female VGA
  - SVGA
  - XGA
  - MultiSync
+ Mouse:
  - 6-pin Mini-DIN Female PS/2

MONITOR RESOLUTION SUPPORT:
+ Up to 2048 X 1536

SWITCHING CONTROLS
+ Port Select Push Button
+ Keyboard Hot Keys

SWITCHING NOTIFICATION
+ Audio Beep

AUTO-SCAN MODE
+ Yes

MINIMUM SYSTEM REQUIREMENTS
+ Computer with:
  - PS/2 Input Ports
  - VGA Output Port
+ PS/2 Keyboard
+ PS/2 Mouse
+ VGA Monitor

AUTO-SCANNING INTERVAL
+ 10 Seconds

POWER
+ Bus Powered (No External Power Adapter Required)

DIMENSIONS
+ Item (WxDxH): 4.1" x 7.0" x 1.2"
+ Packaging (WxDxH): 8.2" x 10.8" x 2.6"

WEIGHT
+ Item: 0.6 lbs.
+ Packaging: 2.8 lbs.

TEMPERATURE
+ Operating: 32°F to 122°F
+ Storage: -4°F to 140°F

HUMIDITY
+ Operating: 0% ~ 80% Non-condensing
+ Storage: 0% ~ 80% Non-condensing

CERTIFICATIONS
+ FCC Class B
+ CE

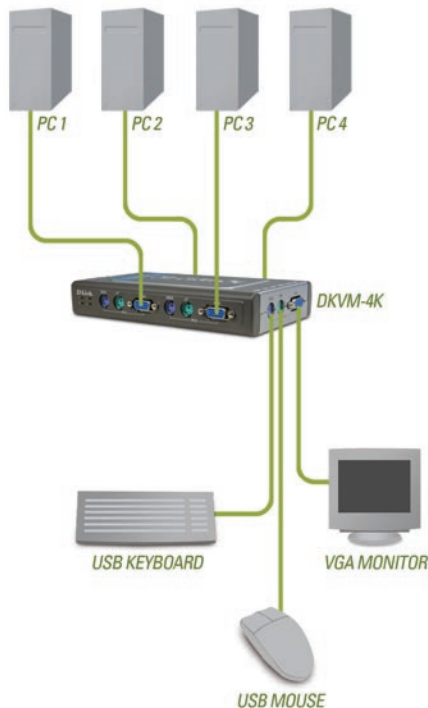**WARRANTY**
+ 1-Year Limited[2]

PACKAGE CONTENTS
+ 4-Port PS/2 KVM Switch (DKVM-4K)
+ Two 6ft Standard KVM Cables (DKVM-CB)
  (Additional KVM Cables Sold Separately)
+ Quick Installation Guide[3]

MULTIMEDIA