


Overview

**HP recommends
Windows Vista® Business**

Microtower

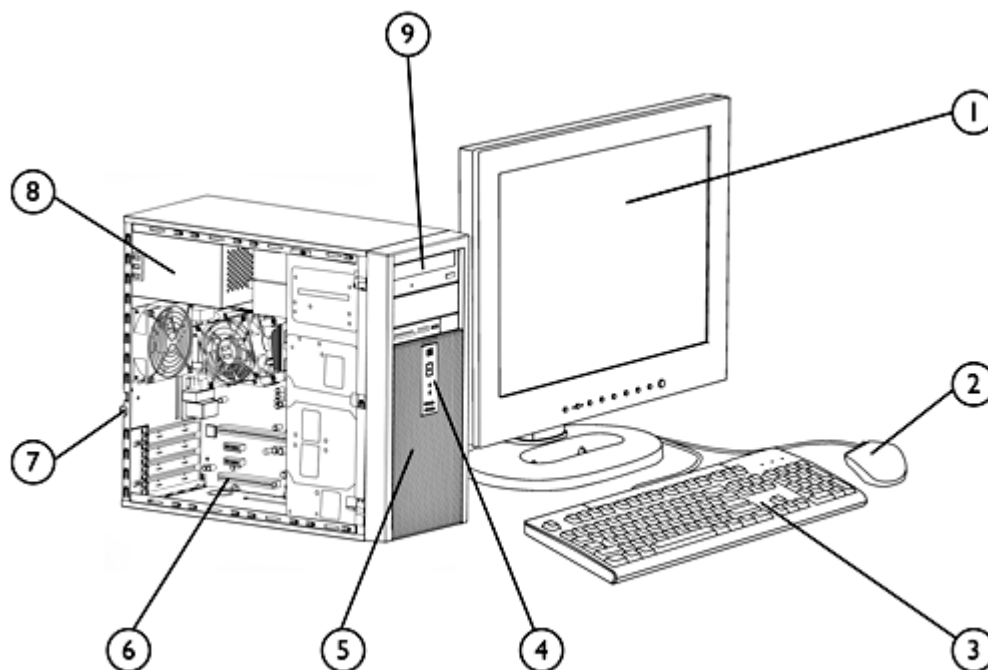

- 1. Monitor (sold separately)
- 2. PS/2 Scroll Mouse
- 3. HP Standard Keyboard
- 4. (2) USB 2.0 ports, audio ports
- 5. (2) internal 3.5" drive bays
- 6. (1) full-height PCI 2.3 slot, (2) PCIe x1 slots, (1) PCIe x16 slot
- 7. (4) USB 2.0 ports, (1) serial port, (1) optional second serial port, (1) parallel port, (2) PS/2, (1) RJ-45, (1) VGA, (1) audio in – (1) audio out – (1) MIC
- 8. 250-watt max power supply
- 9. (2) external 5.25" drive bays for optional optical drives; (1) external 3.5" drive bay for optional media reader or diskette drive

Overview

At A Glance

- Intel® Core™ 2 Duo processors, Intel Pentium® D processors, Intel Pentium 4 processors, or Intel Celeron® D processors
- Choice of operating systems:
 - Genuine Windows Vista Business 32
 - Genuine Windows Vista Home Basic 32
 - Genuine Windows XP Professional
 - Genuine Windows XP Home
- Intel 946GZ Express Chipset
- Intel I/O Controller Hub 7 (ICH7)
- Intel Graphics Media Accelerator 3000
- PCI Express I/O bus
- Serial ATA controller
- Serial ATA optical and hard drives
- Intel PRO/100 VE Network Connection
- Choice of hard drives and optical drives
- DDR2 SDRAM system memory
- Protected by HP Services. Certain restrictions and exclusions apply.

Configurable Components - Select Models

Model Key and Example

NOTE: This diagram is an example that illustrates how to read the model number. It is not intended to give every available configuration choice specified in the body of this document and may include references to modules that are out of date and no longer available.

dc7700pC8/E6300/250h+nyr/512H/S11tQk

FAMILY LINE

- dx2200=HP Compaq dx2200
- dx2250=HP Compaq dx2250
- dx2255=HP Compaq dx2255
- dx2300=HP Compaq dx2300
- dx2308=HP Compaq dx2308
- dx2700=HP Compaq dx2700
- dx2708=HP Compaq dx2708
- dx7300=HP Compaq dx7300
- dx7308=HP Compaq dx7308
- dx7380=HP Compaq dx7380
- dc7700=HP Compaq dc7700
- dc5700=HP Compaq dc5700
- dc5750=HP Compaq dc5750

MS SW DESIGNATOR

- s=MS Office Software
- p=with Vpro (dc7700)
- r=Office Ready with Vpro

FORM FACTOR

- S=SFF
- C=CMT
- M=MT
- U=USDT
- T=ST

ENHANCED POWER EFFICIENCY

- Blank=not applicable
- 8=80PLUS power supply
- 9=E STAR 4.0 compliant config

HARD DRIVE

- 40=40G HD
- 80=80G HD
- 160=160G HD
- 250=250G HD

HDD SPEED

- h=7200 SATA
- K=10K SATA

REMOVABLE STORAGE

- c=CD-ROM
- d=DVD-ROM
- q=DVD+RW
- r=CDRW
- w=DVD/CDRW+RW
- y=Disk-on-Key II
- f=Floppy
- n=no floppy
- m=Multi-Card Reader
- s=Removable HDD

MEMORY SIZE

- 256=256MB
- 512=512MB
- 1.0=1GB
- 1.5=1.5GB
- 2.0=2.0GB
- 4.0=4.0GB

MEMORY SPEED

- H=PC2 3200 DDR2 400MHz single channel
- I=PC2 3200 DDR2 400MHz dual channel
- J=PC2 4200 DDR2 533MHz single
- K=PC2 4200 DDR2 533MHz dual
- L=PC2 5300 DDR2 667MHz single
- R=PC2 5300 DDR2 667MHz dual
- T=PC2 6400 DDR2 800MHz single
- U=PC2 6400 DDR2 800MHz dual

VARIABLE WARRANTY

- Blank=not applicable
- a=1-0-0
- d=1-1-0
- f=1-1-1
- g=2-0-0
- h=2-2-0
- i=3-1-1
- j=3-3-0
- k=3-3-3
- l=4-4-4
- m=5-5-5
- n=90-0-0

OTHER

- Blank=integrated NIC
- Q=2nd Serial Port
- P=Solenoid Lock
- H=Special Home Edition Sticker
- A=Wireless NIC
- M=Modem

SOFTWARE APPLICATIONS

- c=Office Pro
- t=Office Personal
- e=Office SBE
- b=Office Basic
- u=MS Works 7.0 (NA only)
- w=MS Word (EMEA only)

OPERATING SYSTEM

- 2=XP Pro x64
- 3=XP Home
- 4=XP Pro
- 5=XP Home S Chin
- 6=XP Pro S Chin
- 7=Vista Business 32
- 8=FreeDOS
- 9=WS Blade Embedded OS
- 10=Vista Business 64
- 11=Vista Basic
- 12=Vista Business 32 S China
- 13=Vista Business 64 S China
- 14=Vista Basic S China

GRAPHIC

- V=AD02 SDVO single DVI-D adapter
- Q=ATI X300SE 128MB single head PCIe DVI w/hv-out
- B=ATI X1300 256MB single head PCIe DVI w/hv-out
- C=ATI X1300 256MB dual head PCIe DMS59 w/hv-out
- D=ATI X1600 256MB dual head PCIe DVI w/hv-out
- E=NVIDIA Quadro NVS55 64MB single head PCI VGA w/hv-out
- M=NVIDIA Quadro 280NVS 64MB dual head PCIe VGA
- N=NVIDIA Quadro 280NVS 64MB dual head PCI VGA
- S=NVIDIA Quadro 285NVS 128MB dual head PCIe VGA

Standard Features and Configurable Components

Processor and Speed

One of the following

Intel Celeron D Processors

Intel Celeron D 331 Processor (2.66-GHz, 256-KB L2 cache, 533-MHz FSB)
Intel Celeron D 336 Processor (2.80-GHz, 256-KB L2 cache, 533-MHz FSB)
Intel Celeron D 347 Processor (3.06-GHz, 512-KB L2 cache, 533-MHz FSB)
Intel Celeron D 352 Processor (3.20-GHz, 512-KB L2 cache, 533-MHz FSB)
Intel Celeron D 356 Processor (3.33-GHz, 512-KB L2 cache, 533-MHz FSB)
Intel Celeron D 360 Processor (3.46-GHz, 512-KB L2 cache, 533-MHz FSB)
Intel Celeron D 420 Processor (1.60-GHz, 512-KB L2 cache, 800-MHz FSB)
Intel Celeron D 430 Processor (1.80-GHz, 512-KB L2 cache, 800-MHz FSB)
Intel Celeron D 440 Processor (2.00-GHz, 512-KB L2 cache, 800-MHz FSB)

Intel Pentium 4 Processors

Intel Pentium 4 631 Processor (3.00-GHz, 2-MB L2 cache, 800-MHz FSB)
Intel Pentium 4 641 Processor (3.20-GHz, 2-MB L2 cache, 800-MHz FSB)
Intel Pentium 4 651 Processor (3.40-GHz, 2-MB L2 cache, 800-MHz FSB)

Intel Pentium D Processors

Intel Pentium D 915 Processor (2.80-GHz, 4-MB L2 cache, 800-MHz FSB)
Intel Pentium D 925 Processor (3.00-GHz, 4-MB L2 cache, 800-MHz FSB)
Intel Pentium D 935 Processor (3.20-GHz, 4-MB L2 cache, 800-MHz FSB)
Intel Pentium D 945 Processor (3.40-GHz, 4-MB L2 cache, 800-MHz FSB)

Intel Pentium dual-core Processors

Intel Pentium Dual-Core E2140 Processor (1.60-GHz, 1-MB L2 cache, 800-MHz FSB)
Intel Pentium Dual-Core E2160 Processor (1.80-GHz, 1-MB L2 cache, 800-MHz FSB)
Intel Pentium Dual-Core E2180 Processor (2.00-GHz, 1-MB L2 cache, 800-MHz FSB)

Intel Core 2 Duo Processors

Intel Core 2 Duo E4300 Processor (1.80-GHz, 2-MB L2 cache, 800-MHz FSB)
Intel Core 2 Duo E4500 Processor (2.20-GHz, 2-MB L2 cache, 800-MHz FSB)
Intel Core 2 Duo E6300 Processor (1.86-GHz, 2-MB L2 cache, 1066-MHz FSB)
Intel Core 2 Duo E6320 Processor (1.86-GHz, 4-MB L2 cache, 1066-MHz FSB)
Intel Core 2 Duo E6400 Processor (2.13-GHz, 2-MB L2 cache, 1066-MHz FSB)
Intel Core 2 Duo E6420 Processor (2.13-GHz, 4-MB L2 cache, 1066-MHz FSB)
Intel Core 2 Duo E6600 Processor (2.40-GHz, 4-MB L2 cache, 1066-MHz FSB)
Intel Core 2 Duo E6700 Processor (2.66-GHz, 4-MB L2 cache, 1066-MHz FSB)

NOTE: Intel processor numbers are not a measure of performance. Processor numbers differentiate features within each processor family, not across different processor families.

Standard Features and Configurable Components

Operating Systems and Application Software

(availability varies by
region)

Genuine Windows Vista Business 32*
Genuine Windows Vista Home Basic 32*
Genuine Windows XP Professional SP2
Genuine Windows XP Home SP2
SUSE Linux Enterprise Desktop 10 (certified)

Microsoft Office 2007 Basic
Microsoft Office 2007 Small Business
Microsoft Office 2007 Professional
Microsoft Works 8.5

HP Backup and Recovery Manager
Roxio Easy Media Creator 9.1**
Intervideo WinDVD Player**
Symantec AntiVirus 10
Sun Java Runtime Environment
Google Toolbar
HP Backup and Recovery Manager Software

* Certain Windows Vista product features require advanced or additional hardware. See <http://www.microsoft.com/windowsvista/getready/hardwarereqs.mspx> and <http://www.microsoft.com/windowsvista/getready/capable.mspx> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit <http://www.windowsvista.com/upgradeadvisor>.

** Supporting software available with certain optical drive configurations

Hard Drives

80-GB Serial ATA 3.0-Gb/s Hard Drive (7200 rpm)
160-GB Serial ATA 3.0-Gb/s Hard Drive (7200 rpm)
250-GB Serial ATA 3.0-Gb/s Hard Drive (7200 rpm)

System Memory

256-MB DDR2 Synch DRAM PC2-5300 (667-MHz) Non-ECC (1 x 256-MB)
NOTE: 256-MB configurations not supported by Windows Vista
512-MB DDR2 Synch DRAM PC2-5300 (667-MHz) Non-ECC (1 x 512-MB)
1-GB DDR2 Synch DRAM PC2-5300 (667-MHz) Non-ECC (2 x 512-MB)
1-GB DDR2 Synch DRAM PC2-5300 (667-MHz) Non-ECC (1 x 1-GB)
2-GB DDR2 Synch DRAM PC2-5300 (667-MHz) Non-ECC (2 x 1-GB)

Standard Features and Configurable Components

Storage –

One or more of the following (see Storage section below)

Diskette Drive

1.44-MB Diskette Drive

Media Reader

HP 16-in-1 Media Reader and additional USB 2.0 port

Optical Drives (Serial ATA)

SATA CD-ROM Drive (not supported by Windows Vista)

SATA DVD-ROM Drive

SATA CD-RW/DVD-ROM Combo Drive

SATA DVD+/-RW (DL/DF) LightScribe Drive

Input Devices**Keyboard – One of the following**

HP PS/2 Standard Keyboard

HP USB Standard Keyboard

Mouse – One of the following

PS/2 2-Button Scroll Mouse

PS/2 2-Button Optical Scroll Mouse

USB 2-Button Optical Scroll Mouse

Audio

Realtek ALC888 High Definition audio codec

3D audio compliant with AC'97 Rev. 2.3 and HD Audio compatible

Internal PC speaker

Communication

Intel PRO/1000 PT Gigabit PCIe Adapter (full height)

Intel PRO/100 VE Network Connection

Agere 56K PCI Modem

Graphics

Intel Graphics Media Accelerator 3000

ATI Radeon X1300 (256MB SH) PCIe Graphics

ATI Radeon X1300 Pro (256MB DH) PCIe Graphics

Miscellaneous

HP FireWire / IEEE 1394 PCI Card (full height)

System Details

Base Unit

- Micro ATX microtower chassis, including power supply and front bezel
- Five (5) drive bays and four expansion slots
- Microsoft operating system CD
- Active type heatsink
- 92 x 92 x 25 mm chassis fan
- System board with Intel 946GZ Express chipset, Intel I/O Controller Hub 7 (ICH7), Intel PRO/100 VE Network Connection, Intel GMA 3000 graphics, and Realtek audio, 1 full-height PCI 2.3 slot, 2 PCI Express x1 slots, 1 PCI Express x16 slot, 2 DDR2 DIMM memory slots
- (4) Serial ATA data connectors
- Product documentation on CD
- Power cord

Slots	PCI	One (1) full-height PCI 2.3 slot on PCA Two (2) full-height PCI Express x1 slots on PCA One (1) full-height PCI Express x16 slot on PCA (for graphic cards)
	Memory Expansion	Two (2) DDR2 SDRAM DIMM slots (4 GB maximum memory support)

Bays	Internal	Two (2) 3.5"
	External	Two (2) 5.25"
		One (1) 3.5"

USB Support	EHCI high-speed USB 2.0 controller Two (2) front ports; Four (4) rear ports, Two (2) internal ports on motherboard
--------------------	---

Interfaces (Legacy)	One (1) parallel port One (1) serial port One (1) optional second serial port One (1) PS/2 keyboard port One (1) PS/2 mouse port One (1) analog VGA video port One (1) line in; one (1) line out; one (1) mic in One (1) RJ45 network port One (1) microphone (front); one (1) headphone (front)
----------------------------	--

Weight & Dimensions	Chassis Dimensions (H x W x D)	13.90 x 6.89 x 16.38 in (353 x 175 x 416 mm)
	Packaged Dimensions (L x W x H)	22.25 x 19.63 x 16.31 in (565.15 x 498.5 x 414.3 mm)
	System Weight	21.16 lb (9.6 kg)
	Shipping Weight	30.86 lb (14.0 kg)

System Details

Technology and Features	Memory Type	PC2-5300 DDR2 SDRAM (667-MHz) non-ECC Up to 2-GB system memory standard Up to 4-GB system memory supported
	Hard Drive Interfaces Supported	Serial ATA
<hr/>		
Chassis	Front Panel	Power button Power On LED HDD Activity LED
	Cooling Solutions Supported	Power Supply Fan (variable speed) Active heatsink (variable speed) Chassis fan (variable speed)
	Slots Supported	Four (4) full-height expansion slots
	Front I/O	Two (2) USB 2.0 ports
	Rear I/O	Standard Micro ATX I/O connectors, including four (4) USB 2.0 ports
	Drive Bays	Two (2) 5-1/4" external One (1) 3-1/2" external Two (2) 3-1/2" internal
	Internal Speaker	Standard
	Security	Padlock loop Kensington Lock Support
	Power Supply	250-watt ATX Power Supply – PFC/non-PFC with a 115v/230v line switch

Unit Environment and Operating Conditions

General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 4 in (10.2 cm) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

Temperature Range	Operating	50° to 95° F (10° to 35° C)
	Non-operating	-22° to 140° F (-30° to 60° C)
Relative Humidity	Operating	10% to 90% (non-condensing at ambient)
	Non-operating	5% to 95% (non-condensing at ambient)
Maximum Altitude (unpressurized)	Operating	10,000 ft (3048 m)
	Non-operating	30,000 ft (9000 m)

NOTE: Operating temperature is de-rated 1.0 deg C per 1000 ft (300 m) to 10,000 ft (3000 m) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

System Details

System Board	Processor	Socket T; LGA775 industry standard Micro ATX form factor Support single Intel Core 2 Duo, Pentium D, Pentium 4 or Celeron D
	PWM	Intersil 6312 3 phase
	Chipset	Intel 946GZ Express Intel I/O Controller Hub 7 (ICH7)
	Super I/O	W83627DHG
	Front Side Bus Frequency	533/800 MHz
	Memory	DDR2 SDRAM 2 x DIMM slots
	Clock Generator	CY505YC56DT
	Integrated Graphics	Intel Graphics Media Accelerator (GMA) 3000
	Audio	Realtek ALC888 HD Audio compatible codec with two channel audio 3D audio compliant with AC'97 rev. 2.3
	LOM	Intel PRO/100 VE Network Connection
	Serial	Four Serial ATA interfaces
	Expansion Slots	1 x PCI 2.3 slot 2 x PCI Express x1 slots 1 x PCI Express x16 slot
	BIOS	LPC EEPROM
	Industrial Standard	PCI 2.3 compliant USB 2.0
	Rear Side I/O Ports	1 x PS/2 keyboard port 1 x PS/2 mouse port 4 x USB 2.0 ports 1 x RJ-45 10/100 port 1 x serial port 1 x optional second serial port 1 x parallel port 1 x DB 15 pin analog VGA port 3 x audio ports
	On Board I/O Interfaces	1 x ATX power connector 1 x +12V power connector 1 x Floppy connector 1 x Front panel connector, Switch, LED (ON/Flash/OFF) 2 x Fan headers for CPU, chassis, with voltage/fan speed control 1 x header to support 2 USB 2.0 ports at front side 1 x header to support USB media reader 1 x serial header to support optional second serial port
	Board Size	Micro-ATX, PCB Size: 9.6 x 9.0 in (24.38 x 22.86 cm) 4-layer PCB with green color

System Details

Additional Features

Bootable without keyboard, mouse or monitor
Keyboard/mouse/USB wake up
Support S1, S3, S4 and S5
ACPI status
Hardware monitor capability
CPU fan speed control

Network Interface

Intel PRO/100 VE Network Connection

Hardware Highlights Features

PCI interfaces
10-Mbps and 100-Mbps operation

Intel PRO/1000 PT Gigabit PCIe Adapter

Hardware Highlights Features

PCI Express interface
10-Mbps, 100-Mbps and 1000-Mbps operation

Wireless

Wireless A+G PCI Card (full height bracket)

Power Supply

- ATX Power Supply – Passive PFC/non-PFC with a 115v/230v line switch
- Passive Power Factor Correction (PFC) – with line switch set to 230V – No PFC in 115V line switch position
- 90 to 140VAC, or 180 to 264VAC operating voltage range
- 100 to 127VAC, or 200 to 240VAC rated voltage range
- 50–60 Hz rated line frequency
- 47–63 Hz operating line frequency range
- 250 watt maximum rated power
- 80-mm power supply fan – variable speed for optimum acoustics

Power Conservation 'Energy Saver'

APM 1.2 support
Screen blanking
Hard drive 'Idle' mode
System Idle mode
~2 watt power consumption in ES mode – suspend to RAM (S3) (instantly available PC)
Processor/Cache memory power-down (S3)

System Details

System Environmental Specs

- Values are subject to change without notification and are for reference only.
- Performance of system, options, and ancillary equipment will vary depending on the system configuration.
- Levels presented do not account for non-HP/Compaq installed hardware.

Ambient Air Temperature	Operating	50° to 95°F (10° to 35°C) at sea level with an altitude de-rating of 1.0°C per every 1000 ft (300 m) above sea level to a maximum of 8000 ft (2500 m), no direct sustained sunlight. Maximum rate of change is 77°F/Hr (25°C/Hr). The upper limit may be limited by the type and number of options installed.
	Storage	-22° to 140°F (-30° to 60°C) – Maximum rate of change: 410°F/Hr (210°C/Hr).
Humidity	Operating	10% to 90% relative humidity (Rh), 86°F (30°C) maximum wet bulb temperature, non-condensing
	Storage	10% to 95% relative humidity (Rh), 101.66°F (38.7°C) maximum wet bulb temperature, non-condensing
Altitude	Operating	0 to 10,000 feet (0 to 3048 meters) – This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 1,000 ft/min (304.8 m/min).
	Non-Operating	0 to 30,000 feet (0 to 9,144 meters) – Maximum allowable altitude change rate is 1200 ft/min (365.76 m/min).
Shock	Listed are the levels of shock the product can withstand with NO damage being incurred. The values represent peak input acceleration during an 2~3 ms half-sine shock pulse, 11 ms trapezoidal shock pulse.	
	Non-Operating	35G's (Half-sine Shock) 35G's (Trapezoidal Shock)
Vibration	Listed are the levels of vibration the product can withstand with NO damage being incurred. The values represent a flat random vibration input acceleration profile across the given frequency range.	
	Operating	Random vibration at 5Hz@0.00025G ² /Hz, 10Hz@0.01G ² /Hz, 100Hz@0.01G ² /Hz, 300Hz@0.00001G ² /Hz 5Hz to 300Hz, (0.25G's nominal).
	Non-Operating	Random vibration at 0.008G ² /Hz, 10Hz to 500Hz, (2 Grms nominal).

System Details

Acoustic Noise	Listed are the declared A-WEIGHTED SOUND POWER LEVELS (LWAd) and declared average desktop seated operator position A-WEIGHTED SOUND PRESSURE LEVELS (LpAm) when the product is operating in a 73.4°F (23°C) ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).	
	IDLE (Fixed disk drive spinning)	LWAd = 4.3 Bels, Desktop Average LpAm = 32 dBA
	FIXED DISK (Random write)	LWAd = 4.8 Bels, Desktop Average LpAm = 37dBA
	CD-ROM (Sequential Reads)	LWAd = 5.0 Bels, Deskside Average LpAm = 39dBA

Service and Support

On-site Warranty¹: One-year (1-1-1) limited warranty delivers one year of on-site, next business-day² service for parts and labor and includes free telephone support³ 24 x 7. Global coverage² ensures that any product purchased in one country and transferred to another non-restricted country will remain fully covered under the original warranty and service offering.

¹ Terms and conditions may vary by country. Certain restrictions and exclusions apply.

² On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

³ Technical telephone support applies only to HP-configured Compaq and third-party HP-qualified hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

After-Market Options

Communications

NICs

Intel PRO/1000 PT PCIe Gigabit NIC Card EH352AA

Wireless LAN

HP Wireless A+G PCI Card EA118AA

Modems

Agere 2006 PCI High-Speed 56K International SoftModem EK694AA

Connectivity

Bundle Connectivity Starter Kit – Surge Protector/LAN cable/Printer cable RT174AA

Office 2007 Media-less License Kits (MLKs)

MS Office Basic Edition 2007 – Media-less License Kit RZ361A#ABA

MS Office Small Business Edition 2007 – Media-less License Kit RZ365A#ABA

MS Office Professional Edition 2007 – Media-less License Kit RZ363A#ABA

Hard Disk Drives

HP 250-GB SATA 3.0-Gb/s Hard Drive PY278AA

HP 160-GB SATA 3.0-Gb/s Hard Drive PY277AA

HP 80-GB SATA 3.0-Gb/s Hard Drive PY276AA

Removable Storage Devices

Diskette Drive

HP 1.44-MB Internal Diskette Drive AG295AA

HP 1.44-MB USB Diskette Drive – External DC141B

16-in-1 Media Reader EM718AA

Input Devices

Keyboards

HP PS/2 Standard Keyboard DT527A#ABA

HP USB Standard Keyboard DT528A#ABA

Mice

HP PS/2 2-Button Scroll Mouse DD440B

HP PS/2 2-Button Optical Scroll Mouse EY703AA

HP USB 2-Button Optical Scroll Mouse DC172B

HP USB 2-Button Laser Mouse GW405AA

Memory

HP 1-GB PC2-5300 (DDR2-667 MHz) DIMM PX976AA

HP 512-MB PC2-5300 (DDR2-667 MHz) DIMM PX975AA

HP 256-MB PC2-5300 (DDR2-667 MHz) DIMM PX974AA

After-Market Options

Audio	HP USB Powered Speakers	RD628AA
	Thin USB Powered Speakers	KK912AA (launching 4/14/08)
Graphics	ATI RADEON X1300 (256MB DH) PCIe Graphics Card	AH050AA
	ATI RADEON X1300 (256MB SH) PCIe Graphics Card	AG392AA
	HP DMS59 DVI Dual-head Connector Cable	DL139A
Optical Drives	HP SATA CD-RW/DVD-ROM Combo Drive	AH046AA
	HP SATA DVD-ROM Drive	AH047AA
	HP PATA DVD+/-RW SuperMulti LightScribe Drive	GF343AA
Security	HP Business PC Security Lock Kit	TBD
	Kensington Compaq Security Lock – Single	PC766A
	HP Smart Data Protection Service	BB731UT
Cables and Adapters	HP USB to Serial Adapter, 3ft	EM449AA
	HP DVI to DVI Cable	DC198A
	Local Area Network (LAN) cable	AH122AA
	HP Firewire (1394) Cable	AH123AA
	HP 7-outlet Surge Protector	AG290AA#ABA
	HP DMS59 DVI Dual-head Connector Cable (supports AH050AA)	DL139A
Chassis Enhancements	HP 5.25" Blank Bezel Kit (Carbonite 50/Bulk Pack)	DC177B
Miscellaneous Accessories	HP FireWire / IEEE 1394 PCI Card	PA997A

After-Market Options

Monitors	CRTs	3PO Offering
	Business LCD Monitors	
	HP L1506 15-inch LCD Monitor	PX848AA#ABA
	HP L1710 17-inch LCD Monitor	GS917AA#ABA
	HP L1750 17-inch LCD Monitor	GF904AA#ABA
	HP L1745 17-inch LCD Monitor	GE178AA#ABA
	HP L1910 19-inch LCD Monitor	GS918AA#ABA
	HP L1950 19-inch LCD Monitor	GG458AA#ABA
	HP LP1965 19-inch LCD Monitor	RA373AA#ABA
	HP LP2065 20-inch LCD Monitor	EF227A4#ABA
	Business Widescreen LCD Monitors	GX007AA#ABA
	HP L1908w 19-inch Widescreen LCD Monitor	GP536AA#ABA
	HP L2045w 20-inch Widescreen LCD Monitor	RD125AA#ABA
	HP L2208w 22-inch Widescreen LCD Monitor	GX007AA#ABA
	HP L2245w 22-inch Widescreen LCD Monitor	GX008AA#ABA
	HP LP2465 24-inch Widescreen LCD Monitor	EF224A4#ABA
	HP LP3065 30-inch Widescreen LCD Monitor	EZ320A4#ABA
	Business Widescreen LCD Monitor with Integrated Speakers	
	HP L1908wm 19-inch Widescreen LCD Monitor with Built in Integrated Speakers	KA214AA#ABA
	Business GSA Monitors	3PO Offering
	Business Touchscreen LCD Monitor	
	HP L5006tm 15-inch Touch Screen LCD Monitor	RB146AA#ABA
	Business LCD Monitor with Integrated Work Stand	
	HP L1908wi 19-inch Widescreen LCD Monitor plus Integrated Work Stand	GP537AA#ABA
	HP L1910i 19-inch LCD Monitor plus Integrated Work Stand	GS581AA#ABA
	Options	
	HP Flat Panel Speaker Bar	EE418AA
	HP Quick Release Kit	EM870AA
	HP Integrated Work Stand (stand alone)	GN783AA

Memory

DDR SYNCH DRAM NON-ECC MEMORY

The Intel 946GZ Express chipset supports non-ECC DDR2 memory up to PC2-5300 (667-MHz). Memory upgrades are accomplished by adding single or multiple DIMMs of the same or varied sizes. This chart does not represent all possible memory configurations.

CAUTION: You must shut down the computer **and disconnect the power cord** before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.

HP recommends dual-channel symmetric configurations for maximum performance.

For best performance, add the same amount of total memory to each channel and do not mix speeds. For dual-channel symmetric performance, the total amount of memory in each channel must be equal. If speeds are mixed, speed will default to the slowest DIMM.

STANDARD MEMORY


256-MB, 512-MB, 1-GB, or 2-GB DDR2 SYNCH DRAM

OPTIONAL MEMORY UPGRADES

Supports up to 4-GB of DDR2 SYNCH DRAM. Not all memory configurations possible are represented below.

DIMM Size	Slot 1	Slot 2
256-MB	256-MB	
512-MB	512-MB	
512-MB (dual-channel symmetric)	256-MB	256-MB
1-GB	1-GB	
1-GB (dual-channel symmetric)	512-MB	512-MB
2-GB (dual-channel symmetric)	1-GB	1-GB
4-GB (dual-channel symmetric)	2-GB	2-GB

Storage

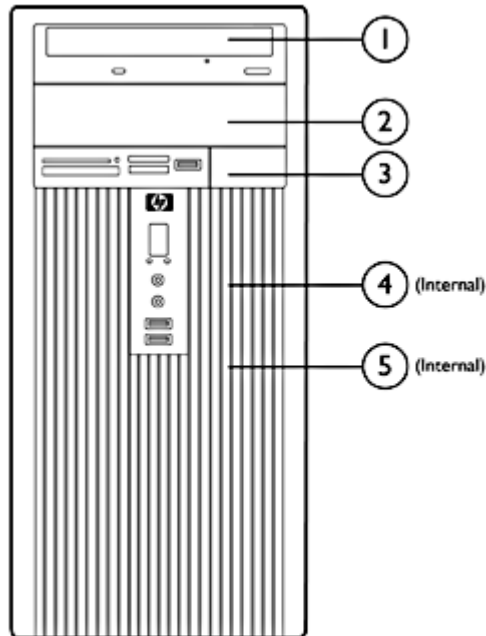

HP Compaq dx2300 Microtower Business PC

	Maximum Quantity Supported	Position Supported	Controller
Drive Support			
Diskette Drives	1	3	SIO
Media Reader	1	3	Internal USB 2.0 port
CD-ROM Drives	2	1, 2	SATA
DVD-ROM Drives	2	1, 2	SATA
CD-RW/Combo Drives	2	1, 2	SATA
DVD+/-RW Drives	2	1, 2	SATA
3.5" Serial ATA Hard Drives	2	4, 5	SATA

Technical Specifications - Audio

Integrated Realtek ALC888 Audio	Type	Integrated
	HD Audio compatible codec	Yes
	Sampling	Supports 48/96 KHz
	Audio Jacks	Mic-In
		Line-In
		Line-Out / Headphone Out
Power Support		Digital: 3.3V
		Analog: 5V
Other	Meets performance requirements for audio on PC99/2001 systems High-performance DACs with 97dB SNR(A-Weighting) ADCs with 90dB NR(A-Weighting)	

Technical Specifications - Communications

Intel PRO/1000 PT PCIe Gigabit NIC	Connector	RJ-45
	Controller	Intel 82572EI Gigabit Ethernet Controller
	Memory	Integrated Dual 48K configurable transmit receive FIFO Buffers
	Data rates supported	10/100/1000 Mbps
	Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	Bus architecture	PCI Express 1.0a
	Data transfer mode	Bus-master DMA
	Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
	Power requirement	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T
	Boot ROM support	Yes
	Network transfer rate	10BASE-T (half-duplex) 10 Mbps
		10BASE-T (full-duplex) 20 Mbps
		100BASE-TX (half-duplex) 100 Mbps
		100BASE-TX (full-duplex) 200 Mbps
		1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI Bus)
Environmental	Operating temperature	32° to 131°F (0° to 55° C)
	Operating humidity	85% at 131° F (55° C)
Dimensions		6.4 x 2.6 x 0.8 in (16.3 x 6.6 x 1.9 cm)
Management capabilities		ASF, WOL, PXE, DMI, WFM 2.0.

HP Wireless A+G PCI	Dimensions	4.99 x 2.54 x 0.71 in (126.8 x 64.4 x 18.0 mm)
	Weight	0.268 lb (65 g)
	Controller	Atheros AR5414X chipset
	system interface	PCI Spec 2.2
	Network standard	IEEE 802.11a/b/g
	Frequency band	5.1500 to 5.8500 GHz
		2.4000 to 2.4835 GHz
	Operating temperature	32° to 140° F (0° to 60° C), operating
	Storage temperature	-4° to 176° F (-20° to 80° C), non-operating
	Humidity	10% to 85% non-condensing
	Operating voltage	5V ± 5%
	Power consumption	Tx/Rx peak 560/250mA @ 3.3V (max.)
	Output power (approximately)	15 dBm ±2dB
	Receive sensitivity	-90dBm at 11 Mbps (typical)
	Data transfer rate	Standard rates of 1, 2, 5.5, 11, 6, 9, 12, 18, 24, 48, 54 and Super AG Mode108-Mbps

Technical Specifications - Communications

Spreading	DSSS (Direct Sequence Spread Spectrum)
Security	64(40h) bit, 128(104h) bit, WPA, IEEE802.1X, AES-OCB, AES-CCM, Microsoft PEAP, TKIP, WEP
Antenna	External 5dBi antenna
Throughput	108 Mbps (only with Belkin 200 ft (60.96 m) – Indoor 54G or above router that supports 108 Mbps speed) 54 Mbps 200 ft (60.96 m) – Indoor 11 Mbps 200 ft (60.96 m) – Indoor
Certifications	Wi-Fi certified
Certifications for use by country	North America: United States, Canada

Agere 56K PCI Modem	Data Transmission	56,000 Kbps maximum downstream data NOTE: 56 Kbps technology refers to download speeds only and requires compatible modems at server sites. Other conditions may limit modem speed. FCC limitations allow a maximum of 53 Kbps during download transmissions.
	Data Speeds	(Upload only) 33,600/31,200/28,800/26,400/21,600/19,200/16,800/14,400/12,000/9,600/7,200/4,800/2,400/1,200/300
	Data Standards	ITU-T V.90, ITU-T, ITU-T V.34, V.44, V.42, V.42bis21, V.32bis, Bell 212A, and Bell 103
	Fax Speeds	14,400/12,000/9,600/7,200/4,800/2,400/300 b/s
	Fax Mode Capabilities	ITU-T T.31 class 1 FAX, V. 17, V.29, V.27ter, and V.21 Channel 2
	Error Correction and Data Compression	V.44, 42bis, V.42 and MNP2-5
	Power Management	ACPI; PPMI 1.1 and wake support with PME and Vaux; meets PCI 2.3 requirements and PC 2001 requirements
	Upgradeability	Driver upgradeable for future enhancements
	Video	ITU-T V.80 video ready interface
	Other	TIA/EIA 602 standard AT command set Integrated DTE interface with speeds of up to 115.2 Kbps, parallel 16550a UART-compatible interface Optional ring wakeup signal
	Operating Temperature	32° to 158° F (0° to 70° C)
	Operating Humidity	20% to 90%, non-condensing
	Power	Requires a 3.3-V auxiliary power rail on PCI bus Uses only one PCI load (i.e., one grant/request pair), one shared IRQ, one electrical load
	Chipset	Agere Systems SV92PL – Integrated PCI interface with 5-V tolerant buffers and CardBus support
	Dimensions (L X H)	Complies with PCI low profile specifications-6.7 x 2.3 in (17.0 x 5.8 cm) and supports high- and low-profile brackets

Technical Specifications - Communications

Connection	Single RJ-11 connector
Other Features	Digital line protection, call progress monitoring via on-board piezo device, support for high profile and low profile brackets, PnP ID support
Safety	UL recognized to UL 1950, 3rd edition (U.S. and Canada); IEC 950 (TUV, NEMKO, DEMKO, SEMKO); CE Mark, EC 950 (TUV, NEMKO, DEMKO, SEMKO, CE mark
EMC	FCC Part 15, IC ES003, EN 55022, 3rd edition, EN 55024, annex A, EN 61000-4-6, EN 61000-4-8
Telecom	FCC Part 68, IC-CS-03 (Canada); Worldwide PTT approvals
Health	Bare PCB material compliant to 94V-0 or better (marked as such)
Other	PC 2001 compliant, PCI version 2.3, WHQL approved; ACPI compliant

Technical Specifications - Graphics

Integrated Graphics Media Accelerator 3000	3D/2D Controller	Microsoft DirectX® 9 based with support for Pixel Shader 2.0, 4:1 anisotropic filtering, Gaussian texture filtering, shadow maps, volumetric textures, double-sided stencil buffers, and 4 pixel pipes.
	VGA Controller	Integrated
	Bus Type	PCI Express™ x16 (If an external graphics card is installed in a PCI slot, the internal graphics can be enabled or disabled using the system's BIOS setup utility. If an external graphics card is installed in the PCI Express™ slot, the internal graphics cannot be enabled).
	RAMDAC	Integrated, 400 MHz
	Memory	Graphics memory is shared with system memory. Graphics memory usage varies depending on the amount of system memory installed and system load. 8 MB is pre-allocated for graphics use at system boot time. Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.
		System memory equal or greater than 512 MB 8 MB pre-allocated + 248 MB DVMT = max frame buffer of 256 MB
	Controller Clock Speed	400 MHz
	Overlay Planes	Single overlay support with 5x3 filtering
	Maximum Color Depth	32 bits/pixel
	Maximum Vertical Refresh Rate	85 Hz at up to 1920x1440, 85 Hz at 2048x1536. Varies with mode and configuration. See table below.
	Multi-display Support	Support for one CRT via the motherboard's VGA connector. Support for an additional DVI-D display via the optional DVI ADD2 card. Dual independent displays and dual synchronous (Twin or Clone mode) displays are supported.
	Graphics/Video API Support	Microsoft DirectX®9, DirectXVA®, VMR9, GDI/GDI+; OpenGL® 1.4.

Resolutions Supported ¹	Resolution	Maximum Refresh Rate (Hz)	
		Analog Monitor	Digital Monitor
	640 x 480	85	60
	800 x 600	85	60
	1024 x 768	85	60
	1280 x 1024	85	60
	1600 x 1200	85	60
	1920 x 1080	85	60
	1920 x 1200	85	60
	1920 x 1440	85	60
	2048 x 1536	85	60

¹ Modes listed are supported with a single active display. The supported mode list for multiple active displays is a subset of this list. Not all modes will support video playback and some supported modes may use software MC (motion compensation) rather than hardware MC. Not all modes will support 3D acceleration depending on the system configuration (e.g., resolution selected, size of frame buffer, number of installed memory modules, etc.).

NOTE: Other resolutions and refresh rates may be selectable but are not recommended.

Technical Specifications - Graphics

ATI Radeon X1300 (256MB SH) PCIe Graphics Card (256 MB)	Bus type	PCI Express (x16 lanes)	
	Maximum vertical refresh rate	85 Hz	
	Display support	Integrated 400 MHz RAMDAC	
	Display max resolution	2048 x 1536	
	Board display options	DVI-I + TV DVI-I supports analog CRT or flat panel or digital flat panel (using DVI-A, DVI-D or DVI-I connector) DVI-I supports analog CRT or flat panel (with VGA connector and DVI-I to VGA dongle) TV connector is a 4-pin mini-DIN S-video connector	
Board configuration		Specification	Description
		Graphics Chip	RV515
		Core clock	450 MHz
		Memory clock	250 MHz
		Frame buffer	256 MB DDR2
Languages supported		24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish	
Core power		25 W (Max board power)	
Option kit contents		<ul style="list-style-type: none"> • ATI RADEON X1300 PCIe graphics card with full height bracket attached • Low profile bracket • DVI-to-VGA Adapter • Software CD with graphics drivers • Warranty documentation 	
Compliance standards		EMC Emissions: a) FCC Part 15, Subpart B – Unintentional Radiators, Class B Computing Devices for Home & Office Use b) CISPR22: 1997/EN 55022:1998 – Class B – Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment c) Canadian Standard ICES-003 is equivalent to CISPR22 EMC Immunity: CISPR 24:1997/EN 55024:1998 – Information Technology Equipment – Immunity Characteristics – Limits and Methods of Measurement. Safety: UL 60950 (USA) & EN 60950 (EU): Safety of Information Technology Equipment, Including Electrical Business Equipment. All boards meet UL PCB flammability requirements.	

Technical Specifications - Graphics

ATI Radeon X1300 Pro (256MB DH) PCIe Graphics Card	Bus Type	PCI Express (x16 lanes)	
	Maximum Vertical Refresh Rate	85 Hz	
	Display Support	Integrated 400 MHz RAMDAC	
	Display Max Resolution	2048 x 1536	
	Board Display Options	Supports 2 displays via included DMS-59 to dual VGA cable or 2 DVI monitors via optional DMS-59 to dual DVI monitor kit #DL139A. Support TV connection via 7 pin mini Din S-video connector	
	Board Configuration	Specification	Description
	128 MB Frame Buffer	Graphics Chip	RV516
		Core clock	600 MHz
		Memory clock	400 MHz
		Frame buffer	256 MB DDR2 (128 bits wide)
Languages supported	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish		
Core Power	25 W (Max board power)		
Option kit contents	<ul style="list-style-type: none">• ATI Radeon X1300 Pro (256MB DH) PCIe Graphics Card with full height bracket attached• DMS-59 Dual VGA NOTE: The Optional DMS-59 DVI cable can be ordered with HP Option Kit #DL139A <ul style="list-style-type: none">• Software CD with graphics drivers• Low profile bracket to convert the card for using in a low profile chassis• Warranty documentation		
Compliance standards	EMC Emissions: a) FCC Part 15, Subpart B – Unintentional Radiators, Class B Computing Devices for Home & Office Use b) CISPR22: 1997/EN 55022:1998 – Class B – Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment c) Canadian Standard ICES-003 is equivalent to CISPR22 EMC Immunity: CISPR 24:1997/EN 55024:1998 – Information Technology Equipment – Immunity Characteristics – Limits and Methods of Measurement. Safety: UL 60950 (USA) & EN 60950 (EU): Safety of Information Technology Equipment, Including Electrical Business Equipment. All boards meet UL PCB flammability requirements.		

Technical Specifications - Input Devices

HP PS/2 or USB Standard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
		Weight	2 lb (0.9 kg) minimum
	Electrical	Operating voltage	+ 5VDC \pm 5%
		Power consumption	50-mA maximum (with three LEDs ON)
		ESD	CE level 4, 15-kV air discharge
		EMI – RFI	Conforms to FCC rules for a Class B computing device
	Mechanical	Microsoft PC 99 – 2001	Functionally compliant
		Languages	38 available
		Keycaps	Low-profile design
		Switch actuation	55-g nominal peak force with tactile feedback
		Switch life	20 million keystrokes (using Hasco modified tester)
		Switch type	Contamination-resistant switch membrane
		Key-leveling mechanisms	For all double-wide and greater-length keys
		Cable length	6 ft (1.8 m)
		Microsoft PC 99 – 2001	Mechanically compliant
	Environmental	Acoustics	43-dBA maximum sound pressure level
		Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, six surfaces
		Non-operating shock	80 g, six surfaces
		Operating vibration	2-g peak acceleration
		Non-operating vibration	4-g peak acceleration
		Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
		Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
	Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	

Technical Specifications - Input Devices

HP 2-Button Scroll Mouse (PS/2)	Scroll Wheel	8 mm
	Maximum Rotation Speed	30 mm/s
Electrical	Switch Type	Light force micro-switch
	Switch Life	1 million operations
	Mechanical Life	Minimum 200,000 revolutions
	Environmental	Operating Temperature 50° to 122° F (10° to 50° C)
		Non-operating Temperature -22° to 140° F (-30° to 60° C)
	Operating Humidity	10% to 90% (non condensing at ambient)
	Non-operating Humidity	20% to 80% (non condensing at ambient)
	Operating Shock	40 g, 6 surfaces
	Non-operating Shock	80 g, 6 surfaces
	Operating Vibration	2 g peak acceleration
	Non-operating Vibration	4 g peak acceleration
	Operating Voltage	+ 5VDC \pm 10%
	Power Consumption	15mA
	System Consumption	PS/2 mini-din connector
	ESD	CE level 4, 15 kV air discharge
	EMI-RFI	Conforms to FCC rules for a Class B computing device
	PC98	Functionally compliant
Mechanical	Resolution	400 \pm 20% DPI
	Tracking Speed	10 in/s maximum
	Acceleration	100 in/s
	Switch Actuation	85 g nominal peak force
	Switch Life	1,000,000 operations (using Hasco modified tester)
	Cable Length	2 m
Regulatory Approvals	PC98-99	Mechanically compliant
	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BCIQ, C-Tick	

Technical Specifications - Hard Drives

Serial ATA Hard Drives (7200 rpm)	80 GB	Capacity	80,026,361,856 bytes	
		Height	1 in (2.6 cm)	
		Width	Media diameter: 3.5 in (8.9 cm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA	
		Synchronous Transfer Rate (Maximum)	1.5 Gb/s	
		Buffer	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	1.0 ms
			Average	8.5 ms
			Full-Stroke	18 ms
		Rotational Speed	7,200 rpm	
		Logical Blocks	156,301,488	
		Operating Temperature	32° to 140° F (0° to 60° C)	
	160 GB	Capacity	160,041,885,696 bytes	
		Height	1 in (2.6 cm)	
		Width	Media diameter: 3.5 in (8.9 cm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA	
		Synchronous Transfer Rate (Maximum)	1.5 Gb/s	
		Buffer	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	1.0 ms
			Average	8.5 ms
			Full-Stroke	18 ms
		Rotational Speed	7,200 rpm	
		Logical Blocks	312,581,808	
		Operating Temperature	32° to 140° F (0° to 60° C)	

Technical Specifications - Hard Drives

250 GB	Capacity	250,059,350,016 bytes	
	Height	1 in (2.6 cm)	
	Width	Media diameter: 3.5 in (8.9 cm) Physical size: 4 in (10.2 cm)	
	Interface	Serial ATA	
	Synchronous Transfer Rate (Maximum)	1.5 Gb/s	
	Buffer	8 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.8 ms
		Average	<9.0 ms
		Full-Stroke	=17 ms
	Rotational Speed	7,200 rpm	
	Logical Blocks	488,397,168	
	Operating Temperature	41° to 131° F (5° to 55° C)	

Technical Specifications - Optical Storage

SATA DVD-ROM Drive	Height	5.25-inch, half-height, tray-load	
	Orientation	Either horizontal or vertical	
	Interface type	SATA/ATAPI	
	Disc capacity	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)	
	Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)	
	Weight (max)	2.6 lb (1.2 kg)	
	Read speeds	DVD+R/-R/+RW/-RW/+R DL /-R DL	Up to 8X
		DVD-ROM	Up to 16X
		DVD-RAM	Up to 4X
		CD-ROM, CD-R	Up to 48X
		CD-RW	Up to 32X
Removable Storage - Media Compatibility - DVD-ROM	Media	Read	Write
		CD-ROM	Yes
		CD-R	Yes
		CD-RW	Yes
		DVD-ROM	Yes
		DVD-ROM DL	Yes
		DVD-RAM	Yes
		DVD+R	Yes
		DVD+R DL	Yes
		DVD+RW	Yes
		DVD-R	Yes
		DVD-RW	Yes
		DVD-R DL	Yes
		Random	DVD: < 140 ms (typical), CD: < 125 ms (typical)
	Access times (typical reads, including setting)	Full Stroke	DVD: < 250 ms (seek), CD: < 210 ms (seek)
		Cache Buffer	2 MB (minimum)
		Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s -default)
Power	Source	DC Power Requirement	SATA DC power receptacle 5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 5%-200 mV ripple p-p
		DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC --< 600 mA typical, < 1400 mA maximum

Technical Specifications - Optical Storage

Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 90%
	Maximum Wet Bulb Temperature	86° F (30° C)

SATA CD-RW/DVD-ROM Combo Drive

Height	5.25-inch, half-height, tray-load	
Orientation	Either horizontal or vertical	
Interface type	SATA/ATAPI	
Disc capacity	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)	
Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)	
Weight (max)	2.6 lb (1.2 kg)	
Write speeds	CD-R	Up to 48X
	CD-RW	Up to 32X
Read speeds	DVD+R/-R/+RW/ -RW/+R DL/-R DL	Up to 8X
	DVD-ROM	Up to 16X
	CD-ROM, CD-R	Up to 48X
	CD-RW	Up to 32X
Access times (typical reads, including setting)	Random	DVD: < 140 ms (typical), CD: < 125 ms (typical)
	Full Stroke	DVD: < 250 ms (typical), CD: < 210 ms (typical)
Power	Source	SATA DC power receptacle
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p
	DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum
Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 90%
	Maximum Wet Bulb Temperature	86° F (30° C)

Technical Specifications - Optical Storage

SATA DVD+/-RW LightScribe Drive	Height	5.25-inch, half-height, tray-load
	Orientation	Either horizontal or vertical
	Interface type	SATA/ATAPI
	Disc capacity	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)
	Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)
	Weight (max)	2.6 lb (1.2 kg)
	Write speeds	DVD+R Up to 16X DVD+RW Up to 8X DVD+R DL Up to 8X DVD-R DL Up to 4X DVD-R Up to 16X DVD-RW Up to 6X CD-R Up to 48X CD-RW Up to 32X
	Read speeds	DVD-RAM Up to 4X DVD+R/-R/+RW/-RW/+R DL/-R DL Up to 8X DVD-ROM Up to 16X CD-ROM, CD-R Up to 48X CD-RW Up to 32X
	Access times (typical reads, including setting)	Random DVD: < 130 ms (typical), CD: < 120 ms (typical) Full Stroke DVD: < 240 ms (seek), CD: < 200 ms (seek)
	Power	Source SATA DC power receptacle DC Power Requirement 5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 5%-200 mV ripple p-p DC Current 5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum
	Environmental (all conditions non-condensing)	Temperature 41° to 122° F (5° to 50° C) Relative Humidity 10% to 90% Maximum Wet Bulb Temperature 86° F (30° C)

Technical Specifications - Removable Storage

HP 1.44-MB Diskette Drive Size	LED Indicators (front panel)	3.5 in (8.89 cm)
	Read/Write Capacity per Diskette (high/low)	Green
	Drive Height	1.44 MB/720 KB
	Drive Rotation	One-third
	Transfer Rate (high/low)	300 rpm
	Bytes/Sector	500/250 KB/s
	Sectors/Track (high/low)	512
	Tracks/Side (high/low)	18/9
	Access Times	80/80
	Track-to-Track (high/low)	3/6 ms
	Average (high/low)	94/173 ms
	Settling Time	15 ms
	Latency Average	100 ms
	Cylinders (high/low)	80/80
	Read/Write Heads	Two
<hr/>		
HP 16-in-1 Media Card Reader	USB interface	USB 2.0 High-speed device via PCI card or pass -through via internal USB port of system board
	Advance protocol support	<ul style="list-style-type: none"> • Supports hardware ECC (Error Correction Code) function • Supports hardware CRC (Cyclic Redundancy Check) function • Supports MS 4-bit parallel transfer mode • Supports MS-PRO 4-bit parallel transfer mode • Supports SD 4-bit parallel transfer mode • Supports high-speed 50 MHz SD 4-bit card (version 1.1) • Support high-speed 52 MHz MultiMediaCard 8-bit card (version 4.x)
	Supported media types	<ul style="list-style-type: none"> • Supports CompactFlash Card Type I (CF I), CompactFlash Card Type II (CF II), MicroDrive (MD) • Supports 3.3V SmartMedia Card (SM), SmartMedia ROM (SM ROM), Picture Card • Supports Secure Digital Card (SD), Secure Digital ROM Card (SD ROM), miniSD, MultiMediaCard, Secure MultiMediaCard (Secure MultiMediaCard), ROM Type MultiMediaCard (MultiMediaCard ROM), Reduced Size MultiMediaCard (RS MultiMediaCard), MultiMediaCard 4.0 (MultiMediaCard Plus), Reduced Size MultiMediaCard 4.0 (MultiMediaCard Mobile) • Support Memory Stick (MS), Memory Stick ROM (MS ROM), MagicGate Memory Stick (MG), Memory Stick Select, Memory Stick Duo (MS Duo), Memory Stick PRO (MS-PRO), Memory Stick PRO Duo (MS PRO Duo)
	Mechanical	Length (3.5") 124.7 cm
		Width (3.5") 101.6 cm

Technical Specifications - Removable Storage

Environmental	Height (3.5")	25.4 cm
	Length (5.25")	171.6 cm
	Width (5.25")	148.9 cm
	Height (5.25")	42.7 cm
	Operational environmental extremes	Test Parameters/Conditions - Power applied, unit operating on system ±5% nominal supply voltage. 10°C 10% R.H. = 24 hours 10°C 90% R.H. = 24 hours 20°C 90% R.H. = 24 hours 30°C 90% R.H. = 24 hours 40°C 90% R.H. = 24 hours 50°C 90% R.H. = 24 hours 50°C 10% R.H. = 24 hours
Approvals	Storage environmental extremes	Test Parameters/Conditions 60°C @ 80% R.H. for 96 hours -30°C @ 20% R.H. for 48 hours No power applied Delta °C < 1.0°C/min Delta % R.H. < 1.5% R.H./min
	USB-IF, WHQL, Compliant with USB Mass Storage Class Bulk only Transport Specification Rev. 1.0, Compliant Intel Front Panel I/O Connectivity Design Guide V. 1.2	
	FCC, CE, BSMI, C-Tick, VCCI, MIC, cUL, TUV-T	

Technical Specifications - Environmental Data

Eco-Label Certifications & declarations This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Federal Energy Management Program (FEMP)
- IT ECO declaration
- EPEAT

Longevity and Upgrading This product is designed to be upgraded, possibly extending its useful life by several years. Spare parts are available throughout the warranty period and for up to 15 months after the end of production. Upgradeability features contained in the product include:

- 6 external USB ports
- 2 internal USB ports
- 2 external 5.25" drive bays
- 2 internal 3.5" drive bays
- 1 external 3.5" drive bay
- 1 empty standard PCI slot
- 2 empty standard PCIe x1 slots
- 1 empty standard PCIe x16 slot
- 2 memory slots
- 1 Serial port
- 1 Optional second serial port
- 1 Parallel port

Spare parts are available throughout the warranty period and for up to 5 years after the end of production.

Batteries

Batteries used in the product do not contain:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight
- Lead greater than 4000ppm by weight.

Battery size: CR2032 (coin cell)

Battery type: Lithium

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Silver level, see <http://www.epeat.net>
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 0% recycled materials (by wt.)
- This product is >90% recyclable when properly disposed of at end of life.

Packaging Materials

- Corrugated Paper – TBD g
- EPE Foam – TBD g
- LDPE Bag – TBD g

Technical Specifications - Environmental Data

The EPE foam packaging material is made from 30–60% recycled content.

The corrugated paper packaging materials contains at least 80% recycled content.

RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

Technical Specifications - Environmental Data

Hewlett-Packard**Corporate Environmental
Information**

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

© Copyright 2008 Hewlett-Packard Development Company, L.P.

All rights reserved.

The information contained herein is subject to change without notice.

Intel and Pentium are U.S. registered trademarks of Intel Corporation. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.