
Overview

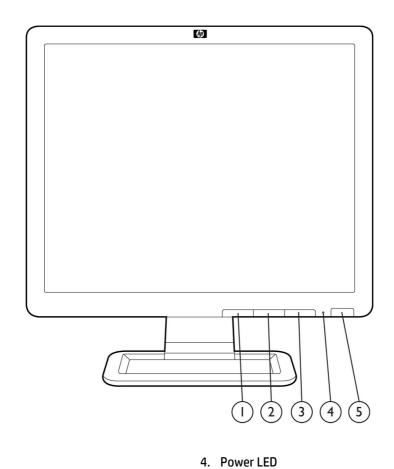

5. Power

- 1. Menu/Select
- 2. "-" OSD Navigation/Decrease Adjust/Auto Adjust
- 3. "+" OSD Navigation/Increase Adjust

Models

Product number: EM886AA



Technical Specifications

Panel	Туре	17-inch Active Matrix TFT (thin film transistor)		
	Viewable Image Area (diagonal)	17 in (43.2 cm)		
	Screen Opening (W × H)	13.3 x 10.6 in (33.9 x 27.1 cm)		
	Panel Type	TN		
	Aspect Ratio	5:4		
	Viewing Angle (typical)*	160 degrees horizontal/160 degrees vertical (10:1 minimum contrast ratio)		
	Brightness (typical)*	250 nits (cd/m ²)		
	Contrast Ratio (typical)*	1000:1		
	Response Rate (typical)*	5 ms (rise + fall)		
	Pixel Pitch	0.264 mm		
	Backlight Lamp Life (to half brightness)	50K hours		
	Color Gamut	72%		
	* All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.			
On Screen Display (OSD) Controls	Buttons or Switches	3-button OSD (menu, minus, plus); power on/off		
	Languages	English, French, German, Spanish, Italian, Dutch, Simplified Chinese (Portuguese and Japanese on regional models)		
	User Controls	Image Control (auto, horizontal, vertical, sharpness), Color Temperature (6500k, 9300k, Custom, sRGB), Brightness, Contrast, Clock, Clock Phase, Monitor Management (power saver, sleep, power on recall, power on status, DDC/CI support, bezel power LED), Factory Reset		
Signal Interface/	Horizontal Frequency	24 to 83 kHz		
Performance	Vertical Frequency	50 to 76 Hz		
	Native Resolution	1280 x 1024 @ 60 Hz (recommended) (SXGA)		
	Maximum Resolution	1280 x 1024 @ 60 Hz (recommended) (SXGA)		
	Preset VESA Modes	1280 x 1024 @ 60 Hz		
	(non-interlaced)	1280 x 960 @ 60 Hz		
		1280 x 800 @ 60 Hz		
		1280 x 720 @ 60 Hz		
		1024 x 768 @ 60 Hz		
		800 x 600 @ 60 Hz		
		720 x 400 @ 70 Hz		
		640 x 480 @ 60 Hz		
	Max Pixel Clock Speed	140 MHz		
	User Programmable Modes	Yes, 8		
	Anti-Glare	Yes		
	Anti-Static	Yes		



Technical Specifications

	Default Color Temperature	6500 degrees Kelvin		
Video Input	Plug and Play	Yes		
	Input Signal	15 pin D-sub (Analog VGA)		
	Input Impedance	75 ohms (2 % value change	e allowed)	
	Sync Input	TTL separate synch		
	Video Cable	Detachable 15-pin D-sub n	nini connector	
	Video Cable Length	70.8 in (1.8 m)		
Power	Power Supply	Internal power adapter		
	Input Voltage	100 - 240 VAC		
	Nominal Current	< 0.50 Ampere		
	Frequency	50/60 Hz		
	Maximum	25.5 watts		
	Typical	23 watts		
	Power Saving	< 2 watts		
	Power Cable Length	74.8 in (1.9 m); detachable		
Mechanical	Dimensions (H x W x D)	Unpacked w/ stand	15.2 x 14.8 x 8.1 in (38.6 x 3	37.7 x 20.6cm)
		Display Head only	12.4 x 14.8 x 2.4 in (31.6 x 3	37.7 x 5.7 cm)
		Packaged	4.8 x17.6x 18.6 in (12.1 x 4	4.8 x 47.2 cm)
	Weight	Head only	7.5 lb (3.4 kg)	
		Unpacked	8.6 lb (3.9 kg)	
		Packaged	11.2 lb (5.1 kg)	
	Tilt Range	-5 to +25 degrees vertical	ilt	
	Swivel Range	None		
	Height Adjustable	No		
	Pivot Rotation	No		
	Base and Stand	Detachable		
Environmental	Temperature – Operating	41° to 95° F (5° to 35° C) no	on-condensing	
	Temperature– Non- operating	-4° to 140° F (-20° to 60° C)	
	Humidity – Operating	20% to 80%, non-condens	ng	
	Humidity – Non-operating	5% to 90%		
	Altitude – Operating	0 to 16,404 ft (0 to 5,000 n	n)	
	Altitude – Non-operating	0 to 40,000 ft (0 to 12,192	m)	
Environmental Data	Eco-Label Certifications and Declarations	This product has received or is in the process of being certified to the followir approvals and may be labeled with one or more of these marks:		-
		IT ECO declarationTCO 5.0		
	Energy Consumption	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz



HP Compaq LE1711 17-inch LCD Monitor

Technical Specifications

Normal Operation	17.4W	17.6W	17.4W	
Sleep	0.49W	0.64W	0.47W	
Off	0.36W	0.52W	0.36W	
Additional Information	This product is in compliance with the Restrictions of Hazardous Substances (RoHS) Directive, 2002/95/EC.			
	This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive, 2002/96/EC.			
	This product is in complian California; Safe Drinking Wa			
	Plastics parts weighing over 25 grams used in the product are marked per 11469 and ISO1043. This product contains 0% recycled materials (by wt.) This product is 96.2% recyclable when properly disposed of at end of life Packaging Materials External: • Paper / Cardboard – 774 g • Polyethylene low density – 25 g			
	Internal:			
	• EPS (Expanded Polys	styrene) – 219 g		
RoHS Compliance	Hewlett-Packard is commit environmental laws and re- of Hazardous Substances (obligations by meeting the basis. By July 1, 2006, RoH to levels below legal limits Directive, except where it is feasible alternative (as ind Directive).	gulations, including the E RoHS) Directive. HP's goa requirements of the RoH S substances will be virtu) for all HP electronic pro s widely recognized that	European Union Restriction al is to exceed compliance IS Directive on a worldwide ually eliminated (virtually = ducts subject to the RoHS there is no technically	
Material Usage	This product does not cont regulatory limits (refer to t www.hp.com/hpinfo/globa gen_specifications.html	he HP General Specificati	ion for the Environment at:	
	 Asbestos Certain Azo Colorant Certain Brominated I retardants in plastic Cadmium Chlorinated Hydroca Chlorinated Paraffin Formaldehyde 	Flame Retardants - may i s irbons	not be used as flame	

• Halogenated Diphenyl Methanes



Technical Specifications Lead carbonates and sulfates Lead and Lead compounds Mercuric Oxide Batteries • Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user. Ozone Depleting Substances • Polybrominated Biphenyls (PBBs) • Polybrominated Biphenyl Ethers (PBBEs) Polybrominated Biphenyl Oxides (PBBOs) Polychlorinated Biphenyl (PCB) Polychlorinated Terphenyls (PCT) Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications. **Radioactive Substances** • Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO) Packaging HP follows these guidelines to decrease the environmental impact of product packaging: Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials. Eliminate the use of ozone-depleting substances (ODS) in packaging materials. Design packaging materials for ease of disassembly. Maximize the use of post-consumer recycled content materials in packaging materials. Use readily recyclable packaging materials such as paper and corrugated materials. Reduce size and weight of packages to improve transportation fuel efficiency. Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards. End-of-life Management Hewlett-Packard offers end-of-life HP product return and recycling programs and Recycling in many geographic areas. To recycle your product, please go to: www.hp.com/recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment. **Hewlett-Packard** For more information about HP's commitment to the environment: Corporate Environmental Global Citizenship Report www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Information **Eco-label certifications** www.hp.com/hpinfo/globalcitizenship/environmentproductdesign/ ecolabels.html ISO 14001 certificates:



Technical Specifications

		www.hp.com/hpinfo/globa operations/envmanageme		
Options	HP LCD Speaker Bar — Part number NQ576AT	The HP LCD Speaker Bar let monitor without taking up conveniently powered thro adapters to be concerned a monitor to bring audio sup	ts you add stereo audio output to your HP flat panel any additional desk space. The Speaker bar is ough a USB port so there are no power cords or AC about. It attaches easily to the bottom of the port features such as high-quality speakers and an ght to the desktop. Sold separately. For more	
	HP LCD Monitor Quick Release—Part number EM870AA*	you to quickly and securely	pliant, LCD monitor mounting solution that allows / attach an LCD monitor to a variety of stands, Ints. For more information, refer to this product's	
	HP Integrated Work Center Stand—Part number LH526AA	monitor and an HP Compac select HP Thin Clients on a	24 inch (43.18- to 60.96 cm) diagonal HP LCD g 8000 series Ultra-slim Desktop PC as well as single stand for the convenience of an "all-in-one" mation, refer to this product's QuickSpecs	
	HP Integrated Work Center for Small Form Factor—Part number QK549AT	monitor with an HP Compa	o 24-inch (43.18 to 60.96 cm) diagonal HP LCD q Small Form Factor Desktop PC. This compact s you valuable desktop room to make the most of a nvironment.	
	HP Security Lock—Part number PC766A	Combines aircraft-grade st monitor and help prevent t	eel and Kevlar fiber to securely lock down your heft.	
	* The HP Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) for all devices mounted. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads.			
Other	Accessories Included	Detachable VGA cable, deta CD.	achable AC power cord, documentation kit, and user	
	Software	times to help protect the m power consumption and en HP Display Assistant is a so theft deterrence, and color	re allows you to schedule Sleep mode at preset nonitor against image retention, drastically lower nergy costs, and extend the lifespan of the monitor. oftware utility that allows monitor adjustment, calibration using the Display Data Channel CI) protocol of the connected PC.	
	User Guide Languages	Traditional Chinese, Japane	ese, French, LA Spanish, Korean, Simplified Chinese, ese, Danish, Dutch, Finnish, German, Italian, <, Polish, Russian, Slovenian, Turkish	
	Warranty Languages	Americas	English, Canadian French	
		LA	Spanish, Brazilian Portuguese	
		EMEA	English, Danish, Dutch, Finnish, European French, German, Italian, Norwegian, Castilian Spanish, Swedish	



Technical Specifications

		Asia/Pacific	English, Bahasa, S. Chinese, T. Chinese, Korean, Japanese, Chinese	
	Color	Black/Silver		
	VESA Mounting Support	Yes (Standard 4 hole pattern, 100 mm)		
	Kensington Lock-ready	Yes		
Certification and Compliance	(German ergonomic), BSMI approvals, CE Marking, FCC	ect guidelines, CISPR, VCCI, CSA (Canada), ACA (Australia), TUV and GS Mark SMI (Taiwan), CCC (China), MIC (South Korea), NOM (Mexico), Eastern European FCC approval, TCO 5.0 Displays (emissions, ergonomics, environment), Microsoft® crosoft Windows 2000, Microsoft Windows XP, and Windows Vista®), GOST (Russia),		
Compatibility	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.			
Service and Warranty	Protected by HP, including a 3 year standard limited warranty Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion. Optional Care Pack Services are extended service contracts which go beyond your standard warranties. With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.			
	* HP Care Pack Services extend service contracts beyond the standard warranties. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: www.hp.com/go/lookuptool. Additional HP Care Pack Services information by product is available at: www.hp.com/hps/carepack. Service levels and response times for HP Care Packs may vary depending on your geographic location.			

© 2009, 2013 Hewlett-Packard Development Company, L.P.

HP shall not be liable for technical or editorial errors or omissions contained herein. The information is provided as is without warranty of any kind and is subject to change without notice. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower. Microsoft, Windows, and Windows Vista are trademarks of the Microsoft group of companies.

