








Part Number:

MS-184060-2

Revision 20140225 - Generated 12-Mar-2014

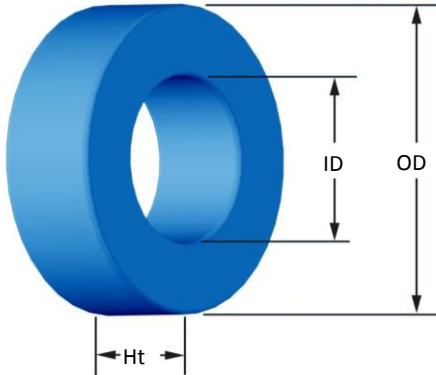

OD	(nom. - bare core)	46.74 mm	1.840 in
	(max. - after coating)	47.63 mm	1.875 in
ID	(nom. - bare core)	24.13 mm	0.950 in
	(min. - after coating)	23.32 mm	0.918 in
Ht	(nom. - bare core)	18.03 mm	0.710 in
	(max. - after coating)	18.92 mm	0.745 in
Mass	(approximate)	120 grams	
Magnetic Dimensions	A_e - Eff. Mag. Cross Section	1.99 cm ²	
	L_e - Eff. Mag. Path Length	10.743 cm	
	V_e - Eff. Core Volume	21.4 cm ³	
	W_A - Min. Eff. Window Area	4.27 cm ²	
	s_a - Surface Area	81.7 cm ²	
Inductance	m_l - mean length per turn	7.38 cm	
	μ_r (reference)	60	
	A_L value (nominal)	135 nH/N ²	
	Test Winding	N=70, #20 AWG	
	Frequency	10 kHz	
Core Loss	Voltage on Agilent 4284A	0.62 V	
	AL tolerance	±8%	
	Core Loss(mW/cm ³):	$\frac{f}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$	
	where B_{pk} expressed in gauss, f expressed in hertz, and:	$a=7.890E+09, b=7.111E+08, c=8.980E+06, d=2.846E-14$	
	B_{pk}	1000 G	
DC Saturation	frequency	50 kHz	
	Core Loss (nominal)	323 mW/cm ³	
	Core Loss (maximum)	372 mW/cm ³	
	$\% \mu_i \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and:	$a=1.000E-02, b=2.151E-06, c=1.841, d=0.000$	
Coating/Pkg	H_{DC}	100 Oe	
	Percent Initial Perm(nom.)	49.2%	
	Percent Initial Perm(min.)	40.9%	
	Coating Type:	Blue Epoxy	
	Voltage Breakdown (min.)	1000 Vrms	
Winding Table	Limit	0.1 mA, 5 s	
	Package Quantity	100 Pcs/Box	
	Wire Size	AWG	8
		mm	3.150
	Single Layer	Turns	17
		Rdc(Ω)	2.6 m
	Full Winding	Turns	22
		Rdc(Ω)	3.3 m

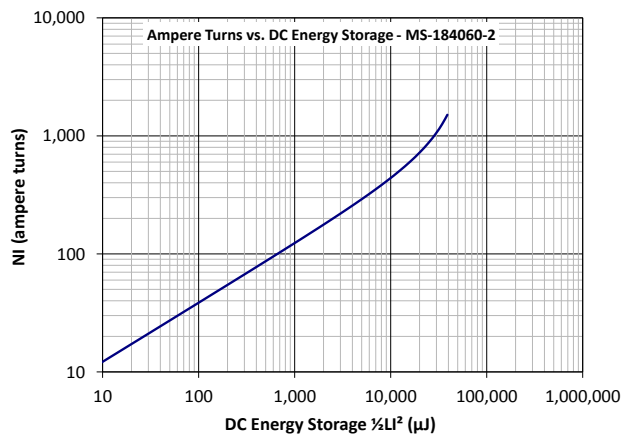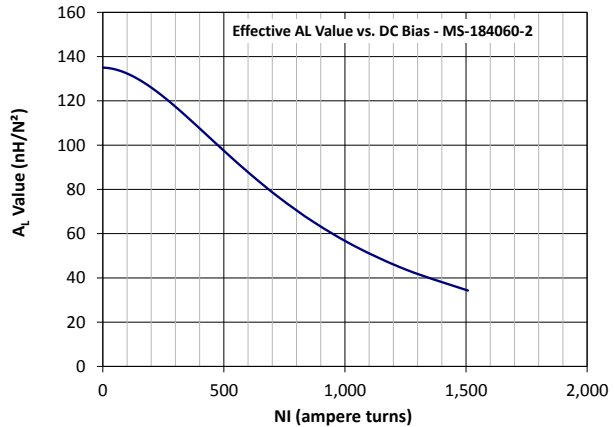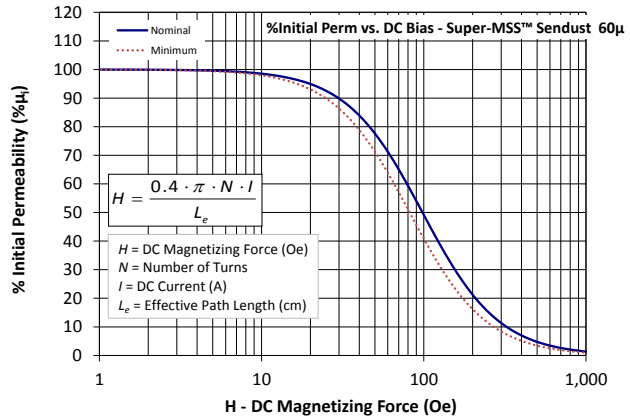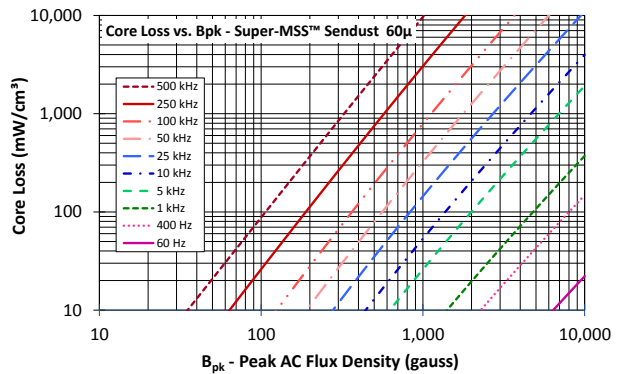

Winding Table	Wire Size	AWG	8	10	12	14	16	18	20	22	24	26	28
		mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
	Single Layer	Turns	17	22	28	35	45	56	70	88	111	138	173
		Rdc(Ω)	2.6 m	5.3 m	10.7 m	21.4 m	43.7 m	86.5 m	171.9 m	343.7 m	689.5 m	1.4	2.7
Full Winding	Turns	22	35	54	83	128	199	307	476	736	1,139	1,764	
		Rdc(Ω)	3.3 m	8.4 m	20.7 m	50.7 m	124.3 m	307.3 m	753.9 m	1.9	4.6	11.3	27.7

Micrometals Arnold Powder Cores, A Division of Micrometals, Inc. - 5615 E. La Palma Ave., Anaheim, California 92807 USA

Ph: +1-714-970-9400, Toll Free in USA: +1-800-356-5977, Asia Pacific Sales: +852 3106 3736

www.MicrometalsArnoldPowderCores.com