


Instant Gigabit Network Adapter (32-bit)

1000 Mbps Speed in Your 10/100 Environment

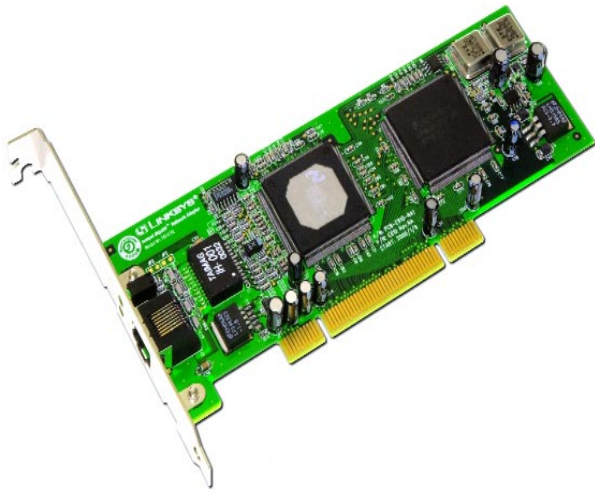

Instant Gigabit Network Adapter (32-Bit)
(EG1032)

Benefits

- Easy to Use Plug-and-Play 10/100/1000 PCI Network Card
- Full Duplex Capability at Speeds Up To 2000Mbps
- Connects to Both 10Mbps, 100Mbps, and 1000 Mbps Fast Ethernet Networks
- Power On Your PC From Anywhere on the Network with Wake-On-Lan Management
- Works With Most Operating Systems
- Free Technical Support - 24 Hours a Day, 7 Days a Week for North America Only
- One Year Limited Warranty

Unprecedented Gigabit Performance in a Managed PCI Card for Desktop Computers

Unprecedented speed is now available over your existing network cabling! Built to run the fastest video, publishing, and database network applications, the Instant Gigabit Network Adapter is a high performance network adapter for PCI local bus computers. Boasting an incredible maximum data throughput of 2000 megabits-per-second in full duplex mode, it includes a 10BaseT/100BaseTX/1000BaseTX port, which means that you can begin integrating Gigabit now—even if you don't plan on upgrading to a 1000Mbps network right away.

The Instant Gigabit Network Adapter is Windows Plug-and-Play compatible. The card also runs on most operating systems, including Windows 2000. Wake-On-LAN support is built in—you can wake up your workstations from anywhere on the network! Built-in support for the widest range of PCI motherboards, networking hardware, and software means you don't have to worry about compatibility.

Features

- High-Speed Performance
- Automatically Adjusts to Full or Half Duplex at 10/100/1000 Mbps
- Wake-On-LAN and Plug-and-Play Compatible
- Runs with Virtually All Major Network Operating Systems
- Bus Mastering Architecture Supports 1000Mbps Speeds
- Diagnostic LEDs For Easy Troubleshooting
- Easy to Install and Use
- VLAN Support
- IEEE 802.3ab Flow Control Supported
- IEEE 802.1p Priority Queuing Support
- 33 Mhz, 32-bit PCI v2.2
- Free Technical Support - 24 Hours a Day, 7 Days a Week for North America Only
- One Year Limited Warranty

Specifications

Model	EG1032
Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3ad, IEEE 802.1p, IEEE802.1Q, PCI 2.1, PCI 2.2, ACPI
Protocol	CSMA/CD
Ports:	1 Straight-Through 10BaseT/100BaseTX/ 1000BaseT RJ-45 Port (Auto-Senses Speed and Duplex)
Cabling Type:	10BaseT: UTP/STP Category 3 or better 100BaseTX: UTP/STP Category 5 or better 1000BaseT: UTP/STP Category 5E or better
Topology:	Star
Speed:	Full Duplex: 20Mbps,200Mbps or 2000Mbps Half Duplex: 10Mbps,100Mbps or 1000Mbps
WOL Support:	Remote Wake-Up Power Management Event (PME)
Bus Type:	32-Bit PCI
LEDs:	Link/Activity, 1000Mbps


Environmental

Dimensions:	5" x 6.8" x .75" (127mm x 173mm x 19mm)
Unit Weight:	3.2 oz. (9.065 Kg)
Power:	5W Maximum
Certifications:	FCC Class B CE Mark, Commercial UL and CSA Listed
Operating Temp.:	32°F to 122°F (0°C to 49°C)
Storage Temp.:	-4°F to 158°F (-20°C to 70°C)
Operating Hum.:	10% to 85% Non-Condensing
Storage Hum.:	5% to 90% Non-Condensing

Package Contents

Instant Gigabit® Network Adapter (32-bit)

- One Instant Gigabit® Network Adapter
- One Driver Disk
- One User Guide and Registration Card



Linksys

17401 Armstrong Ave.
Irvine, CA 92614 USA

Information	(800) 546-5797
Technical Support	(800) 326-7114 (949) 261-1288 (949) 261-8868
Fax	(949) 261-8868
World Wide Web	http://www.linksys.com
Email	sales@linksys.com support@linksys.com
China	
Tech Support	(10) 6432 1920
Sales	(10) 6432 1923
Fax	(10) 6437 6891
Japan	
Telephone	(03) 5259-5139
Fax	(03) 5259-5117
Philippines	
Telephone	(632) 638 5580
Fax	(632) 635 6772
Singapore	
Telephone	552-8998
Fax	552-1024
Thailand	
Telephone	717-0770
Fax	717-0738
United Kingdom	
Tech Support	0870 7393939
Sales	01245 352403
Fax	0870 7393938

