

ViewSonic® VP191b LCD Display

19.0" THINEDGE™ ULTRA-SLIM BEZEL DISPLAY



An intensive visual experience without boundaries.

Featuring **AMPLIFIED IMPULSE™ TECHNOLOGY**, the innovative VP191b LCD display with **THINEDGE ULTRA-SLIM BEZEL DESIGN** is ideal for multiple-display configuration, enhancing productivity, accuracy and decision-making for financial traders, corporate planners, graphics professionals and engineers. Digital HDTV clarity, 170° XtremeView® wide viewing angles and **CLEARMOTIV™ 8MS VIDEO RESPONSE** deliver immaculate performance for high-density graphics and mixed-media data. Comprehensively equipped with **HEIGHT, PIVOT*, TILT, AND SWIVEL** adjustments and multiple digital/analog inputs, the VP191b sets the world-class standard for professional flat-panel displays.



ThinEdge design is ideal for multi-panel setups. Four unit panel-module-only (without base) multi-packs available.

Speed, style, and versatility to optimize your options.

❖ ClearMotiv technology

Ultra-fast 8ms (gray-to-gray) video response enables digital HD-quality full-motion video. Intermediate gray-to-gray, brightness and color changes comprise the vast majority of video transitions.

❖ Amplified Impulse technology

Advanced amplified impulse technology accelerates grayscale transitions for superior motion video and gaming.

❖ ThinEdge maximizes your productivity

The ultra-slim 0.71" bezel enhances your visual experience with clean, minimalist borders around the active image area. Suitable for tiling and stacking

❖ Ideal for multiple-monitor setups

ThinEdge minimizes bezel gaps between panels for a virtually continuous viewing area in multiple-panel setups.

❖ Pivot*, height, swivel and wall-mount versatility

VESA® wall-mount interface and detachable adjustable base.

❖ OPTISYNC™ multiple analog/digital inputs expand your connectivity

❖ Full 19" viewable screen

❖ 1280x1024 native resolution

❖ High brightness and contrast

250-nit brightness (typ) and 700:1 contrast ratio (typ).

❖ XtremeView 170° viewing angles

❖ HDTV-720p ready

❖ Integrated power supply with hard power switch

❖ TCO'99 and ENERGY STAR®



ThinEdge

ViewSonic® 
the choice of professionals

*Pivot function not supported by ViewSonic on Apple computers.

ViewSonic® VP191b LCD Display

19.0" THINEDGE™ ULTRA-SLIM BEZEL DISPLAY




Pivot feature saves time

Spend less time scrolling long documents. Simply rotate your screen from landscape to portrait.



Wide-travel height adjustment

With over 4 1/4 inches of travel, this LCD fits just right.

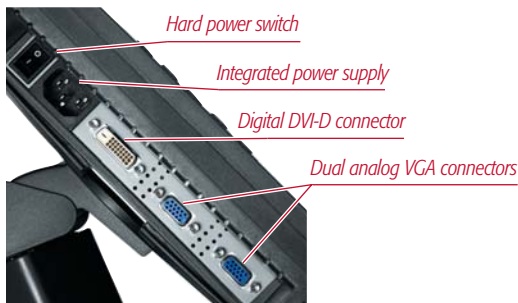

LCD PANEL	Type	19" color TFT active matrix SXGA LCD
	Display Area	14.8" (horizontal) x 11.9" (vertical); 19.0" diagonal
	Optimum Resolution	1280x1024
	Contrast Ratio	800:1 (typ)
	Viewing Angles	170° horizontal, 170° vertical @ contrast ratio > 10
	Response Time	8ms (gray-to-gray); 20ms (black-white-black, typ)
VIDEO INPUT	Brightness	250 cd/m2 (typ)
	Glass Surface	Anti-glare
	Analog	Two RGB Analog (75 ohms, 0.7/1.0 Vp-p)
	Digital	DVI-D (TMDS, 100 ohms)
COMPATIBILITY	Frequency	F _H : 30~82kHz, F _V : 50~85Hz
	Sync	H/V separated (TTL), composite, sync-on-green
	PC	VGA up to 1280x1024 non-interlaced
CONNECTOR	Mac***	Power Mac™ G3/G4/G5 up to 1280x1024. Pivot function not supported by ViewSonic.
	HDTV	480p, 720p
POWER	Analog	15-pin mini D-sub x2
	Digital	Digital DVI-D
	Power	3-pin plug
OPERATING CONDITION	Voltage	AC 100~240V (universal), 50~60Hz
	Consumption	35W (typ)
CONTROLS	Basic	Power, 1, down, up, 2
	OnView®	Auto image adjust, contrast, brightness, input select, color adjust (9300K, 6500K, 5400K, 5000K, user color), information (mode, model number, serial number), manual image adjust (H. size, H. position, V. position, fine tune, sharpness), setup menu (language, resolution notice, OSD position, OSD timeout, OSD background), memory recall
OPERATING CONDITION	Temperature	32~104° F (0~40° C)
	Humidity	10~90% (non-condensing)
DIMENSIONS (W x H x D)	Physical	416mm x 460mm x 238mm (with stand)
		16.4" x 18.1" x 9.4" (with stand)
		416mm x 341mm x 55.3mm (without stand)
		16.4" x 13.4" x 2.2" (without stand)
WEIGHT	Net	16.5 lb. (7.5 kg) with stand; 11.2 lb. (5.1 kg) without stand
	Gross	20.9 lb. (9.5 kg) with stand; 14.5 lb. (6.6 kg) without stand
REGULATIONS		UL, cUL, FCC-B, CB, CE, ENERGY NOM, TUV/GS, TUV Ergo, (covers ISO13406-2 and MPR II), TCO'99, NEMKO, SEMKO, DEMKO, FIMKO, GOST-R, hygienic, SASO, PCBC, VCCI, BSMI, CCC, PSB, C-TICK, TUV-S
POWER MANAGEMENT		Meets TCO and ENERGY STAR® standards
PACKAGE CONTENTS		LCD display, video cables (VGA and DVI-D), power cable, ViewSonic Wizard CD, Portrait/Pivot CD software
WARRANTY		Three-year limited warranty on parts, labor and backlight

specifications



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by the British Standards Institution.

ViewSonic® 
the choice of professionals

ViewSonic Corporation • 381 Brea Canyon Road, Walnut, CA 91789

Phone (800) 888-8583 or (909) 444-8888 • In Canada (866) 262-1967 • Fax (909) 839-7922 • SalesInfo@ViewSonic.com • ViewSonic.com

**Adapter may be required. Analog adapter available from ViewSonic. Specifications subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2005 ViewSonic Corporation. All rights reserved. [12413-02B-05/05] VP191b-1

For more product information, visit us on the web at ViewSonic.com