


SPECIFICATIONS	
article number	150.012.071
max. working pressure	720 bar
max. spreading	833 mm
max. spreading force	196 kN / 20 t
min. spreading force in accordance with EN & NFPA	60 kN / 6.1 t (25 mm from the tips over full spreading range)
max. squeezing force	82 kN / 8.4t
max. pulling distance	640 mm
max. pulling force (with pulling attachments)	107 kN / 10.9 t
weight, ready for use	24.6 kg
dimensions (LxWxH)	863x320x230 mm
temperature reach	-20° + 80° C
required oil contents	233 cc (effective)

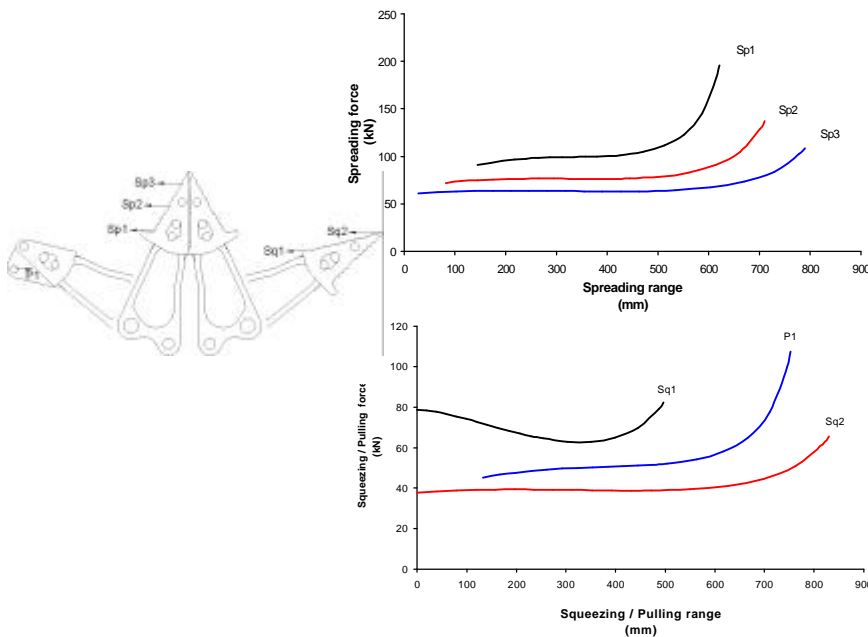

ACCESSORIES	Art.no.
maintenance set, OS 3260+	150.113.046
spare tip	150.013.188
cutting tip	150.013.166
set pulling attachments	150.182.021
set pulling chains 3 m + 1.5 m	150.582.261
torque wrench, 40-200 Nm	150.581.671
cap hexagon 32 mm	150.581.674

SAFETY FACTORS / TESTS

Safety factor tool, hydraulic: 2 x 720 bar = 1440 bar
Safety factor hoses: 4 x 720 bar = 2880 bar
Endurance test deadman's handle: 6000 cycles
Endurance test tool: 1000 cycles of opening and closing while arms are loaded with max. force at 720 bar .

NORMS	TESTED	CLASS
prEN 13204	✓	BS60/833-24.6
DIN 14751-T2	✓	SP 45
NF S61.571	✓	EH 60-60
NFPA 1936	✓	

Manufacturing sales & service worldwide

Holmatro Rescue Equipment
 P.O. Box 33, 4940 AA Raamsdonksveer
 The Netherlands
 tel.: + 31 (0)162 - 58 92 00
 fax: + 31 (0)162 - 52 24 82
 e-mail: info@holmatro.com
 homepage: www.holmatro.com

Manufacturing sales & service U.S.A., Canada and Latin America

Holmatro, Inc.
 505 McCormick Drive, Glen Burnie, MD
 21061
 U.S.A.
 tel.: + 1 - 410 - 768 - 9662
 fax: + 1 - 410 - 768 - 4878
 e-mail: info@holmatro-usa.com

© Holmatro® 0202

All information provided herein was carefully examined. We assume no liability however for any mistakes or incompleteness. Subject to error, revision and technical modifications

