

W156.W158.W1510

15U Rackmount Server Cabinet



INTRODUCTION

W156, W158, W1510 are high-quality aluminum structures. Cabinet is complete lockable, cable management tunnels on both sides. this stylish expandable and secure 19" rack cabinet can protect your investment in computer equipment against environmental elements such as heat and dust while adding organization and security to your computer system design.


FEATURES

- A** Universal Fit to Rackmount Chassis from IBM, HP, Dell and iStarUSA Chassis
- B** Front and Rear Security Lock to Prevent Unauthorized Access to Server and Data
- C** Easy Cabling Management System Can Route Cable Front to Back and Top to Bottom
- D** Fully Adjustable Horizontal Mounting Rails to Ensure the Best Fit of Rackmount Chassis
- E** Custom Front Panel Door with Silk Screen Option Can Enhance Product Image and Uniformity in Product Line
- F** Honey-cone Air Grid Provide Maximum Air Flow
- G** Quick Release Doors: Front and Rear Doors Can be Interchanged with Each Other and Also Can Be Easily Moved to The Opposite Side for Left-handed or Right-handed Hinging
- H** Quick Release Side Panels: Easy Removal Side Panels with Latches are Convenient for Routine Maintenance
- I** Easy Relocation: Heavy-duty Steel Casters Provide the Mobility
- J** Adjustable Leveling Feet Included for Floor Mounting
- K** Labeled U Positions are Convenient for Determining Where to Install Rack-mount Devices



W156.W158.W1510

DRAWING

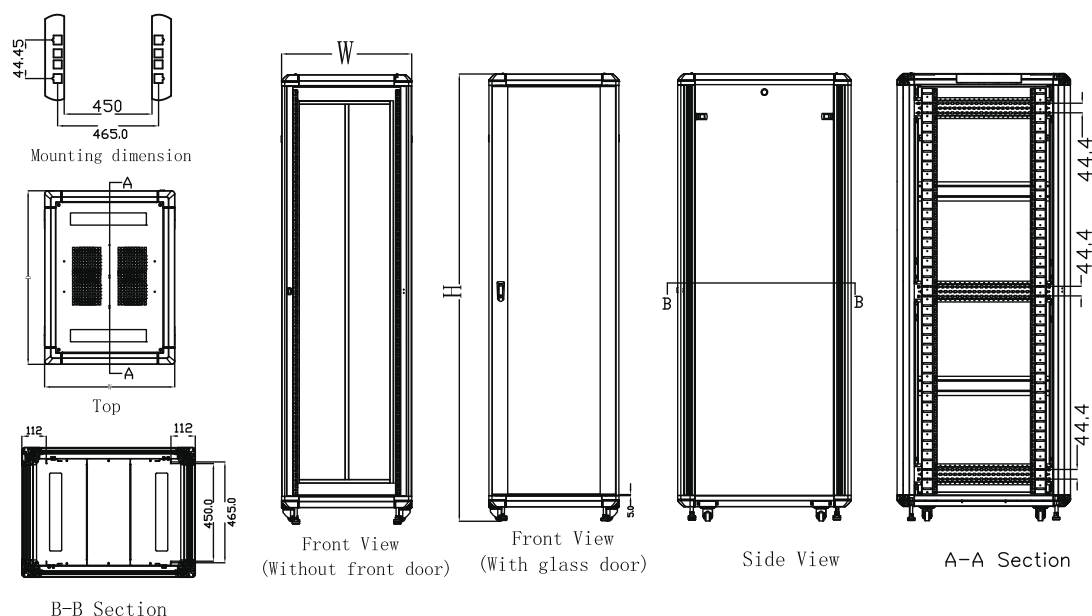

SPECIFICATIONS

Model Number	W156	W158	W1510
RoHS Compliance Version	Yes	Yes	YES
Rack Units	15U	15U	15U
Dimensions [WxHxD]	23.6 x 34.2 x 23.6 inch	23.6 x 34.2 x 31.5 inch	23.6 x 34.2 x 39.37 inch
Internal Height	27.25inch	27.25inch	27.25inch
Internal Dimensions	Post-to-post: 17.75" Hole-to-hole: 18.5" Rail-to-rail: 16.87" Max Depth: 17.25"	Post-to-post: 17.75" Hole-to-hole: 18.5" Rail-to-rail: 16.87" Max Depth: 25.12"	Post-to-post: 17.75" Hole-to-hole: 18.5" Rail-to-rail: 16.87" Max depth: 33"
Cooling	2 120mm 220V AC fans with dust filter system installed on top of cabinet	Up to 4 120mm 220V AC fans with dust filter system can be installed d on top of cabinet	Up to 6 120mm 220V AC fans with dust filter system can be installed d on top of cabinet
Basic Equipment	Variable 19" Profiles at Front and Backside Vented Lockable Doors at Front and Backside Lockable Side Panels w/ Quick Lockers		
Color	RAL7032(Pebble-Grey) / RAL9011(Black) Special Color on Request - Minimum Order 10 pcs		
Safety	TUEV		
EMI Noise Filter	CE		
Packaging Information	Side Panel: Door F/R: Accessories: Gross Weights:	Side Panel: Door F/R: Accessories: Gross Weights:	Side Panel: Door F/R: Accessories: Gross Weights:
Materials	Frame: Aluminum Base: SPCC Cold Rolled Steel t1.2 Mounting Rails: SPCC Cold Rolled Steel t2.0 Top Panel: SPCC Cold Rolled Steel t1.2 Side Panels: SPCC Cold Rolled Steel t1.2 Doors: SPCC Cold Rolled Steel t1.5		

W226.W228.W2210

22U Rackmount Server Cabinet



INTRODUCTION

W2210, W266, W228 are high-quality aluminum structures. Cabinet is complete lockable, cable management tunnels on both sides. this stylish expandable and secure 19" rack cabinet can protect your investment in computer equipment against environmental elements such as heat and dust while adding organization and security to your computer system design.


FEATURES

- A** Universal Fit to Rackmount Chassis from IBM, HP, Dell and iStarUSA Chassis
- B** Front and Rear Security Lock to Prevent Unauthorized Access to Server and Data
- C** Easy Cabling Management System Can Route Cable Front to Back and Top to Bottom
- D** Fully Adjustable Horizontal Mounting Rails to Ensure the Best Fit of Rackmount Chassis
- E** Custom Front Panel Door with Silk Screen Option Can Enhance Product Image and Uniformity in Product Line
- F** Honey-cone Air Grid Provide Maximum Air Flow
- G** Quick Release Doors: Front and Rear Doors Can be Inter-changed with Each Other and Also Can Be Easily Moved to The Opposite Side for Left-handed or Right-handed Hinging
- H** Quick Release Side Panels: Easy Removal Side Panels with Latches are Convenient for Routine Maintenance
- I** Easy Relocation: Heavy-duty Steel Casters Provide the Mobility
- J** Adjustable Leveling Feet Included for Floor Mounting
- K** Labeled U Positions are Convenient for Determining Where to Install Rack-mount Devices



W226.W228.W2210

DRAWING

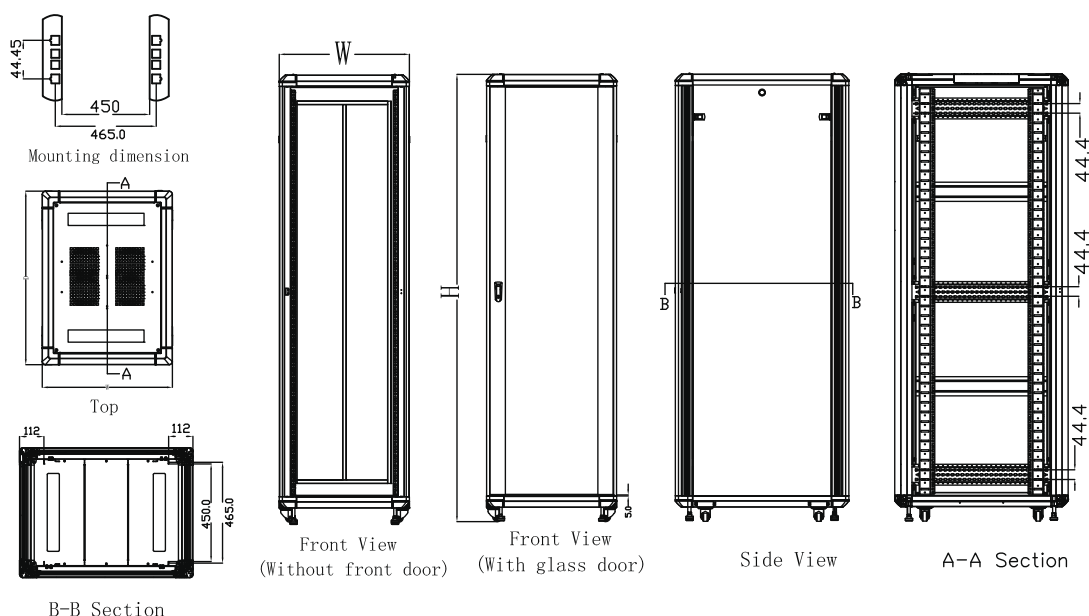

SPECIFICATIONS

Model Number	W226	W228	W2210
RoHS Compliance Version	Yes	Yes	YES
Rack Units	22U	22U	22U
Dimensions [WxHxD]	23.6 x 46.5 x 23.6 inch	23.6 x 46.5 x 31.5 inch	23.6 x 46.5 x 39.37 inch
Internal Height	38.5 inch	38.5 inch	38.5 inch
Internal Dimensions	Post-to-post: 17.75" Hole-to-hole: 18.5" Rail-to-rail: 16.87" Max Depth: 17.25"	Post-to-post: 17.75" Hole-to-hole: 18.5" Rail-to-rail: 16.87" Max Depth: 25.12"	Post-to-post: 17.75" Hole-to-hole: 18.5" Rail-to-rail: 16.87" Max depth: 33"
Basic Equipment	Variable 19" Profiles at Front and Backside Vented Lockable Doors at Front and Backside Lockable Side Panels w/ Quick Lockers		
Cooling	2 120mm 220V AC fans with dust filter system installed on top of cabinet	Up to 4 120mm 220V AC fans with dust filter system can be installed d on top of cabinet	Up to 6 120mm 220V AC fans with dust filter system can be installed d on top of cabinet
Color	RAL7032(Pebble-Grey) / RAL9011(Black) Special Color on Request - Minimum Order 10 pcs		
Safety	TUEV		
EMI Noise Filter	CE		
Packaging Information	Side Panel: 28.25"x47.5"x9.5" Door F/R: 26"x43"x5" Accessories: 23"x23"x4.5" Gross Weights: 152.15 lbs	Side Panel: 36.5"x47.5"x9.5" Door F/R: 26"x43"x5" Accessories: 23"x30"x4.5" Gross Weights: 152.15 lbs	Side Panel: 43.5"x47.5"x10" Door F/R: 26"x43"x5" Accessories: 38"x23"x4.5" Gross Weights: 167 lbs
Materials	Frame: Aluminum Base: SPCC Cold Rolled Steel t1.2 Mounting Rails: SPCC Cold Rolled Steel t2.0 Top Panel: SPCC Cold Rolled Steel t1.2 Side Panels: SPCC Cold Rolled Steel t1.2 Doors: SPCC Cold Rolled Steel t1.5		

W368.W3610

36U Rackmount Server Cabinet



INTRODUCTION

W368 and W3610 are high-quality aluminum structures. Cabinet is complete lockable, cable management tunnels on both sides. this stylish expandable and secure 19" rack cabinet can protect your investment in computer equipment against environmental elements such as heat and dust while adding organization and security to your computer system design.


FEATURES

- A** Universal Fit to Rackmount Chassis from IBM, HP, Dell and iStarUSA Chassis
- B** Front and Rear Security Lock to Prevent Unauthorized Access to Server and Data
- C** Easy Cabling Management System Can Route Cable Front to Back and Top to Bottom
- D** Fully Adjustable Horizontal Mounting Rails to Ensure the Best Fit of Rackmount Chassis
- E** Custom Front Panel Door with Silk Screen Option Can Enhance Product Image and Uniformity in Product Line
- F** Honey-cone Air Grid Provide Maximum Air Flow
- G** Quick Release Doors: Front and Rear Doors Can be Interchanged with Each Other and Also Can Be Easily Moved to The Opposite Side for Left-handed or Right-handed Hinging
- H** Quick Release Side Panels: Easy Removal Side Panels with Latches are Convenient for Routine Maintenance
- I** Easy Relocation: Heavy-duty Steel Casters Provide the Mobility
- J** Adjustable Leveling Feet Included for Floor Mounting
- K** Labeled U Positions are Convenient for Determining Where to Install Rack-mount Devices



W368.W3610

DRAWING

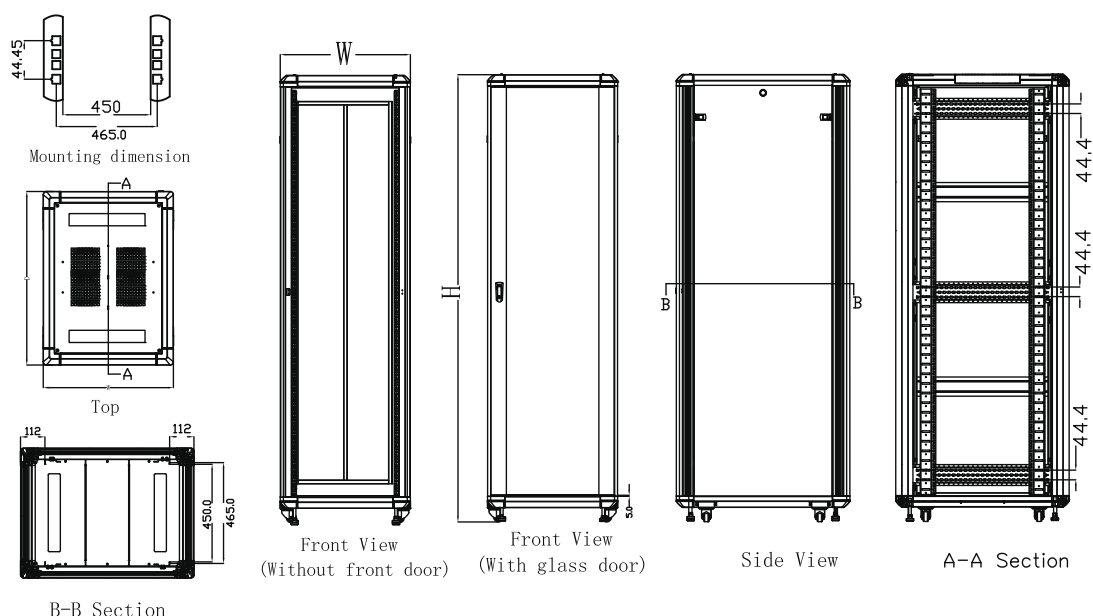

SPECIFICATIONS

Model Number	W368	W3610
RoHS Compliance Version	Yes	Yes
Rack Units	36U	36U
Dimensions [WxHxD]	23.6 x 70.5 x 31.5 inch	23.6 x 70.5 x 39.37 inch
Internal Height	63 inch	63 inch
Internal Dimensions	Post-to-post: 17.75" Hole-to-hole: 18.5" Rail-to-rail: 16.87" Max Depth: 25.12"	Post-to-post: 17.75" Hole-to-hole: 18.5" Rail-to-rail: 16.87" Max Depth: 33"
Basic Equipment	Variable 19" Profiles at Front and Backside Vented Lockable Doors at Front and Backside Lockable Side Panels w/ Quick Lockers	
Cooling	Up to 4 120mm 220V AC fans with dust filter system can be installed d on top of cabinet	Up to 6 120mm 220V AC fans with dust filter system can be installed d on top of cabinet
Color	RAL7032(Pebble-Grey) / RAL9011(Black) Special Color on Request - Minimum Order 10 pcs	
Safety	TUEV	
EMI Noise Filter	CE	
Conformance	ANSI/ELA, RS-310-D, IEC297-2	
Packaging Information	Side Panel: 36.5"x72"x9.5" Door F/R: 26"x67"x5" Accessories: 23"x30"x4.5" Gross Weights: 205.07 lbs	Side Panel: 36.5"x72"x10" Door F/R: 26"x67"x5" Accessories: 38"x23"x4.5" Gross Weights: 223 lbs
Materials	Frame: Aluminum Base: SPCC Cold Rolled Steel t1.2 Mounting Rails: SPCC Cold Rolled Steel t2.0 Top Panel: SPCC Cold Rolled Steel t1.2 Side Panels: SPCC Cold Rolled Steel t1.2 Doors: SPCC Cold Rolled Steel t1.5	

W428.W4210

42U Rackmount Server Cabinet



INTRODUCTION

W428 and W4210 are high-quality aluminum structures. Cabinet is complete lockable, cable management tunnels on both sides. this stylish expandable and secure 19" rack cabinet can protect your investment in computer equipment against environmental elements such as heat and dust while adding organization and security to your computer system design.


FEATURES

- A** Universal Fit to Rackmount Chassis from IBM, HP, Dell and iStarUSA Chassis
- B** Front and Rear Security Lock to Prevent Unauthorized Access to Server and Data
- C** Easy Cabling Management System Can Route Cable Front to Back and Top to Bottom
- D** Fully Adjustable Horizontal Mounting Rails to Ensure the Best Fit of Rackmount Chassis
- E** Custom Front Panel Door with Silk Screen Option Can Enhance Product Image and Uniformity in Product Line
- F** Honey-cone Air Grid Provide Maximum Air Flow
- G** Quick Release Doors: Front and Rear Doors Can be Inter-changed with Each Other and Also Can Be Easily Moved to The Opposite Side for Left-handed or Right-handed Hinging
- H** Quick Release Side Panels: Easy Removal Side Panels with Latches are Convenient for Routine Maintenance
- I** Easy Relocation: Heavy-duty Steel Casters Provide the Mobility
- J** Adjustable Leveling Feet Included for Floor Mounting
- K** Labeled U Positions are Convenient for Determining Where to Install Rack-mount Devices



W428.W4210

DRAWING

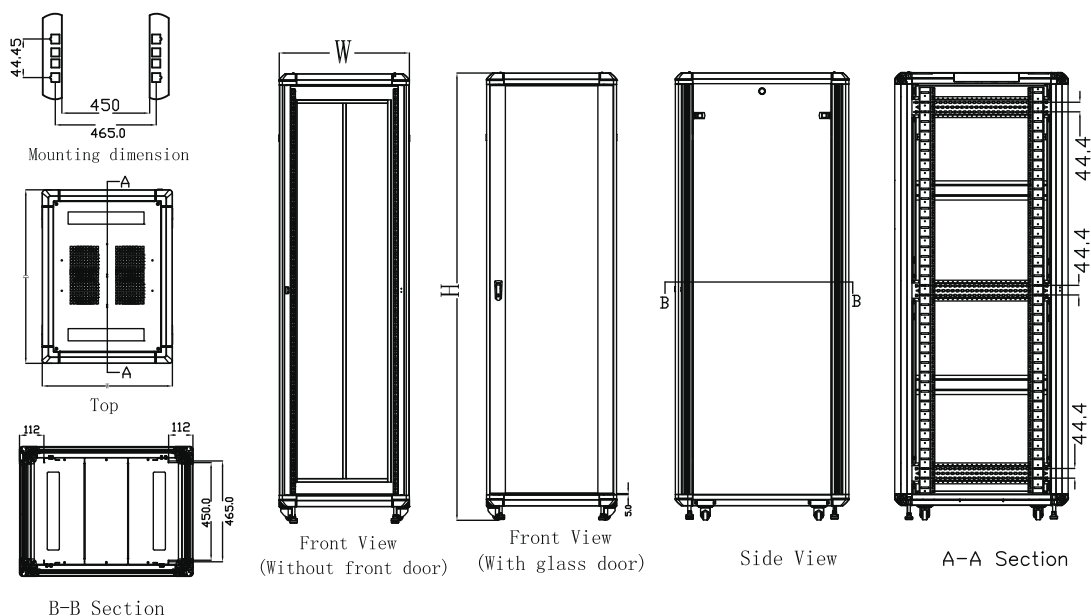

SPECIFICATIONS

Model Number	W428	W4210
RoHS Compliance Version	Yes	Yes
Rack Units	42U	42U
Dimensions [WxHxD]	23.6 x 81.5 x 31.5 inch	23.6 x 81.5 x 39.37 inch
Internal Height	73.5 inch	73.5 inch
Internal Dimensions	Post-to-post: 17.75" Hole-to-hole: 18.5" Rail-to-rail: 16.87" Max Depth: 25.12"	Post-to-post: 17.75" Hole-to-hole: 18.5" Rail-to-rail: 16.87" Max Depth: 33"
Basic Equipment	Variable 19" Profiles at Front and Backside Vented Lockable Doors at Front and Backside Lockable Side Panels w/ Quick Lockers	
Cooling	Up to 4 120mm 220V AC fans with dust filter system can be installed d on top of cabinet	Up to 6 120mm 220V AC fans with dust filter system can be installed d on top of cabinet
Color	RAL7032(Pebble-Grey) / RAL9011(Black) Special Color on Request - Minimum Order 10 pcs	
Safety	TUEV	
EMI Noise Filter	CE	
Conformance	ANSI/ELA, RS-310-D, IEC297-2	
Packaging Information	Side Panel: 36.5"x82"x9.5" Door F/R: 26"x78"x5" Accessories: 23"x30"x4.5" Gross Weights: 229.32 lbs	Side Panel: 43.5"x82"x10" Door F/R: 26"x78"x5" Accessories: 38"x23"x4.5" Gross Weights: 250 lbs
Materials	Frame: Aluminum Base: SPCC Cold Rolled Steel t1.2 Mounting Rails: SPCC Cold Rolled Steel t2.0 Top Panel: SPCC Cold Rolled Steel t1.2 Side Panels: SPCC Cold Rolled Steel t1.2 Doors: SPCC Cold Rolled Steel t1.5	