

External SATA Hard Drive Duplicator

Quick Start Guide | AHDDUB100





qsg Q10113 Copyright © 2009 Aluratek, Inc. All Rights Reserved.

aluratek.com

Highlights and Application

- 1 SATA connector / dock slot
- 2 HDD release button
- 3 LEDs
- 4 Power switch
- 5 Power adapter port
- 6 USB port

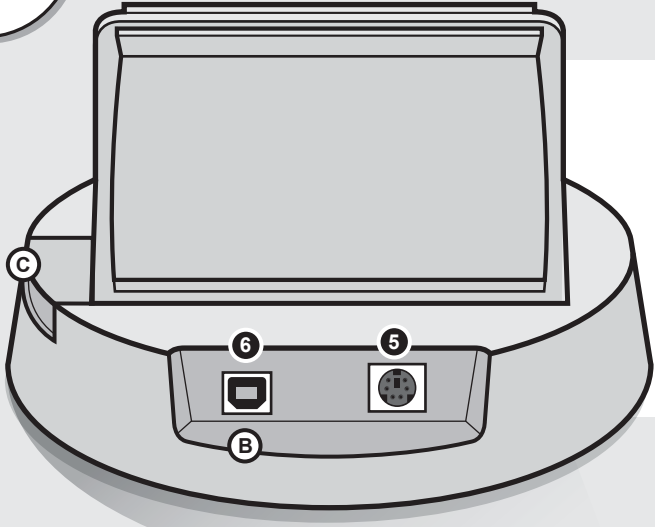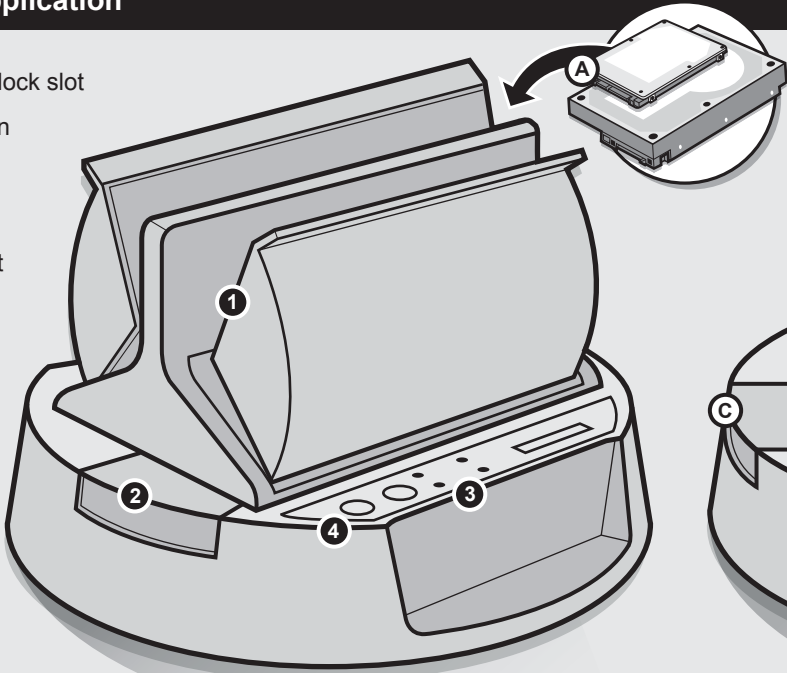

- A Insert either a 2.5" or 3.5" hard drive into the dock slot
- B Connect the USB cable to your computer to transfer data
- C Push the button to release the HDD from the dock

Technical Support

Use AHDDUB100 as a Hard Drive Docking Station:

- Step 1: Make sure the switch is on "JBOD".
- Step 2: Connect the USB Type-B connector to AHDDUB100
- Step 3: Connect the USB Type-A connector to your computer
- Step 4: Insert 1 or 2 drives into the slots
- Step 5: Press the "PWR" button to power on AHDDUB100
- Step 6: For drives that are formatted, you will see the drives in "My Computer". For non-formatted drives, you will need to go to "Disk Management" to format the drive before you can access the drive.

If you need further assistance, please contact the Aluratek support department for troubleshooting prior to returning this device.

E-mail: [support@aluratek.com](mailto:support@aluratek.com)  
Web: [www.aluratek.com/support](http://www.aluratek.com/support)  
Local (Irvine, CA): 949-419-6504  
Toll free: 1-866-580-1978

Introduction

Thank you for choosing Aluratek's® External SATA Hard Drive Duplicator. In addition to making sure only quality materials are used for manufacturing, Aluratek® is also dedicated to provide the best customer satisfaction and support.

The goal of Aluratek is to embody "Simple Elegance" in every product it designs, manufactures and sells.

The product focus of Aluratek is to bring simple yet elegant connectivity solutions to the consumers to enhance their consumer electronics, communications and computing experience. Each product is carefully designed with the consumer in mind. Each product is solution-driven to address the need of the consumers and deliberately planned to provide the ultimate user experience.

Read this guide thoroughly and follow the installation and operation procedures carefully to prevent any damage to the unit and / or any of the devices it connects to.

Features and Requirements

- Duplicator Features:
- Create an exact duplicate copy of your sata hard drive
  - Full System Backup - backs up all your operating system files
  - One touch button backup - no need to connect to your computer
  - Led Indicator light with duplication status

- USB 2.0 Dual Docking Station Features:
- Works as a fully functional USB 2.0 External HD
  - High speed data transfer rate of 480Mbps
  - Ultra cool product design increases your drives life expectancy
  - Transfer data between your computer and your SATA hard drive
  - Supports all 2.5" and 3.5" SATA Hard Drives
  - Plug-n-Play, Hot Swappable and Hot Pluggable
  - Limited 1 year warranty

- Requirements:
- Windows 2000, XP & Vista OR MAC 10.3 or later
  - Available USB 2.0 port

Operating Instructions

Getting Started:

To make a duplicate copy of your hard drive, please remove the hard drive from your computer.


Please make sure the target/blank drive has the same or higher capacity than your source hard drive. The duplication will not start if the target drive has smaller capacity than the source drive.

It is recommended to use the same capacity blank/target hard drive as your source drive because you are making an exact ghost copy of your original hard drive. For example, if your original hard drive (source with data) is 80GB, the duplicated/ghost copy will also be 80GB even if you use a higher capacity drive.


Warning: All data on the target drive will be erased.

Package Contents


Your order has been carefully packaged and inspected. The following should be included in your package. Please inspect the contents of the package to ensure that you have received all items and that nothing has been damaged. If you discover a problem, please contact us immediately for assistance.



External SATA HDD Duplicator



USB 2.0 Cable



Power Adapter



Quick Start Guide



Warranty / Registration Card

Use AHDDUB100 as a Duplicator:

- Step 1: Insert the hard drive that you want to copy (the one with data) into the slot labeled "Source"
- Step 2: Insert the blank hard drive into the slot labeled "Target"
- Step 3: Make sure the switch on AHDDUB100 is on "DUP"
- Step 4: Connect the power adapter to AHDDUB100
- Step 5: Press the "PWR" button to power on AHDDUB100
- Step 6: Press the "START" button to start the duplication process
- Step 7: The duplication process is completed when you see the status bar at 100%
- Step 8: Press the "PWR" button to power off AHDDUB100 & remove the hard drives

Radio and TV Interference Statement

WARNING!!! This equipment has been tested and found to comply with the limits of a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by whatever measures may be required to correct the interference.

Warranty

Aluratek warrants this product against defect in material or workmanship for 1 Year from the date of purchase.

This warranty becomes invalid if the factory-supplied serial number or "warranty void" sticker has been removed or altered on the product.

This warranty does not cover:  
A) Cosmetic damage or damage due to acts of God  
B) Accident, misuse, abuse, negligence or modification of any part of the product.  
C) Damage due to improper operation or maintenance, connection to improper equipment, or attempted repair by anyone other than Aluratek.  
D) Products sold AS IS or WITH FAULTS.

IN NO EVENT SHALL ALURATEK'S LIABILITY EXCEED THE PRICE PAID FOR THE PRODUCT FROM DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THE PRODUCT, IT'S ACCOMPANYING SOFTWARE, OR IT'S DOCUMENTATION.

Aluratek makes no warranty or representation, expressed, implied, or statutory, with respect to it's products, contents or use of this documentation and all accompanying software, and specifically disclaims it's quality, performance, merchantability, or fitness for any particular purpose. Aluratek reserves the right to revise or update it's product, software or documentation without obligation to notify any individual or entity.