




LKV-S02SK/LKV-S04SK

2/4-port Super Slim Desktop KVM Switch

QUICK INSTALLATION GUIDE

Thank you for purchasing the LKV-S02SK/LKV-S04SK Super Slim Desktop KVM Switch! With our highly reliable and quality product, user can enjoy countless benefits from using it.

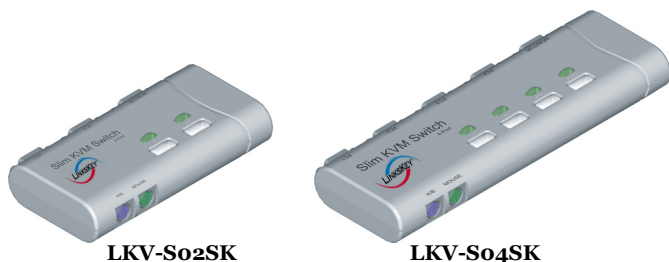

LKV-S02SK

LKV-S04SK



Switch side →

← PC side

The Slim 3-in-1 KVM Combo Cable *
(with integrated all-in-one connector on Switch side)

Introduction

The LKV-S02SK/LKV-S04SK SuperSlimDesktopKVMSwitch is a 2/4-port PS/2 type KVM Switch that provides compact and integrated all-in-one KVM connectors on the Switch side. It enables user to access, control, boot and reboot multiple computers using only one keyboard, video and mouse. LKV-S02SK/LKV-S04SK is of a slim form factor to save your space from over-cluttering with all sorts of cable connectors.

The slim 3-in-1 combo KVM cable is tailored-made to integrate keyboard, video and mouse interfaces all into one connector, thus saving a lot of clumsy movements to make all connectors within good order. It can be your best companion for the management of 2 ~ 4 computers on either SOHO or corporate desktop.

* Note that the length of the Slim 3-in-1 KVM combo cable could vary according to your package.

Before you install

The default setting of the LKV-S02SK/LKV-S04SK Super Slim Desktop KVM Switch is appropriate for most systems. you do not need to configure the KVM Switch before installation. It's a Plug-and-Play device: First, connect the shared keyboard, video and mouse to your KVM Switch and then connect PCs to your KVM Switch using the slim 3-in-1 combo KVM cables. Then boot up your PCs one by one, and you can start to operate the KVM Switch immediately!

For a quick start on installation and operation, please follow the instructions below.



The correct setup sequence is

(1) **Connect the shared keyboard, mouse and monitor to the KVM Switch and then connect the KVM Switch to the computers using the slim 3-in-1 combo KVM cable (with integrated all-in-one connector on Switch side).**

(2) **Power up your connected computers one by one ...**

Since the KVM Switch receives power from the computer's PS/2 interface, it is powered up when you connect the KVM cables to a PC.

Out-of-the-box Installation

Take the Super Slim Desktop KVM Switch out of the box and begin installation....



Before connecting any cable to your KVM Switch, please make sure all of your computers and their peripherals have been powered off. Otherwise, the Switch system might not be set up properly.

Step 1. Make sure all the computers that are to be connected to the KVM Switch and their peripherals are in powered-off state. If not, power them off before you proceed with the following steps.

Step 2. Connect the shared keyboard, monitor and mouse to the corresponding connectors on the rear of your KVM switch.


Step 3. Connect each of your computers to the KVM Switch using the slim 3-in-1 combo KVM cable. You can use individual standard keyboard, mouse and video cables for extension. Depending on the cable you use, the maximum cable distance is limited to 5 ~ 7 meters (15.5 ~ 23 feet).

Applicable models: LKV-S02SK/LKV-S04SK



Since the KVM Switch is powered through the PS/2 interface, it is powered on immediately when connected to the PS/2 keyboard/mouse port of your PC (nonetheless when the PC being in powered off state).

Step 4. (Now your KVM Switch should have been powered-up....) Power up the connected computers, and the keyboard and mouse should be recognized. Now you can begin operating the KVM switch.

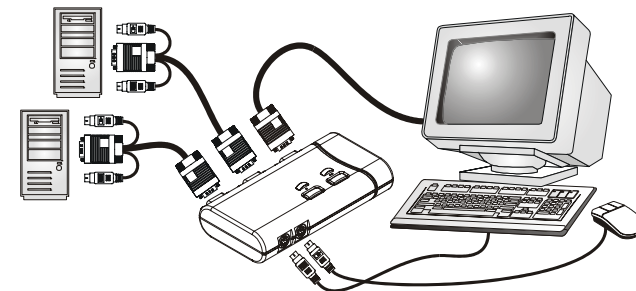

DO NOT TRY to connect the KVM Switch to the computers while the computers are still in powered-on states. Otherwise, the computer will have difficulty recognizing your shared keyboard and mouse.

Easy Operation

There are two methods to select a specific computer: using the **push buttons** or a keyboard **hotkey sequence**.

Push buttons

The push buttons let you have direct control over KVM switch operation and channel switching. Simply press the button to switch to a specific channel. [See Quick Reference Sheet](#)

Keyboard hotkeys

A **keyboard hotkey sequence** consists of three specific keystrokes: [See Quick Reference Sheet](#)

Hotkey sequence = ScrLk + ScrLk + Command key



Keystrokes of a hotkey sequence should follow one another within 2 seconds. Otherwise, the hotkey sequence will not be validated.



For detailed Hotkey sequences and their corresponding functional commands, please refer to the Quick reference sheet.

Quick Reference Sheet

QUICK REFERENCE SHEET LKV-S02SK/LKV-S04SK Super Slim Desktop KVM Switch Keyboard Hotkeys/ Push Buttons Operation Command Set			
Command	Hotkeys	Front-panel Button	Description
Select PC	ScrLk + ScrLk + (x) ¹ (x is a top-row number key) x = 1 ~ 2 or 1 ~ 4 for PC channel number	Press button x for channel x.	Select the active channel, e.g. ScrLk + ScrLk + 1 => select port 1 as active channel
Next lower channel	ScrLk + ScrLk + ↑ (arrow up)	--	Select the next lower connected channel
Next higher channel	ScrLk + ScrLk + ↓ (arrow down)	--	Select the next higher connected channel
Autoscan Beep Sound On/Off	ScrLk + ScrLk + B	--	Toggle on/off the beep sound for switching confirmation while autoscanning
Reset Console Mouse	ScrLk + ScrLk + End	--	Reset mouse on the console side
Autoscan	ScrLk + ScrLk + S	--	Autoscan through every connected channel for quick screen browsing of each channel
Stop Autoscan	Any key on keyboard	--	Terminate Autoscan activity

Notes:

1 Note that (x) denotes a number key for the selected port number (x = 1 ~ 2 or X = 1 ~ 4). Use only the number keys on the upper row of the keyboard.

Hotkey convention: The hotkey notation **ScrLk** + **ScrLk** + **(key)**, denotes that you should hit the individual key consecutively one at a time, not simultaneously.

Technical Support
 E-mail : btitech@linkskey.com
 Website : www.linkskey.com