

Support for the J8177B and J8177C 1000Base-T Mini-GBIC

Important — Ensure the locking latch is at 90 degrees when removing the J8177B or J8177C 1000Base-T Mini-GBIC from your switch. Follow this procedure:

1. Remove the attached cable from the mini-GBIC.



Figure 1. Latch in locked position

2. Swivel the latch 90 degrees to the unlocked position.

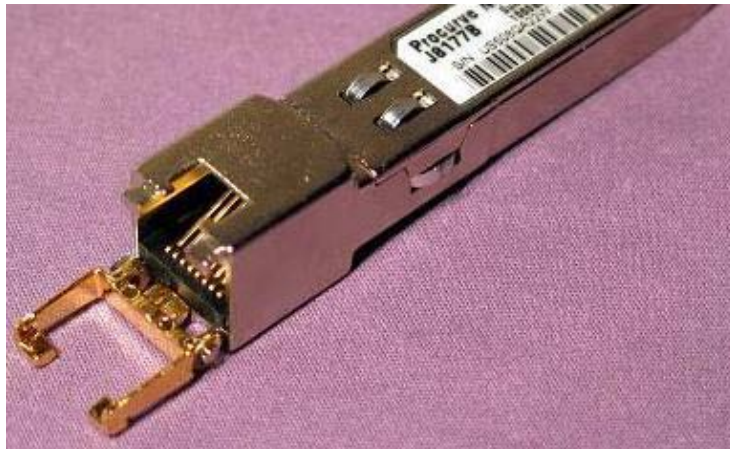


Figure 2. Latch in unlocked position

Caution

DO NOT FORCE THE LATCH.

If latch does not easily swivel 90 degrees:

- a. Move the latch back to the locked position.
 - b. Re-seat the mini-GBIC by pressing it back into the switch.
 - c. Repeat step 2.
-

Product	Minimum Software Required for J8177B and J8177C	Support Notes
Switch 1400 Series J9077A J9078A	N/A	Not supported
1410-24G Switch J9561A	N/A	Not supported
Switch 1700 Series J9079A J9080A	N/A	Not supported
Switch 1800 Series J9028A/B J9029A	N/A	Not supported
1810G Series Switches J9449A J9450A J9660A	For J9449A, J9450A: Not supported. For J9660A: Any software version.	For use in the SFP ports of the J9660A V1810-48G Switch. Not supported in the J9449A or J9450A Switches.
1810G v2 Switches J9801A J9803A	Any software version	For use in the SFP ports of the J9801A 1810-24 v2 and J9803A 1810-24G v2 Switches.
PS1810 Switch J9834A	Any software version	For use in the SFP ports of the the J9834A PS1810-24G Switch.
Switch 2510-24 J9019A/B	N/A	Not supported
Switch 2510-48 J9020A	Any software version	
Switch 2510G Series J9279A J9280A	N/A	Not supported
2520 Series Switches J9137A J9138A J9298A J9299A	N/A	Not supported
2530 Series Switches J9772A J9773A J9774A J9775A J9776A J9777A J9778A J9779A J9780A J9781A J9782A J9783A J9853A J9854A J9855A J9856A	For J9774A, J9777A, J9780A, J9783A: Not supported. For all others: Any software version.	For use in the SFP ports of the 24-port and 48-port 2530 Series Switches. Not supported in the 8-port 2530 Series Switches.
Switch 2600 Series J4899A/B/C J4900A/B/C J8164A J8165A J8762A	N/A	Not supported

Product	Minimum Software Required for J8177B and J8177C	Support Notes
Switch 2610 Series J9085A J9086A J9087A J9088A J9089A	Any software version	
2615-8-PoE Switch J9565A	N/A	Not supported
2620 Series Switches J9623A J9624A J9625A J9626A J9627A	Any software version	
Switch 2800 Series J4903A J4904A	N/A	Not supported
Switch 2810 Series J9021A J9022A	N/A	Not supported
Switch 2900 Series J9049A J9050A	N/A	Not supported
2910al Series Switches J9145A J9146A J9147A J9148A	N/A	Not supported
2915-8G-PoE Switch J9562A	N/A	Not supported
2920 Series Switches J9726A J9727A J9728A J9729A J9836A	Any software version	For use in the dual-speed SFP+ ports of the J9731A 2-Port 10GbE SFP+ Module. (Not supported in the dual-personality SFP ports on front of the switches.)
Switch 3400cl Series J4905A J4906A	N/A	Not supported
3500 Series Switches J9470A J9471A J9472A J9473A	N/A	Not supported
Switch 3500yl Series J8692A J8693A J9310A J9311A	N/A	Not supported
3800 Series Switches J9573A J9574A J9575A J9576A J9584A	Any software version	For use in the dual-speed SFP+ ports of the J9573A 3800-24G-PoE+-2SFP+ Switch, J9574A 3800-48G-PoE+-4SFP+ Switch, J9575A 3800-24G-2SFP+ Switch, and J9576A 3800-48G-4SFP+ Switch, and in both the SFP and SFP+ ports of the J9584A 3800-24SFP-2SFP+ Switch.

Product	Minimum Software Required for J8177B and J8177C	Support Notes
Switch 4100gl Series J4865A J4887A	G.07.69	For use in the J4893A Switch gl 6-Port Mini-GBIC Module, and the J4908A Switch gl 20-Port 10/100/1000 Module. For the Switch gl 10/100/1000 Module (J4908A), the J8177B/C mini-GBIC can be installed in either the upper or lower mini-GBIC port, but will block access to the other port.
Switch 4200vl Series J8770A J8771A J8772A/B J8773A	For the J8776A module: L.10.01 For the J9033A module: L.10.23	For use in the J8776A Switch vl 4-Port Mini-GBIC Module and in the J9033A Switch vl 20-Port Gig-T + 4-Port SFP Module.
Switch 5300xl Series J4819A J4850A	E.09.22	Supported: J4878A/B (Switch xl 4-Port Mini-GBIC Module). Not supported: J4907A (Switch xl 16-Port 10/100/1000 Module).
Switch 5400zl Series J8697A J8698A J9642A J9643A	For J8705A and J8706A modules: Any software version. For the J9308A module: K.14.34 For J9537A, J9549A, J9535A, and J9637A modules: K.15.02.0004	For use in the J8705A Switch zl 20-Port 10/100/1000 + 4-Port Mini-GBIC Module, the J8706A Switch zl 24-Port Mini-GBIC Module, the J9308A 20-Port 10/100/1000 PoE+ and 4-Port SFP zl Module, the J9537A 24-Port SFP v2 zl Module, the J9549A 20-Port Gig-T / 4-Port SFP v2 zl Module, the J9535A 20-Port Gig-T PoE+ / 4-Port SFP v2 zl Module, and the J9637A 12-Port Gig-T PoE+ / 12-Port SFP v2 zl Module.
Switch 5400R Series J9821A J9822A J9823A J9824A J9825A J9826A J9868A	Any software version	For use in the J9537A 24-Port SFP v2 zl Module, the J9549A 20-Port Gig-T / 4-Port SFP v2 zl Module, the J9535A 20-Port Gig-T PoE+ / 4-Port SFP v2 zl Module, and the J9637A 12-Port Gig-T PoE+ / 12-Port SFP v2 zl Module.
Switch 6108 J4902A	N/A	Not supported
6120 Series Blade Switches 498358-B21 516733-B21	Any software version	For use in the SFP ports of the 498358-B21 6120G/XG Blade Switch, and in the dual-speed SFP+ ports of the 516733-B21 6120XG Blade Switch.
Switch 6200yl-24G-mGBIC J8992A	Any software version	For use in all 24 ports of the J8992A Switch 6200yl-24G-mGBIC.
6600 Series Switches J9263A J9264A J9265A J9451A J9452A	N/A	Not supported
Switch 8100fl Series J8727A J8728A	CY.01.02.0050	For use in the J8735A Switch fl 10-Port Mini-GBIC Interface Module.
Switch 8200zl Series J8715A/B J9475A J9640A J9641A	For J8705A and J8706A modules: Any software version. For the J9308A module: K.14.34 For J9537A, J9549A, J9535A, and J9637A modules: K.15.02.0004	For use in the J8705A Switch zl 20-Port 10/100/1000 + 4-Port Mini-GBIC Module, the J8706A Switch zl 24-Port Mini-GBIC Module, the J9308A 20-Port 10/100/1000 PoE+ and 4-Port SFP zl Module, the J9537A 24-Port SFP v2 zl Module, the J9549A 20-Port Gig-T / 4-Port SFP v2 zl Module, the J9535A 20-Port Gig-T PoE+ / 4-Port SFP v2 zl Module, and the J9637A 12-Port Gig-T PoE+ / 12-Port SFP v2 zl Module.

Product	Minimum Software Required for J8177B	Minimum Software Required for J8177C	Support Notes
Switch 9300m Series J4138A J4139A J4874A	07.8.00a	N/A	<p>J8177B is supported in the J4885A (EP Management Module) and J4894A (EP Mini-GBIC Module).</p> <p>J8177B is <u>not</u> supported in the J4856A ("M4-style" Mini-GBIC Module) or J4857A ("M4" Management Module).</p> <p>J8177C is <u>not</u> supported in the Switch 9300m Series.</p> <p>9300m customers can purchase supported J8177B product from the HP Parts Store: www.hp.com/buy/parts Order the J8177-61201, while supplies last.</p>
Switch 9408sl J8680A	02.1.00c	N/A	<p>J8177B is supported in the J8684A ProCurve 9400sl 40-Port Mini-GBIC Module.</p> <p>J8177C is <u>not</u> supported in the Switch 9408sl.</p> <p>9408sl customers can purchase supported J8177B product from the HP Parts Store: www.hp.com/buy/parts Order the J8177-61201, while supplies last.</p>

Download Switch Software from the Web

HP Networking provides software updates for your switch on the HP Networking Web site. Go to www.hp.com/networking/support, search for your product, display that product, and click on **Software downloads** to go to the "Download software" page.

To determine whether you have the latest software, you can compare the software version that is available on the Web site with the version that is currently installed on your switch.

© Copyright 2014 Hewlett-Packard Company, L.P.
The information contained herein is subject to change without notice.

August 2014

