

05795
Horizontal Clamps
with flat foot and adjustable clamping spindle



Material:
Steel or stainless steel

Surface finish:
Galvanized and chromated,
clamping spindle and nuts phosphated,
stainless steel natural finish,
plastic handle oil-resistant

Order example:
05795-0350

Note:
A neoprene pressure pad is supplied with models 05795-0075 and 05795-0150.

An Angle Bracket cannot be supplied in stainless steel with models 05795-0075N and 05795-0150N.




See 05880, 05882, 05885, 05886, 05887, 05890, 05891 for accessories.

Technical Information:
[Download Page 1](#)

Horizontal Clamps with flat foot and adjustable clamping spindle

Order No.	Surface finish	Opening angle of holding arm	Opening angle of handle	Hand force N	Holding force F1 N	Holding force F2 N	Clamping force F3 N	Clamping force F4 N	A	A1	A2	B	B1	B2	B3	B4	C	C1	D	H	L	L1	M	Approx. weight kg
05795-0075	steel	90°	75°	80	500	1100	250	700	13,5	25	5,7	18,4	27	16	5,8	-	19	9,5	5,2	38	116	37	M5x35	0,100
05795-0150	steel	90°	80°	140	1200	2600	400	1000	26	38	6	28	40	20	6,2	22	24	14	5,5	53	170	60	M6x50	0,240
05795-0250	steel	95°	80°	200	1500	3500	800	1950	26	42	8	31	47	23	8,5	26	35	17,5	6,6	68	224	79	M8x60	0,500
05795-0350	steel	90°	75°	250	2500	5500	1150	3100	41,2	59	9	43	59	30	12	39	45	24	8,7	91	274	108	M10x80	0,900
05795-0450	steel	90°	75°	250	3000	6500	1150	3100	41,2	67	13	41,3	67	38	14,2	-	59	27	8,7	110	305	128	M12x100	1,600
05795-0075N	stainless steel	90°	75°	80	500	1100	250	700	13,5	25	5,7	18,4	27	16	5,8	-	19	9,5	5,2	38	116	37	M5x35	0,100
05795-0150N	stainless steel	90°	80°	140	1200	2600	400	1000	26	38	6	28	40	20	6,2	22	24	14	5,5	53	170	60	M6x50	0,240

Construction data

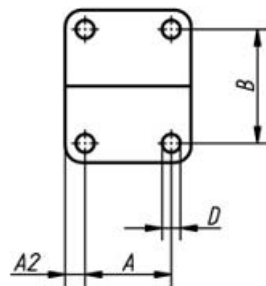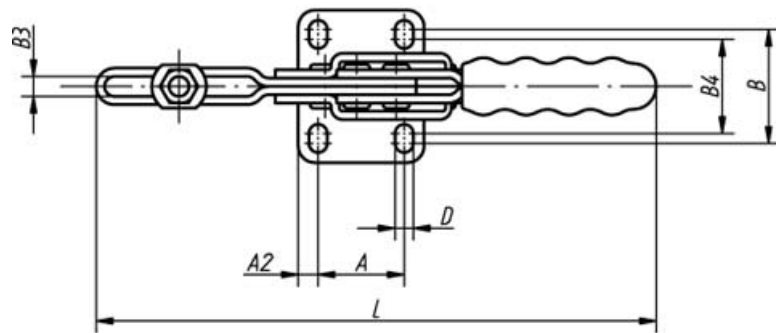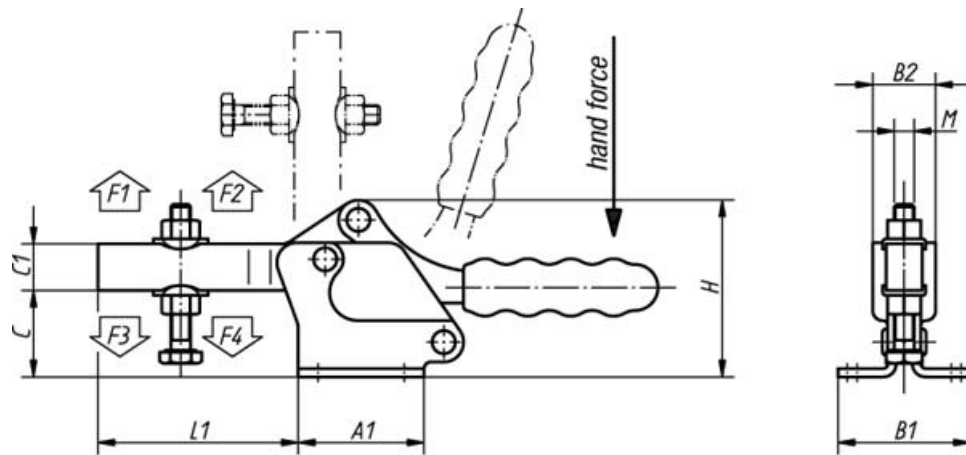

hole arrangement
for Order No.
05795-0075
05795-0450



Angle Bracket for head end
mounting (see accessories)