

Philips
LCD monitor

Philips 42"
multimedia Full HD

BDL4225E



The best all round public signage display

for indoor applications

Control your costs with this network-controllable 42" LCD monitor. Whether used in a network or as a single public display, this model offers a variety of features to meet the most demanding public and corporate viewing applications.

Optimised for public viewing

- Full HD LCD display, 1920 x 1080p
- Enhanced zoom feature supports tiled matrix applications
- HDMI input for full digital HD connection in one cable

Operational flexibility for different applications

- Designed for 24/7 operation
- Monitor is network controllable for remote management
- VGA loop through enables daisy chaining to multiple monitors
- Portrait mode operability

Lower total cost of ownership

- SmartPower for energy saving
- Advanced anti-image sticking function

Sustainable and safe

- Complies with RoHS standards of care for the environment

PHILIPS
sense and simplicity

Highlights

Full HD LCD display 1920 x 1080p

This display has a resolution that is referred to as Full HD. The state-of-the-art LCD screen technology has the full high definition widescreen resolution of 1080 progressive lines, each with 1920 pixels. This allows the best possible picture quality for HD input signals with up to 1080 lines. It produces brilliant flicker-free progressive scan pictures with optimum brightness and superb colours. This vibrant and sharp image will provide you with an enhanced viewing experience.

Zoom function for tiled matrix

The internal zoom function enables easy implementation of a video wall matrix, without the need for expensive external equipment. Capable of a vidiwall of 25 displays by dividing up to 5 displays each horizontally and vertically.

HDMI input

HDMI makes an uncompressed digital RGB connection from the source to the screen. By eliminating conversion to an analogue signal, it

delivers an unblemished image. The non-degraded signal reduces flicker and leads to a clearer picture. HDMI intelligently communicates the highest output resolution with the source device. The HDMI input is fully backwards-compatible with DVI sources but includes digital audio. HDMI uses HDCP copy protection.

Designed for 24/7 operation

Public signage displays are used in the most demanding applications. The displays are therefore specifically designed and tested for heavy duty operation, even when 24/7 is required.

Network controllability: RS232

Network controllability allows user to control and adjust monitors remotely through RS232 protocol.

Signal loop through

Multiple screen daisy chain effectively distributes control and visual content from a

single source to an array of monitors in various locations within a site.

SmartPower

The backlight intensity can be controlled and pre-set by the system to reduce the power consumption by up to 50%, which saves substantially on energy costs.

Advanced anti-image sticking

Static images left on-screen for extended periods of time may leave a "ghost image" or image sticking effect on LCD displays. Although image sticking on LCD displays is not permanent, you want to prevent this happening, especially in locations where content is shown 24/7.

Compliant with RoHS standards

Philips designs and produces display products in compliance with strict Restriction of Hazardous Substances (RoHS) standards that restrict lead and other toxic substances that can harm the environment.



Specifications

Picture/Display

- Diagonal screen size: 42 inch / 107 cm
- Panel resolution: 1920 x 1080p
- Optimum resolution: 1920 x 1080 @ 60 Hz
- Brightness: 500 cd/m²
- Contrast ratio (typical): 1400:1
- Response time (typical): 5 ms
- Aspect ratio: 16:9
- Viewing Angle (H / V): 178 / 178 degree
- Pixel pitch: 0.485 x 0.485
- Display colours: 1.06 Billion colours
- Picture enhancement: 3/2 - 2/2 motion pull down, 3D Combfilter, Motion compens. deinterlacing, Progressive scan, 3D MA deinterlacing, Dynamic contrast enhancement

Supported Display Resolution

Computer formats

Resolution	Refresh rate
640 x 480	60, 67, 72, 75 Hz
800 x 600	56, 60, 72, 75 Hz
1024 x 768	60 Hz
1280 x 768	60 Hz
1280 x 800	60 Hz
1280 x 1024	60 Hz
1360 x 768	60 Hz
1366 x 768	60 Hz
1440 x 900	60 Hz
1600 x 1200	60 Hz
1920 x 1080	60 Hz
1920 x 1200	60 Hz

Video formats

Resolution	Refresh rate
480i	60 Hz
480p	60 Hz
576p	50 Hz
576i	50 Hz
720p	50, 60 Hz
1080i	50, 60 Hz
1080p	50, 60 Hz

Connectivity

- PC: VGA-in D-Sub 15HD, VGA-out D-Sub 15HD, DVI-D x 1, RS232 D-Sub9, RS232 D-sub9 output, 3.5 mm PC audio input x 1
- AV input: HDMI x 1, Component (BNC) x 1, Composite (RCA) x 1, Composite (BNC) x 1, S-video x 1, Audio (L/R) x 2
- AV output: Composite (BNC) x 1, Audio (L/R) x 1

Convenience

- Placement: Portrait, Landscape
- Tiled Matrix: 5 x 5
- Picture in picture:: PBP, PIP, POP
- Screen-saving functions: Pixel shift, Low bright
- Signal Loop Through:: RS232, VGA
- Keyboard control:: Hidden, Lockable
- Remote control signal:: Lockable
- Ease of installation: Carrying Handles
- Energy-saving functions:: Smart Power
- Picture performance: Advanced colour control
- Packaging:: Reusable box
- Network controllable: RS232

Dimensions

- Set dimensions (W x H x D): 1022 x 615 x 129 mm
- Set dimensions in inch (W x H x D): 40.2 x 24.2 x 5.1 inch
- Set dimensions with stand (H x D): 663 x 250 mm
- Set dimensions with stand in inch (H x D): 26.1 x 9.8 inch
- Product weight: 19.8 kg
- Product weight (lb): 43.65
- VESA Mount: 400 x 200 mm

Operating conditions

- Temperature range (operation): 0 - 40 °C
- Relative humidity: 5 - 90 %
- MTBF: 50,000 hour(s)

Power

- Mains power: 90-264 VAC, 50/60 Hz
- Consumption (On mode): Typical: 135 W
- Standby power consumption: <1 W

Sound



- Built-in speakers: 2 x 7 W (8 ohm)

Accessories

- Included accessories: Remote Control, Batteries for remote control, AC Power Cord, VGA cable, User manual on CD-ROM, Quick start guide, Tabletop stand
- Optional accessories: Fixed wall mount, Flexible wall mount, Ceiling mount

Miscellaneous

- Bezel: metallic anthracite

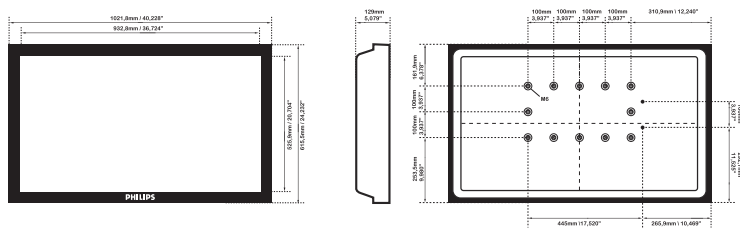

Issue date 2010-10-28

Version: 2.4.2

12 NC: 8670 000 58236
EAN: 87 12581 51556 0

© 2010 Koninklijke Philips Electronics N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com

- Warranty: Europe/North America: 3 years
- On-Screen Display Languages: English, French, German, Italian, Polish, Turkish, Russian, Simplified Chinese
- Regulatory approvals: CE, FCC, Class B, CCC, RoHS